

产品规格书 Product Specification


产品外观及设计性能参数 / Product appearance and technical parameters



性能参数 Performance Parameters		
名称 Product Name	QC4.10-cd (16mm² 车削件连接器) QC4.10-cd (16mm² turning connector)	
认证 Certificate	TUV 证书编号 TUV Certificate NO	No.B 077362
额定电流 Rated Current	TUV	80A
适用电缆外径 Applicable Cable Diameter	堵头一 Plug 1	Φ8.5-Φ9.7mm
	堵头二 Plug 2	Φ9.7-Φ10.6mm
防护等级 IP Degree	IP68 (1m, 1h) /IP65	
额定电压 Rated Voltage	1500V	
温度范围 Temperature Range	-40℃~ +85℃	
温度上限 Temperature Upper	115℃	
过电压类别 Overvoltage Class	III	
污染等级 Class Of Pollution	2	
接触电阻 Resistance Of Connector	≤ 0.5mΩ	

额定脉冲电压 Rated Pulse Voltage	16KV
端子材质 Terminal Material	铜, 镀锡 Copper, tinned
绝缘材料 Insulant	PC、PA
阻燃等级 Flame Retardant Rating	UL94: V-0

连接器图档 / Connector drawing

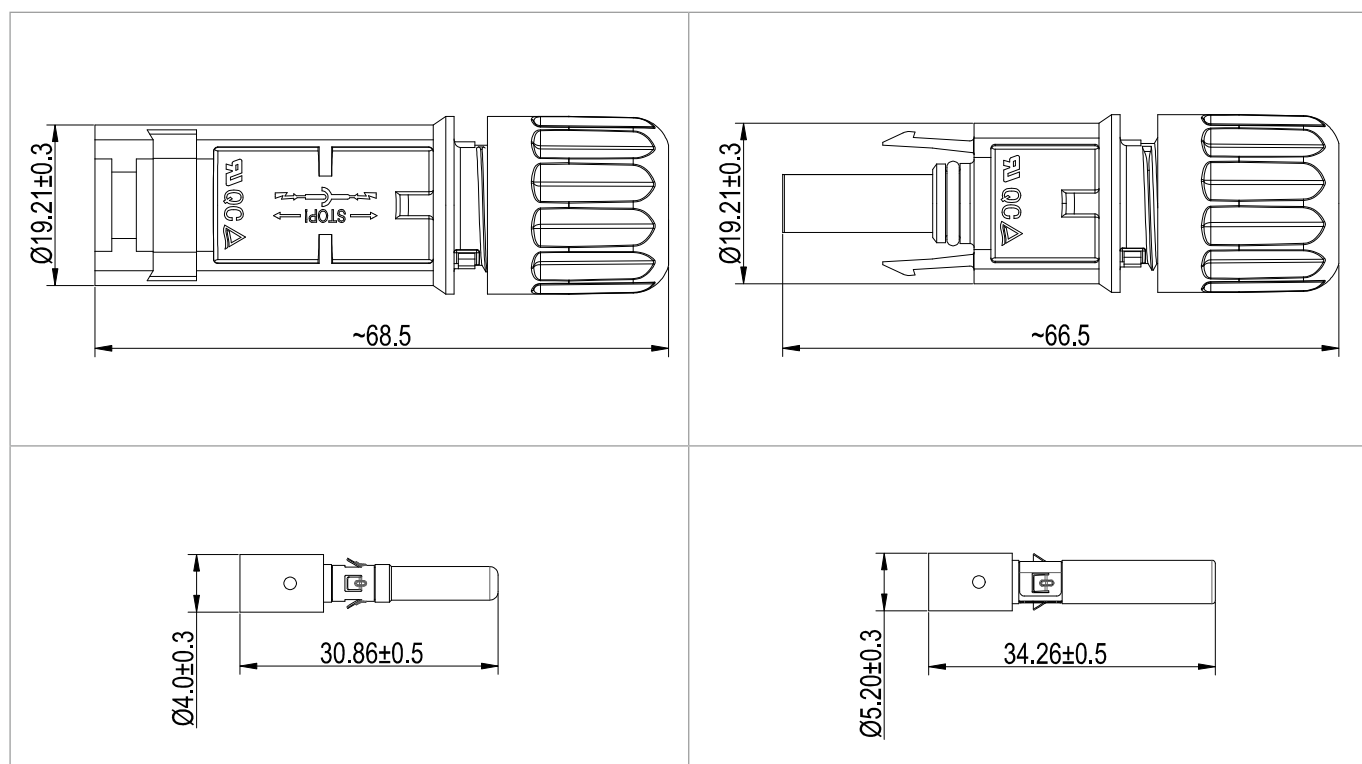

注：本文件如有更改，恕不另行通知。解释权归苏州快可光伏电子股份有限公司所有。

Note: This document is subject to change without notice. The right of interpretation belongs to QC Solar (Suzhou) Corporation.