

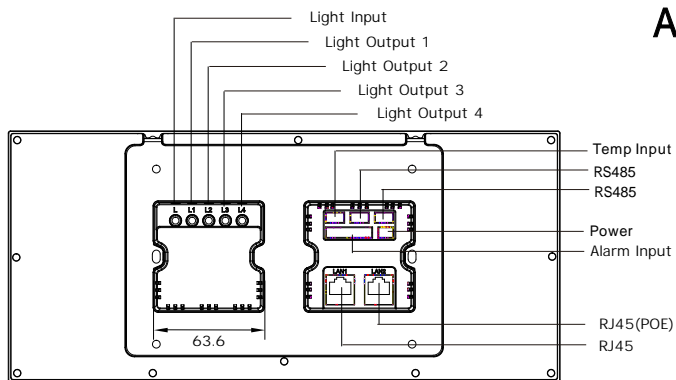


Product Overview

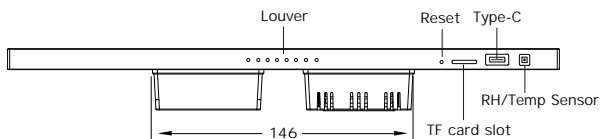

Accessories

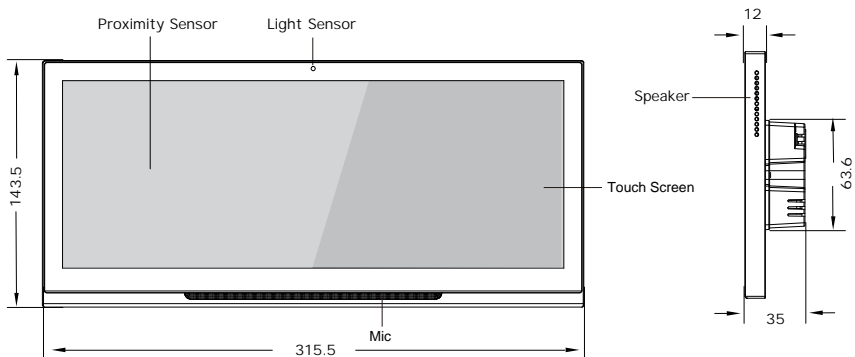

2-Pin cable x 1




3-Pin cable x 3



11-Pin cable x 1

Installation

Step 1: Mounting bracket installation

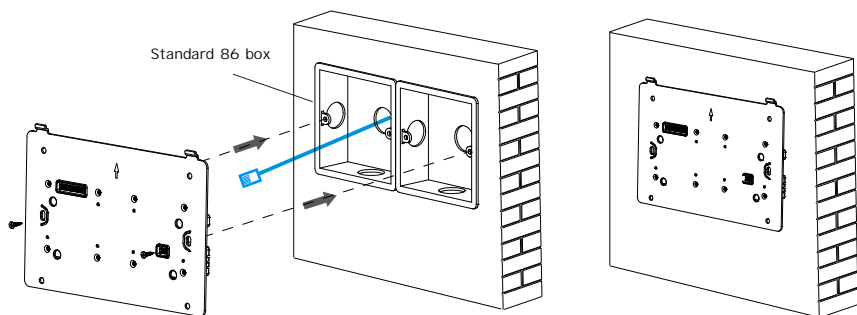


Pre-install 2x86 boxes in the wall, connect cables to the corresponding ports on the mounting box (please refer to the device wiring section).
Fasten the mounting bracket to box by using screws.

Note: Please make sure the hooks are facing up and outward.

The mounting bracket installation is done.

Step 2: Device installation




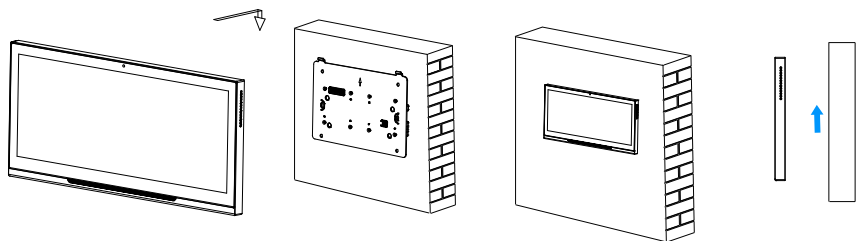


Align the holes on the back of the device with the hooks of the mounting box and clip in.


The device installation is done.

Pull from the bottom and push up to remove the device.

Device Wiring

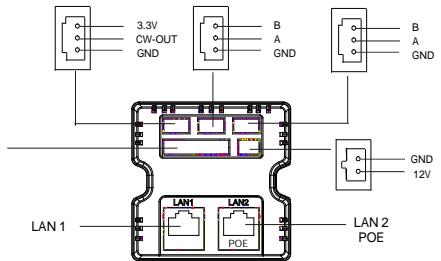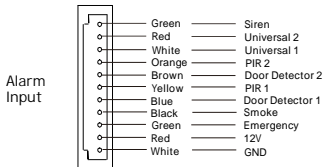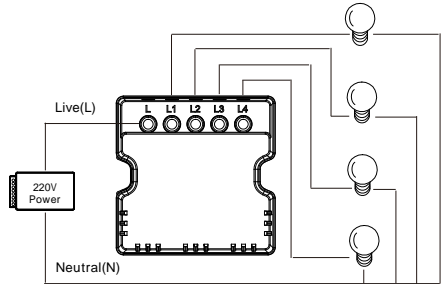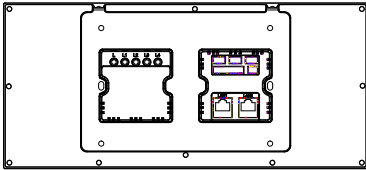

Network Topology

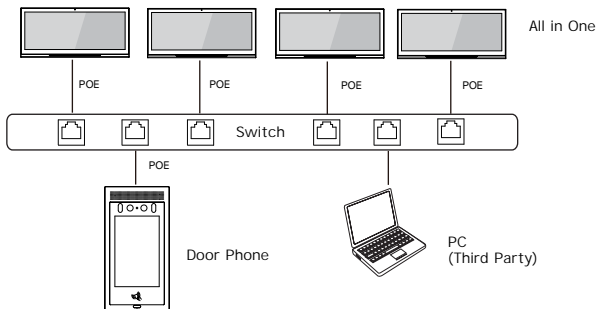

Notice information:
For the system configuration, please visit <http://en.taichuan.com/service/>
Or contact us by:
Technical support email: globalmarket@taichuan.com
Telephone: +86-756-8665853