



## AUTO PARTS 汽车配件

AUTO RELAY 汽车继电器 ↗

AUTO WIRING HARNESS 汽车线束 ↗

AUTO WIPER 汽车雨刷片 ↗

**乐清市维那电器有限公司**  
YUEQING WEINA ELECTRIC CO.,LTD

**WNR101-1**




**技术参数 Technical Specifications**

触点形式 Contact Form	1A/1B/1C/1U/2A
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	40A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	28 × 28 × 25.5

**适用车型 Application**

通用: 4插&5插 Universal; 4 Pin & 5 Pin

**接线图 Wiring Diagram & External Dimension**

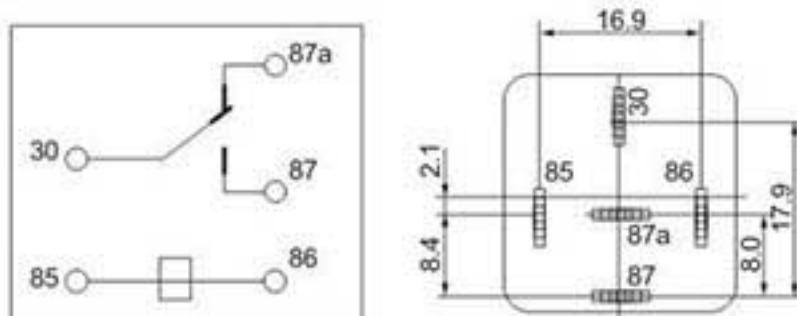

**WNR101-2**




**技术参数 Technical Specifications**

触点形式 Contact Form	1A/1B/1C/1U/2A
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	40A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	28 × 28 × 25.5

**适用车型 Application**

通用: 4插&5插 Universal; 4 Pin & 5 Pin

**接线图 Wiring Diagram & External Dimension**

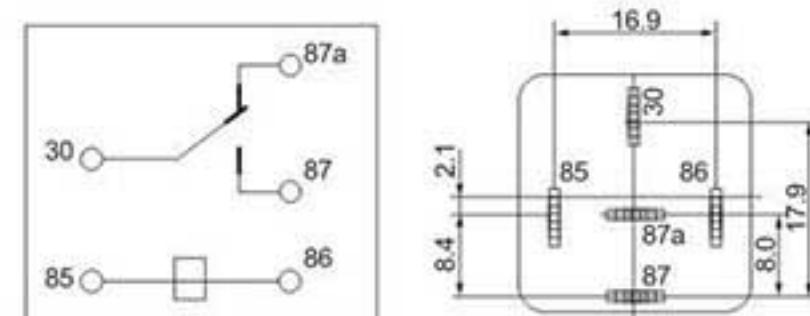

**WNR101-3**




**技术参数 Technical Specifications**

触点形式 Contact Form	1A/1B/1C/1U/2A
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	40A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	28 × 28 × 25.5

**适用车型 Application**

通用: 4插&5插 Universal; 4 Pin & 5 Pin

**接线图 Wiring Diagram & External Dimension**

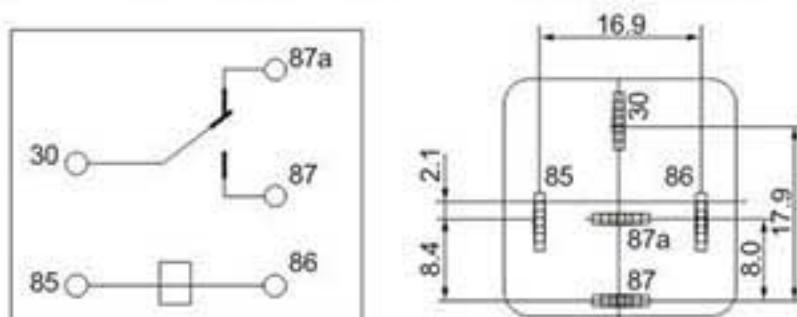

**WNR101-4**




**技术参数 Technical Specifications**

触点形式 Contact Form	1A/1B/1C/1U/2A
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	40A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	28 × 28 × 25.5

**适用车型 Application**

通用: 4插&5插 Universal; 4 Pin & 5 Pin

**接线图 Wiring Diagram & External Dimension**

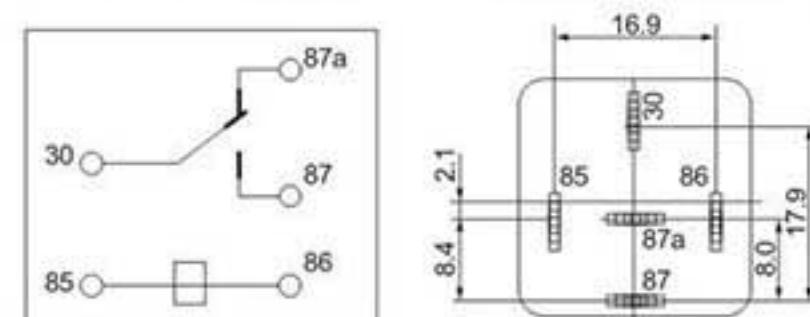

**WNR101-5**




**技术参数 Technical Specifications**

触点形式 Contact Form	1A/1B/1C/1U
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	40A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	28 × 28 × 25.5

**适用车型 Application**

通用: 4插&5插 Universal; 4 Pin & 5 Pin

**接线图 Wiring Diagram & External Dimension**

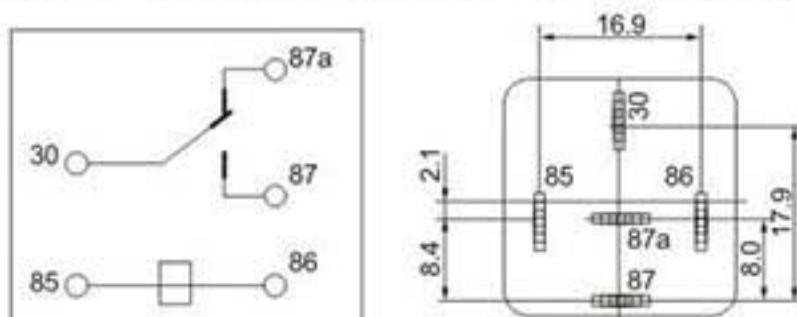

**WNR101-6**




**技术参数 Technical Specifications**

触点形式 Contact Form	1A/1B/1C/1U
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	40A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	28 × 28 × 25.5

**适用车型 Application**

通用: 4插&5插 Universal; 4 Pin & 5 Pin

**接线图 Wiring Diagram & External Dimension**

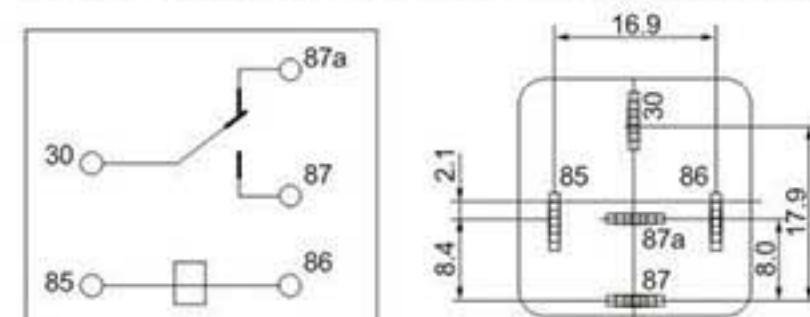

**WNR101-7**




**技术参数 Technical Specifications**

触点形式 Contact Form	1A/1B/1C/1U
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	40A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	28 × 28 × 25.5

**适用车型 Application**

通用: 4插&5插 Universal; 4 Pin & 5 Pin

**接线图 Wiring Diagram & External Dimension**

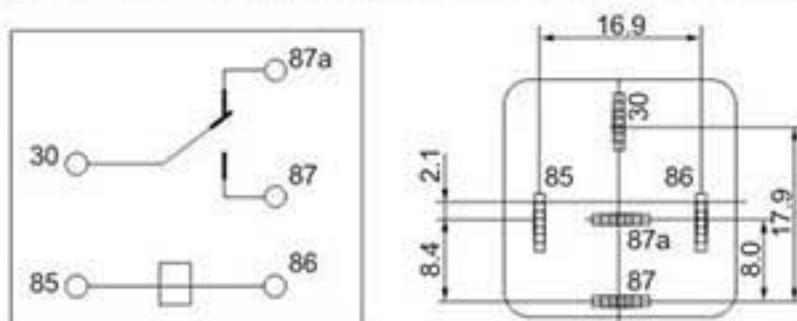

**WNR101-8**




**技术参数 Technical Specifications**

触点形式 Contact Form	1A/1B/1C/1U
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	40A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	28 × 28 × 25.5

**适用车型 Application**

通用: 4插&5插 Universal; 4 Pin & 5 Pin

**接线图 Wiring Diagram & External Dimension**

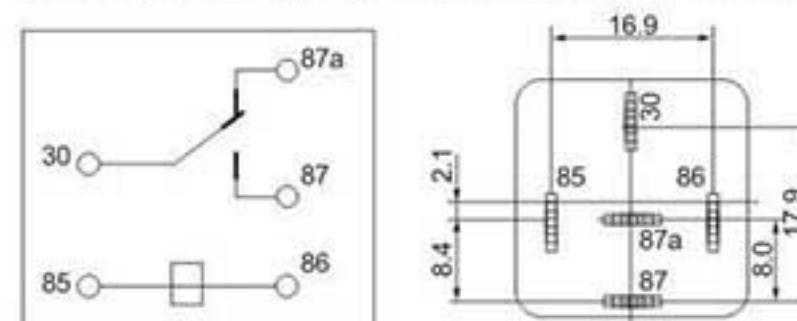

**WNR101-9**




**技术参数 Technical Specifications**

触点形式 Contact Form	1A/1B/1C/1U
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	40A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	28 × 28 × 25.5

**适用车型 Application**

通用: 4插&5插 Universal; 4 Pin & 5 Pin

**接线图 Wiring Diagram & External Dimension**

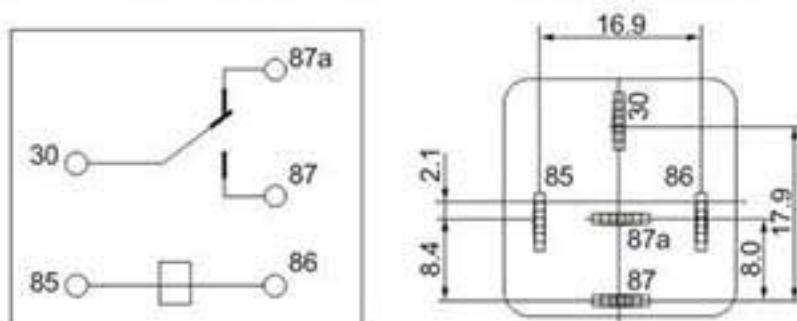

**WNR101-10**




**技术参数 Technical Specifications**

触点形式 Contact Form	1A/1C
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	40A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	28 × 28 × 25.5

**适用车型 Application**

通用: 4插&5插 Universal; 4 Pin & 5 Pin

**接线图 Wiring Diagram & External Dimension**

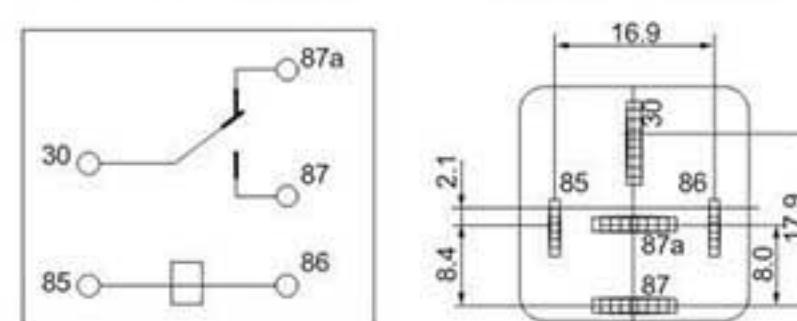

**WNR101-11**




**技术参数 Technical Specifications**

触点形式 Contact Form	1A/1C
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	40A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	28 × 28 × 25.5

**适用车型 Application**

通用: 4插&5插 Universal; 4 Pin & 5 Pin

**接线图 Wiring Diagram & External Dimension**

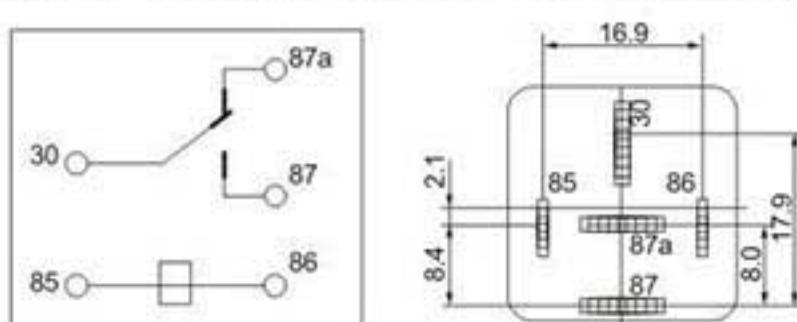

**WNR101-12**




**技术参数 Technical Specifications**

触点形式 Contact Form	1A/1B/1C/1U
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	40A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	28 × 28 × 25.5

**适用车型 Application**

通用: 4插&5插 Universal; 4 Pin & 5 Pin

**接线图 Wiring Diagram & External Dimension**

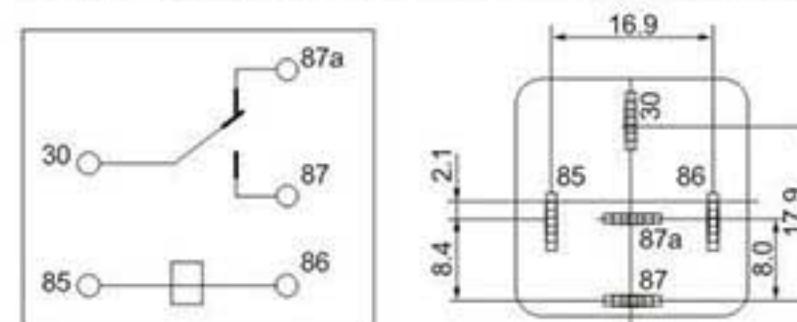

**WNR101-13**


**技术参数 Technical Specifications**

触点形式 Contact Form	1A/1B/1C/1U
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	40A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	28 × 28 × 25.5

**适用车型 Application**

通用: 4插&5插 Universal; 4 Pin & 5 Pin

**接线图 Wiring Diagram & External Dimension**

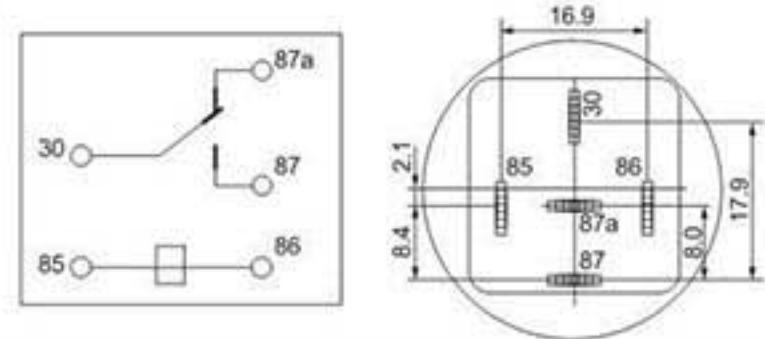

**WNR101-15**


**技术参数 Technical Specifications**

触点形式 Contact Form	1A/1C
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	80A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	28 × 28 × 25.5

**适用车型 Application**

通用: 4插&5插 Universal; 4 Pin & 5 Pin

**接线图 Wiring Diagram & External Dimension**

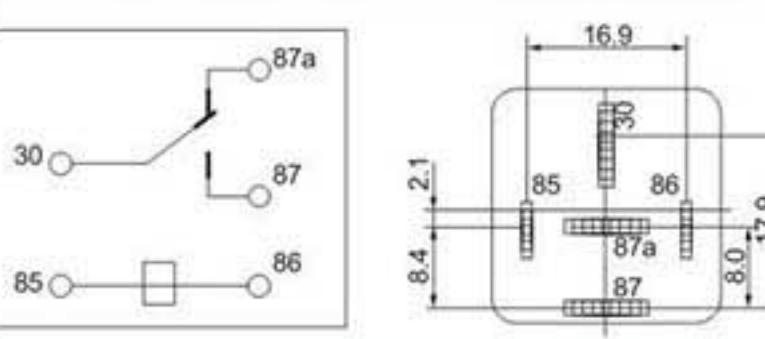

**WNR101-17**


**技术参数 Technical Specifications**

触点形式 Contact Form	1A
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	40A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.6W、1.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	28 × 23 × 41.5

**适用车型 Application**

昌河、哈飞、长安(空调)  
Changhe, Hafei, Changan(Air-conditioning)

**接线图 Wiring Diagram & External Dimension**

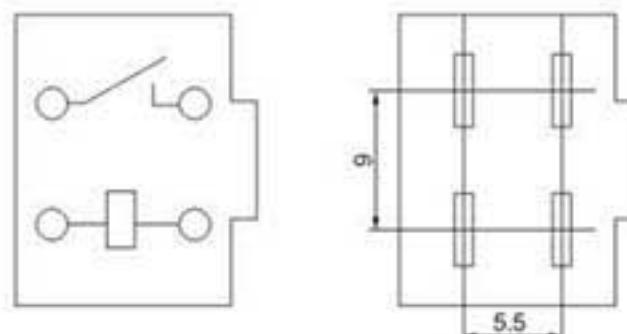

**WNR101-14**


**技术参数 Technical Specifications**

触点形式 Contact Form	1A/1C
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	40A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	28 × 28 × 25.5

**适用车型 Application**

通用: 4插&5插 Universal; 4 Pin & 5 Pin

**接线图 Wiring Diagram & External Dimension**

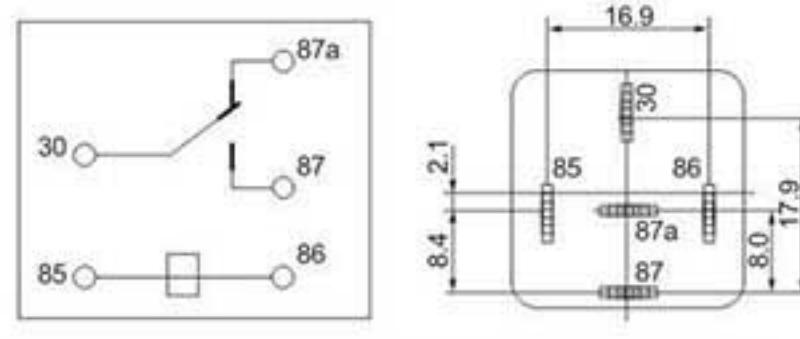

**WNR101-16**


**技术参数 Technical Specifications**

触点形式 Contact Form	1A
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	40A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.6W、1.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	28 × 23 × 41.5

**适用车型 Application**

昌河、哈飞、长安(空调)  
Changhe, Hafei, Changan(Air-conditioning)

**接线图 Wiring Diagram & External Dimension**

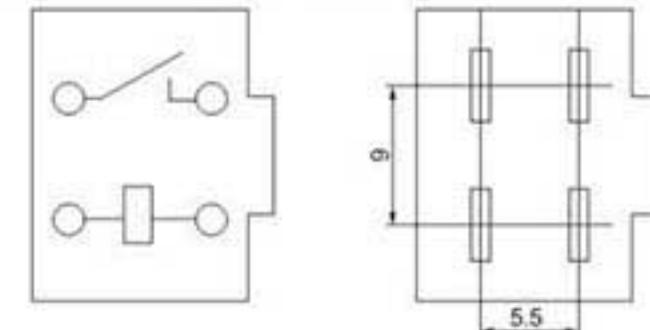

**WNR101-18**


**技术参数 Technical Specifications**

触点形式 Contact Form	1A
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	40A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.6W、1.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	28 × 23 × 41.5

**适用车型 Application**

昌河、哈飞、长安(空调)  
Changhe, Hafei, Changan(Air-conditioning)

**接线图 Wiring Diagram & External Dimension**

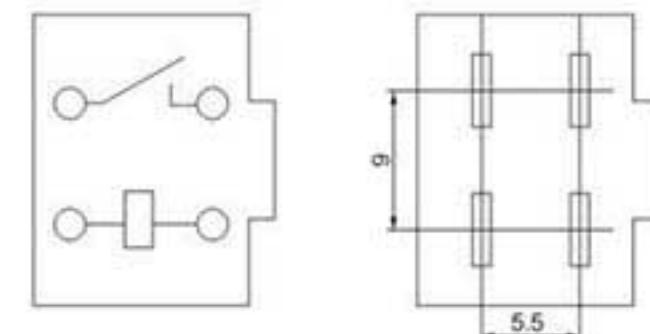

**WNR101-19**


**技术参数 Technical Specifications**

触点形式	Contact Form	1A
触点材料	Contact Material	银合金 Silver Alloy
额定电流	Rated Switching Current	40A
线圈电压	Coil Voltage	12V、24V
线圈功耗	Coil Power Consumption	1.6W、1.8W
电器寿命	Electrical Life	10 <sup>5</sup> times
引出端形式	Terminal Shape	Quick Connection
外形尺寸	External Dimension(mm)	28×23×41.5

**适用车型 Application**

昌河、哈飞、长安(空调)  
Changhe、Hafei、Changan(Air-conditioning)

**接线图 Wiring Diagram & External Dimension**

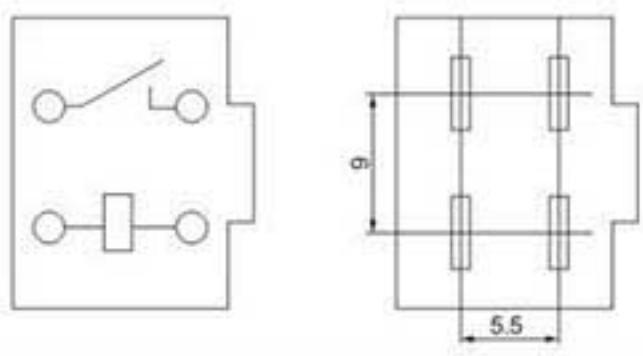

**WNR101-20**


**技术参数 Technical Specifications**

触点形式	Contact Form	1A
触点材料	Contact Material	银合金 Silver Alloy
额定电流	Rated Switching Current	40A
线圈电压	Coil Voltage	12V、24V
线圈功耗	Coil Power Consumption	1.6W、1.8W
电器寿命	Electrical Life	10 <sup>5</sup> times
引出端形式	Terminal Shape	Quick Connection
外形尺寸	External Dimension(mm)	22×17×38

**适用车型 Application**

起亚、现代、金杯、昌河  
Kia、Hyundai、Jinbei、Changan

**接线图 Wiring Diagram & External Dimension**

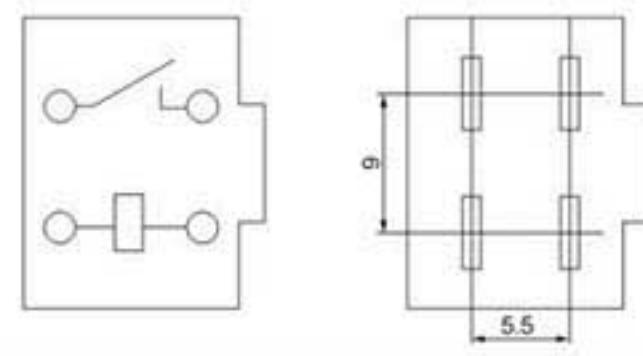

**WNR101-21**


**技术参数 Technical Specifications**

触点形式	Contact Form	1A/1C
触点材料	Contact Material	银合金 Silver Alloy
额定电流	Rated Switching Current	30A
线圈电压	Coil Voltage	12V、24V
线圈功耗	Coil Power Consumption	1.6W、1.8W
电器寿命	Electrical Life	10 <sup>5</sup> times
引出端形式	Terminal Shape	PCB
外形尺寸	External Dimension(mm)	23×13.5×13.5

**适用车型 Application**

4119、4120；6插&7插 4119、4120; 6 Pin & 7 Pin

**接线图 Wiring Diagram & External Dimension**

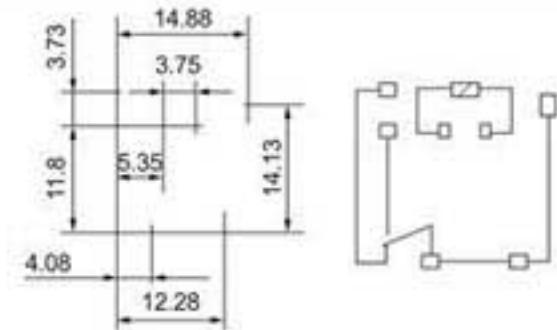

**WNR101-22**


**技术参数 Technical Specifications**

触点形式	Contact Form	1A/1C
触点材料	Contact Material	银合金 Silver Alloy
额定电流	Rated Switching Current	30A
线圈电压	Coil Voltage	12V、24V
线圈功耗	Coil Power Consumption	1.6W、1.8W
电器寿命	Electrical Life	10 <sup>5</sup> times
引出端形式	Terminal Shape	PCB
外形尺寸	External Dimension(mm)	23×13.5×13.5

**适用车型 Application**

4119、4120；6插&7插 4119、4120; 6 Pin & 7 Pin

**接线图 Wiring Diagram & External Dimension**

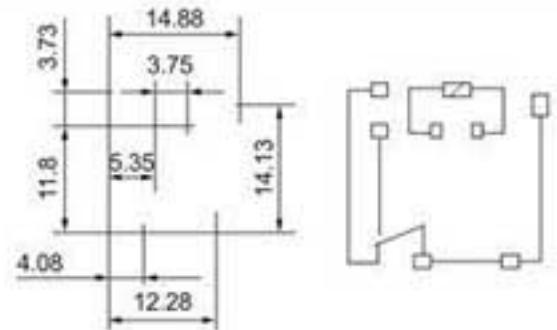

**WNR101-23**


**技术参数 Technical Specifications**

触点形式	Contact Form	1A/1B/1C
触点材料	Contact Material	银合金 Silver Alloy
额定电流	Rated Switching Current	30A
线圈电压	Coil Voltage	12V、24V
线圈功耗	Coil Power Consumption	1.6W、1.8W
电器寿命	Electrical Life	10 <sup>5</sup> times
引出端形式	Terminal Shape	Quick Connection
外形尺寸	External Dimension(mm)	21×15.5×22

**适用车型 Application**

通用；4插&5插 Universal; 4 Pin & 5 Pin

**接线图 Wiring Diagram & External Dimension**

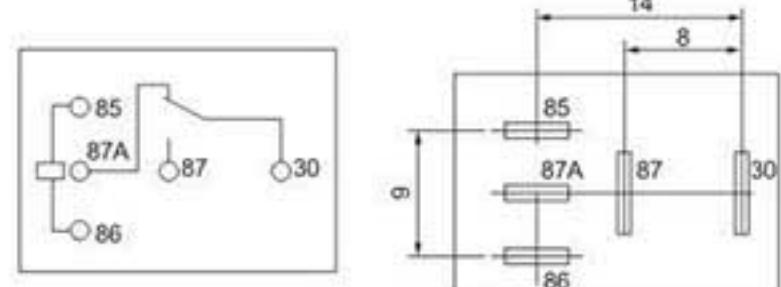

**WNR101-24**



**技术参数 Technical Specifications**

触点形式	Contact Form	1A/1B/1C
触点材料	Contact Material	银合金 Silver Alloy
额定电流	Rated Switching Current	30A
线圈电压	Coil Voltage	12V、24V
线圈功耗	Coil Power Consumption	1.6W、1.8W
电器寿命	Electrical Life	10 <sup>5</sup> times
引出端形式	Terminal Shape	Quick Connection
外形尺寸	External Dimension(mm)	21×15.5×22

**适用车型 Application**

通用；4插&5插 Universal; 4 Pin & 5 Pin

**接线图 Wiring Diagram & External Dimension**

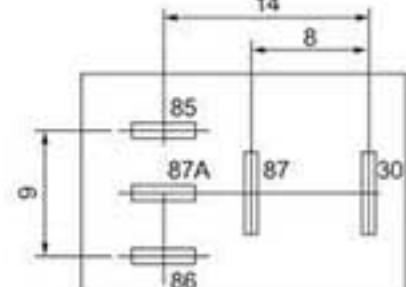

**WNR101-25**


**技术参数 Technical Specifications**

触点形式 Contact Form	1A/1B/1C
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	30A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.6W、1.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	21×15.5×22

**适用车型 Application**

奇瑞、QQ Chery、QQ

**接线图 Wiring Diagram & External Dimension**

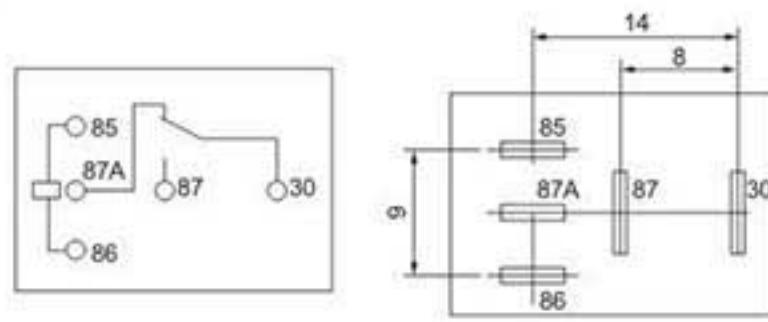

**WNR101-27**


**技术参数 Technical Specifications**

触点形式 Contact Form	1A/1C
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	20A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.6W、1.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	PCB
外形尺寸 External Dimension(mm)	23×13.5×25.5

**适用车型 Application**

JQC

**接线图 Wiring Diagram & External Dimension**

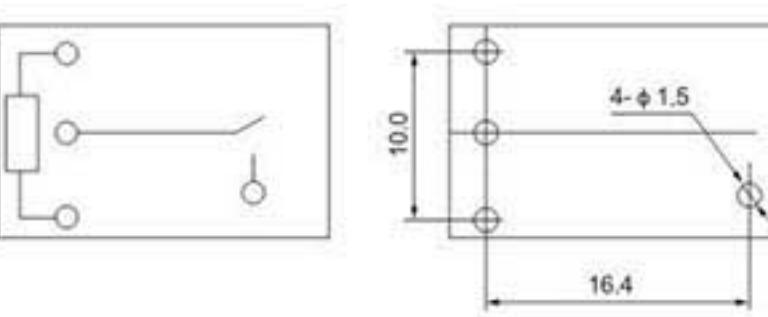

**WNR101-29**


**技术参数 Technical Specifications**

触点形式 Contact Form	1A/1C/1U
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	40A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.6W、1.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	26.5×26.5×41

**适用车型 Application**

通用：4插&5插 Universal; 4 Pin & 5 Pin

**接线图 Wiring Diagram & External Dimension**

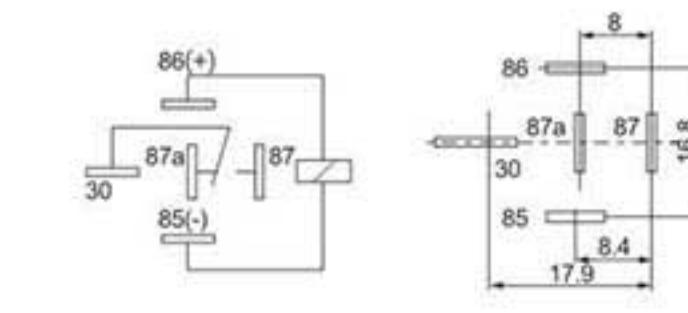

**WNR101-26**


**技术参数 Technical Specifications**

触点形式 Contact Form	1A/1B/1C
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	30A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.6W、1.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	21×15.5×22

**适用车型 Application**

东风、天龙 Dongfeng、Denon

**接线图 Wiring Diagram & External Dimension**

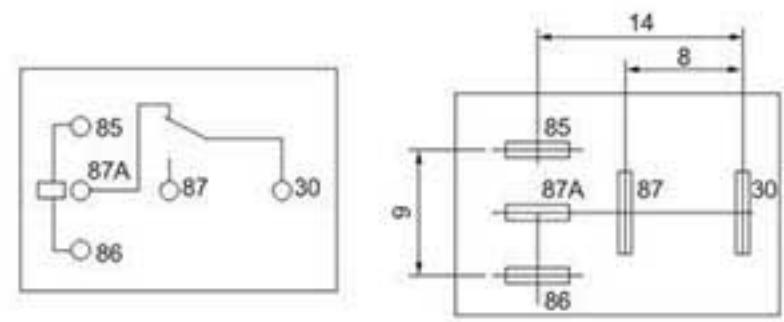

**WNR101-28**


**技术参数 Technical Specifications**

触点形式 Contact Form	1A/1C
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	20A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.6W、1.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	PCB
外形尺寸 External Dimension(mm)	23×13.5×25.5

**适用车型 Application**

JQC

**接线图 Wiring Diagram & External Dimension**

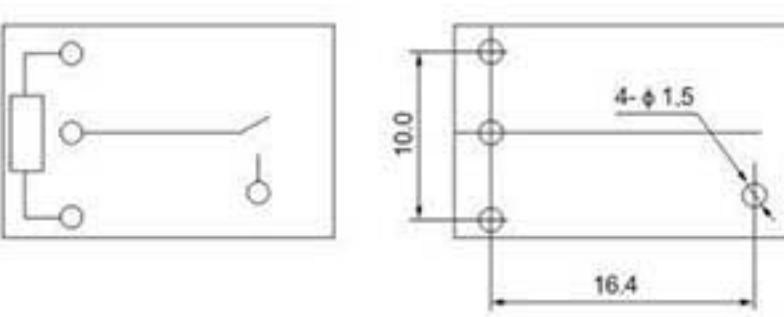

**WNR101-30**


**技术参数 Technical Specifications**

触点形式 Contact Form	1A/1C/1U
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	40A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.6W、1.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	26.5×26.5×24.5

**适用车型 Application**

通用：4插&5插 Universal; 4 Pin & 5 Pin

**接线图 Wiring Diagram & External Dimension**

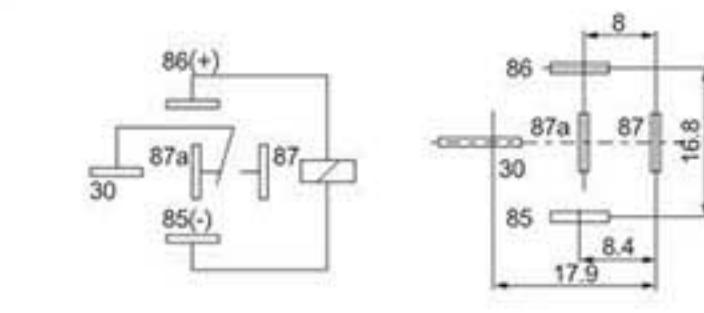

**WNR101-31**


**技术参数 Technical Specifications**

触点形式 Contact Form	1A/1B/1C
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	40A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.6W、1.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	26.5 × 26.5 × 24.5

**适用车型 Application**

通用; 4插&5插 Universal; 4 Pin & 5 Pin

**接线图 Wiring Diagram & External Dimension**

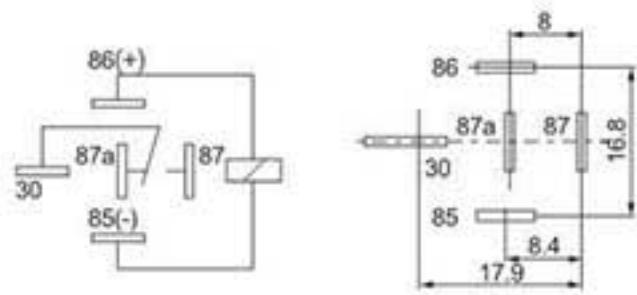

**WNR101-33**


**技术参数 Technical Specifications**

触点形式 Contact Form	1A/1B/1C
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	40A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.6W、1.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	26.5 × 26.5 × 24.5

**适用车型 Application**

通用; 4插&5插 Universal; 4 Pin & 5 Pin

**接线图 Wiring Diagram & External Dimension**

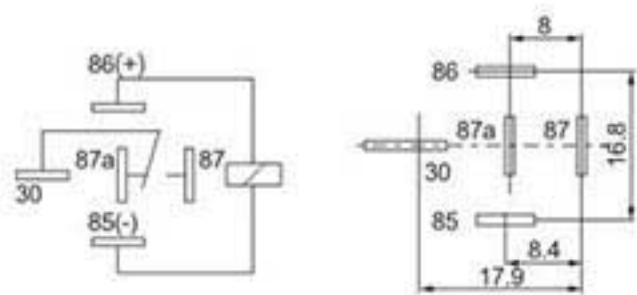

**WNR101-35**


**技术参数 Technical Specifications**

触点形式 Contact Form	1A/1B/1C/1U
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	40A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	28 × 28 × 25.5

**适用车型 Application**

通用; 4插&5插 Universal; 4 Pin & 5 Pin

**接线图 Wiring Diagram & External Dimension**

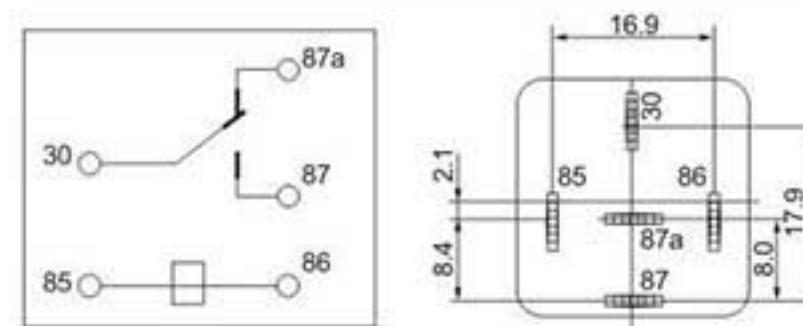

**WNR101-32**


**技术参数 Technical Specifications**

触点形式 Contact Form	1A/1B/1C
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	40A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.6W、1.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	26.5 × 26.5 × 24.5

**适用车型 Application**

通用; 4插&5插 Universal; 4 Pin & 5 Pin

**接线图 Wiring Diagram & External Dimension**

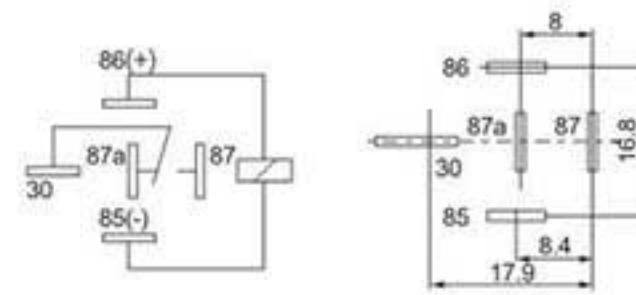

**WNR101-34**


**技术参数 Technical Specifications**

触点形式 Contact Form	1A/1B/1C
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	40A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.6W、1.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	26.5 × 26.5 × 24.5

**适用车型 Application**

通用; 4插&5插 Universal; 4 Pin & 5 Pin

**接线图 Wiring Diagram & External Dimension**

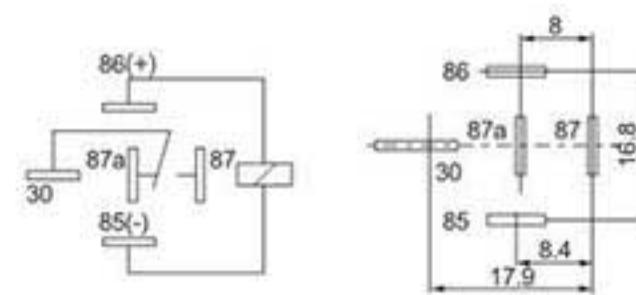

**WNR101-36**


**技术参数 Technical Specifications**

触点形式 Contact Form	1A/1B/1C/1U
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	40A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	28 × 28 × 25.5

**适用车型 Application**

通用; 4插&5插 Universal; 4 Pin & 5 Pin

**接线图 Wiring Diagram & External Dimension**

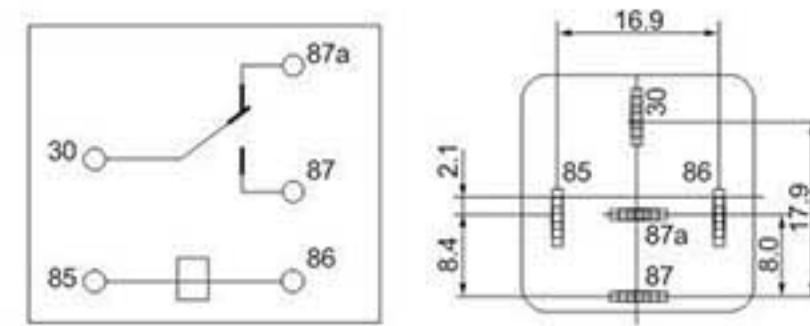

**WNR101-37**




**技术参数 Technical Specifications**

触点形式 Contact Form	1A/1C
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	40A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	22 × 15 × 25.5

**适用车型 Application**

通用; 4插&5插 Universal; 4 Pin & 5 Pin

**接线图 Wiring Diagram & External Dimension**

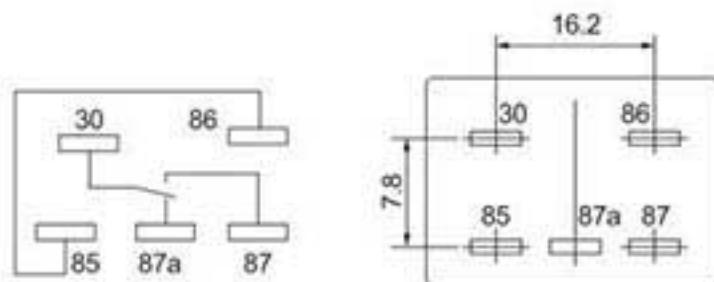

**WNR101-39**




**技术参数 Technical Specifications**

触点形式 Contact Form	1A/1C/1U/1W
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	20A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	PCB
外形尺寸 External Dimension(mm)	17 × 15 × 20

**适用车型 Application**

通用; 4117; 4插&5插 Universal; 4117; 4 Pin & 5 Pin

**接线图 Wiring Diagram & External Dimension**

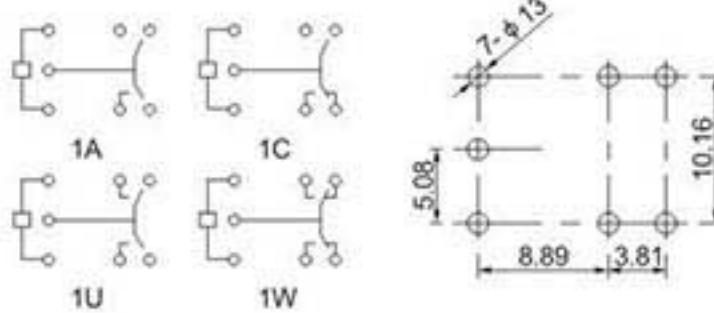

**WNR101-41**




**技术参数 Technical Specifications**

触点形式 Contact Form	1A
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	25A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	Φ 30 × 50

**适用车型 Application**

丰田 Toyota

**接线图 Wiring Diagram & External Dimension**

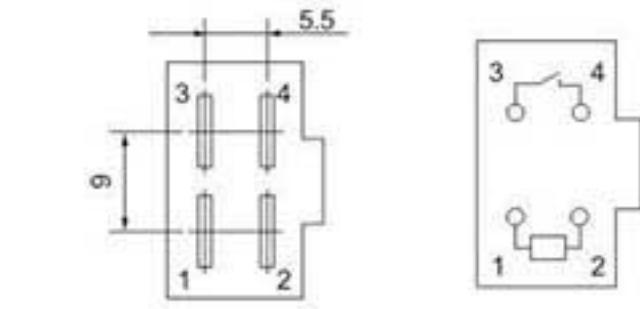

**WNR101-38**




**技术参数 Technical Specifications**

触点形式 Contact Form	1A/1C
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	40A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	22 × 15 × 25.5

**适用车型 Application**

通用; 4插&5插 Universal; 4 Pin & 5 Pin

**接线图 Wiring Diagram & External Dimension**

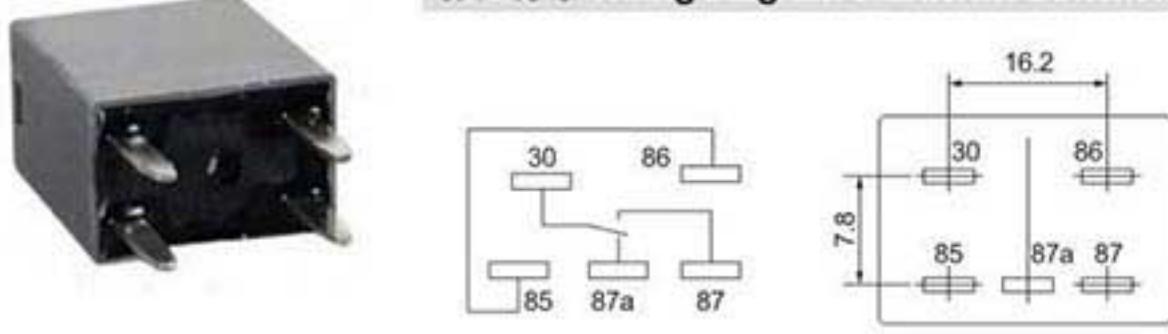

**WNR101-40**




**技术参数 Technical Specifications**

触点形式 Contact Form	1A
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	25A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.8W
电器寿命 Electrical Life	10万次 10 <sup>5</sup> times 10 Thousand times 10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	Φ 30 × 50

**适用车型 Application**

丰田 Toyota

**接线图 Wiring Diagram & External Dimension**

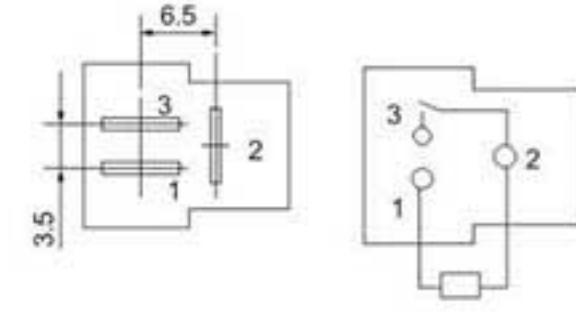

**WNR101-42**




**技术参数 Technical Specifications**

触点形式 Contact Form	1A
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	25A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	Φ 30 × 50

**适用车型 Application**

丰田 Toyota

**接线图 Wiring Diagram & External Dimension**

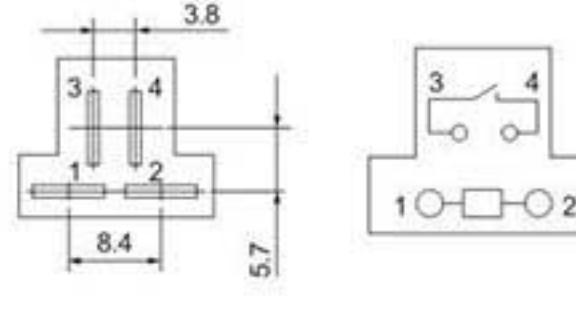

**WNR101-43**




**技术参数 Technical Specifications**

触点形式	Contact Form	1A/1C
触点材料	Contact Material	银合金 Silver Alloy
额定电流	Rated Switching Current	40A
线圈电压	Coil Voltage	12V、24V
线圈功耗	Coil Power Consumption	1.8W
电器寿命	Electrical Life	10 <sup>5</sup> times
引出端形式	Terminal Shape	Quick Connection
外形尺寸	External Dimension(mm)	32.5 × 26.5 × 46.5

**适用车型 Application**

丰田、金杯、现代、瑞风  
Toyota, Jinbei, Hyundai, Refine

**接线图 Wiring Diagram & External Dimension**

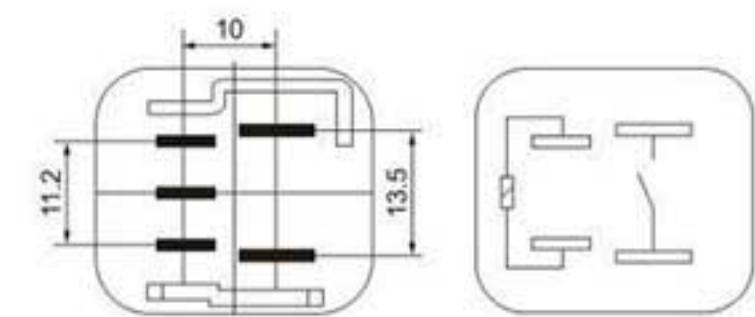

**WNR101-44**




**技术参数 Technical Specifications**

触点形式	Contact Form	1A/1C
触点材料	Contact Material	银合金 Silver Alloy
额定电流	Rated Switching Current	40A
线圈电压	Coil Voltage	12V、24V
线圈功耗	Coil Power Consumption	1.8W
电器寿命	Electrical Life	10 <sup>5</sup> times
引出端形式	Terminal Shape	Quick Connection
外形尺寸	External Dimension(mm)	32.5 × 26.5 × 46.5

**适用车型 Application**

丰田、金杯、现代、瑞风  
Toyota, Jinbei, Hyundai, Refine

**接线图 Wiring Diagram & External Dimension**

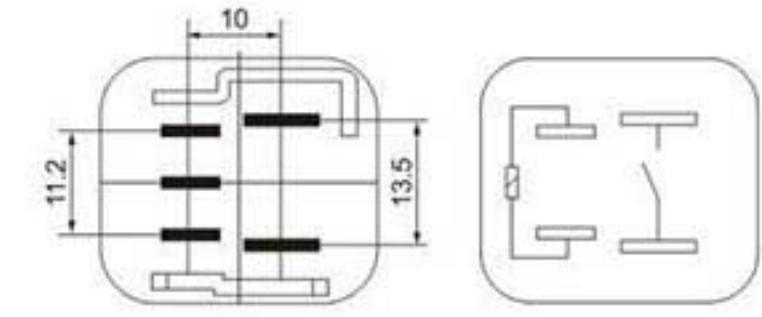

**WNR101-45**




**技术参数 Technical Specifications**

触点形式	Contact Form	1A/1C
触点材料	Contact Material	银合金 Silver Alloy
额定电流	Rated Switching Current	40A
线圈电压	Coil Voltage	12V、24V
线圈功耗	Coil Power Consumption	1.8W
电器寿命	Electrical Life	10 <sup>5</sup> times
引出端形式	Terminal Shape	Quick Connection
外形尺寸	External Dimension(mm)	32.5 × 26.5 × 46.5

**适用车型 Application**

丰田、金杯、现代、瑞风  
Toyota, Jinbei, Hyundai, Refine

**接线图 Wiring Diagram & External Dimension**

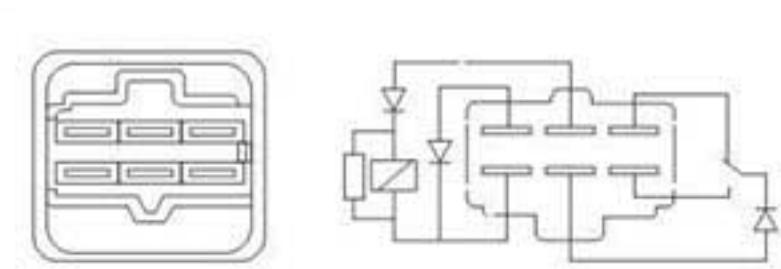

**WNR101-46**




**技术参数 Technical Specifications**

触点形式	Contact Form	1A/1C
触点材料	Contact Material	银合金 Silver Alloy
额定电流	Rated Switching Current	40A
线圈电压	Coil Voltage	12V、24V
线圈功耗	Coil Power Consumption	1.8W
电器寿命	Electrical Life	10 <sup>5</sup> times
引出端形式	Terminal Shape	Quick Connection
外形尺寸	External Dimension(mm)	34 × 28 × 35

**适用车型 Application**

丰田、金杯、现代、瑞风  
Toyota, Jinbei, Hyundai, Refine

**接线图 Wiring Diagram & External Dimension**

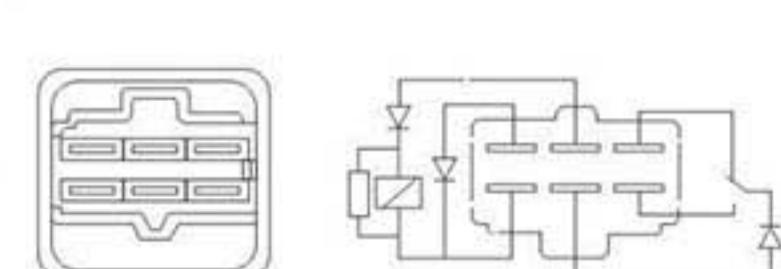

**WNR101-47**




**技术参数 Technical Specifications**

触点形式	Contact Form	1A
触点材料	Contact Material	银合金 Silver Alloy
额定电流	Rated Switching Current	40A
线圈电压	Coil Voltage	12V、24V
线圈功耗	Coil Power Consumption	1.8W
电器寿命	Electrical Life	10 <sup>5</sup> times
引出端形式	Terminal Shape	Quick Connection
外形尺寸	External Dimension(mm)	30 × 27 × 46

**适用车型 Application**

五十铃 Isuzu light, Small light

**接线图 Wiring Diagram & External Dimension**

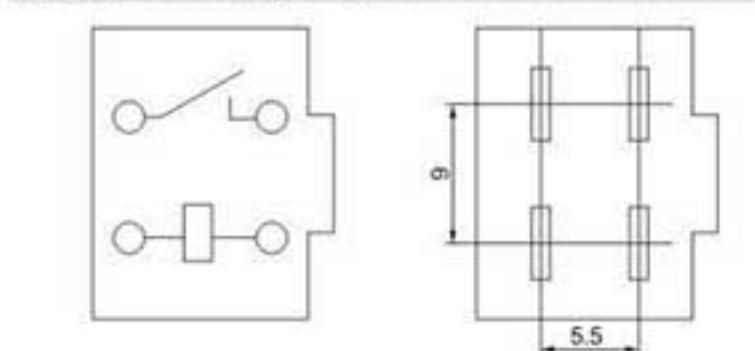

**WNR101-48**




**技术参数 Technical Specifications**

触点形式	Contact Form	1C
触点材料	Contact Material	银合金 Silver Alloy
额定电流	Rated Switching Current	40A
线圈电压	Coil Voltage	12V、24V
线圈功耗	Coil Power Consumption	1.8W
电器寿命	Electrical Life	10 <sup>5</sup> times
引出端形式	Terminal Shape	Quick Connection
外形尺寸	External Dimension(mm)	30 × 27 × 46

**适用车型 Application**

五十铃 Isuzu changing light, Rechargeable

**接线图 Wiring Diagram & External Dimension**

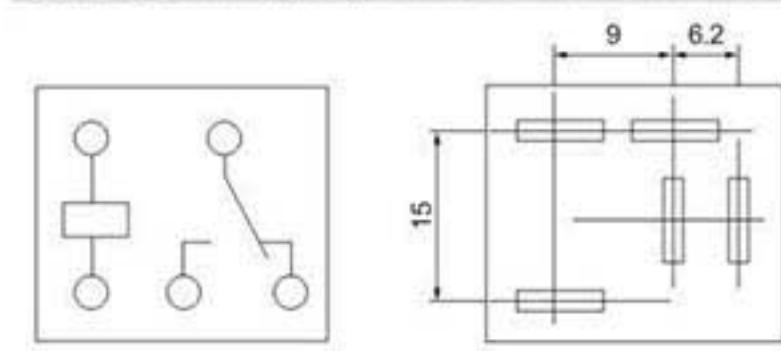

**WNR101-49**





**技术参数 Technical Specifications**

触点形式 Contact Form	1A
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	60A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	4.2W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	40 × 35 × 54

**适用车型 Application**

五十铃 Isuzu preheating

**接线图 Wiring Diagram & External Dimension**



**WNR101-50**





**技术参数 Technical Specifications**

触点形式 Contact Form	1A
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	60A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	4.2W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	40 × 35 × 54

**适用车型 Application**

五十铃 Isuzu starter

**接线图 Wiring Diagram & External Dimension**



**WNR101-51**




**技术参数 Technical Specifications**

触点形式 Contact Form	1U
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	40A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	2.1W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	50 × 25 × 60

**适用车型 Application**

标致 Peugeot

**接线图 Wiring Diagram & External Dimension**

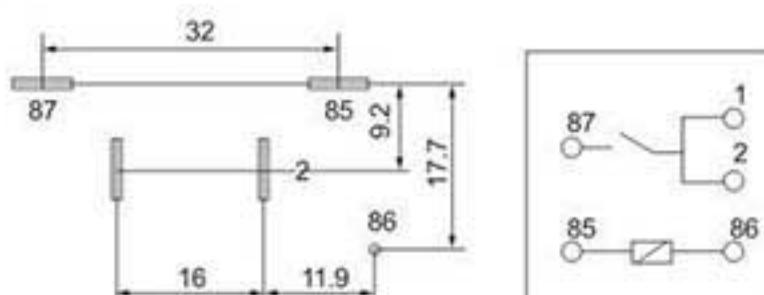

**WNR101-52**





**技术参数 Technical Specifications**

触点形式 Contact Form	1A
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	30A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	50 × 25 × 60

**适用车型 Application**

通用 Universal; Horn

**接线图 Wiring Diagram & External Dimension**



**WNR101-53**



**技术参数 Technical Specifications**

触点形式 Contact Form	1A
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	30A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	50 × 30 × 60

**适用车型 Application**

通用 Universal; Horn

**接线图 Wiring Diagram & External Dimension**



**WNR101-54**




**技术参数 Technical Specifications**

触点形式 Contact Form	1A
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	30A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	50 × 30 × 60

**适用车型 Application**

通用 Universal; Starting

**接线图 Wiring Diagram & External Dimension**



**WNR101-55**




**技术参数 Technical Specifications**

触点形式 Contact Form	1A/1C
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	15A
线圈电压 Coil Voltage	3~48V
线圈功耗 Coil Power Consumption	0.36W、0.45W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	PCB
外形尺寸 External Dimension(mm)	19.5 × 16.5 × 15.5

**适用车型 Application**

T73

**接线图 Wiring Diagram & External Dimension**

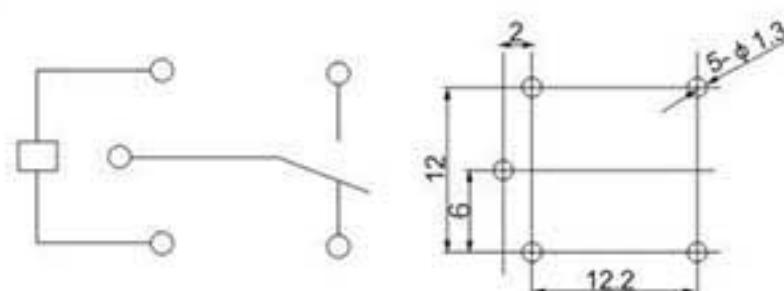

**WNR101-56**




**技术参数 Technical Specifications**

触点形式 Contact Form	1A/1C
触点材料 Contact Material	银合金 Silver Alloy
额定电流 Rated Switching Current	20A
线圈电压 Coil Voltage	6~24V
线圈功耗 Coil Power Consumption	0.6W、0.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	PCB
外形尺寸 External Dimension(mm)	15.8 × 12.6 × 14

**适用车型 Application**

T78

**接线图 Wiring Diagram & External Dimension**

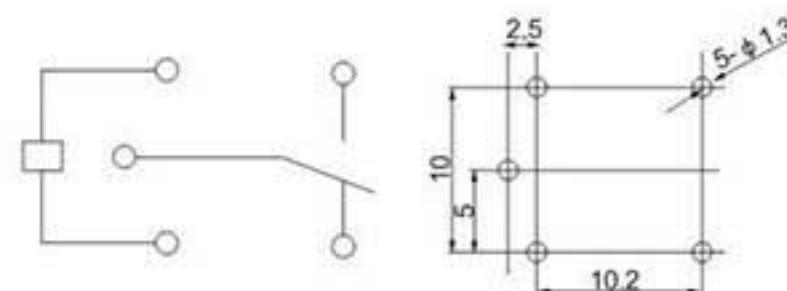

**WNR101-57**




**技术参数 Technical Specifications**

触点形式 Contact Form	
触点材料 Contact Material	
额定电流 Rated Switching Current	20A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	30.3 × 28.5 × 44

**适用车型 Application**

通用；3插 Universal; 3Pin

**接线图 Wiring Diagram & External Dimension**

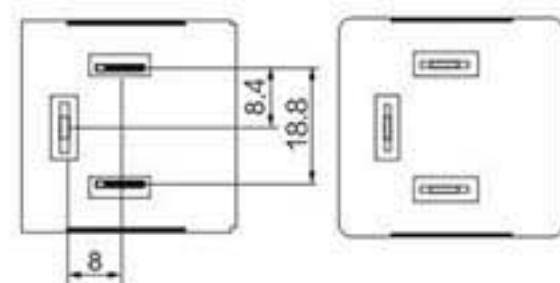

**WNR101-58**




**技术参数 Technical Specifications**

触点形式 Contact Form	
触点材料 Contact Material	
额定电流 Rated Switching Current	20A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	30 × 30 × 30

**适用车型 Application**

通用；3插 Universal; 3Pin

**接线图 Wiring Diagram & External Dimension**

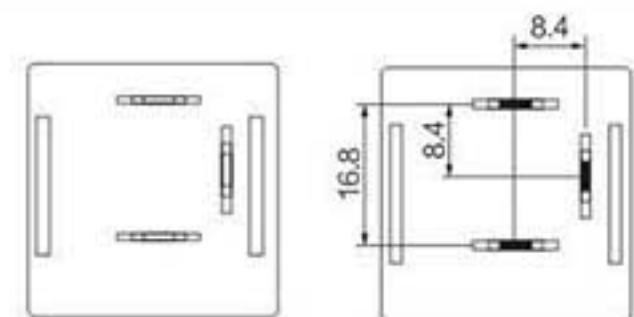

**WNR101-59**




**技术参数 Technical Specifications**

触点形式 Contact Form	
触点材料 Contact Material	
额定电流 Rated Switching Current	20A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	30 × 30 × 30

**适用车型 Application**

通用；5插 Universal; 5Pin

**接线图 Wiring Diagram & External Dimension**

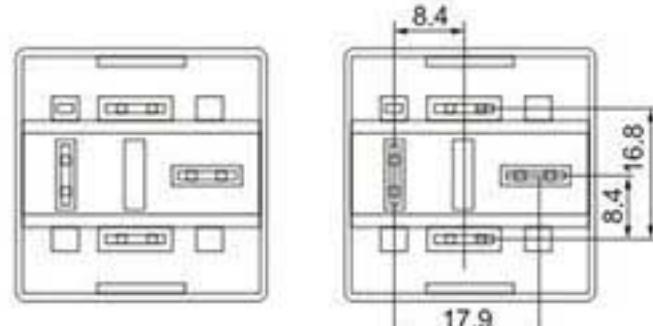

**WNR101-60**




**技术参数 Technical Specifications**

触点形式 Contact Form	
触点材料 Contact Material	
额定电流 Rated Switching Current	20A
线圈电压 Coil Voltage	12V、24V
线圈功耗 Coil Power Consumption	1.8W
电器寿命 Electrical Life	10 <sup>5</sup> times
引出端形式 Terminal Shape	Quick Connection
外形尺寸 External Dimension(mm)	φ 34 × 38

**适用车型 Application**

通用；5插 Universal; 5Pin

**接线图 Wiring Diagram & External Dimension**

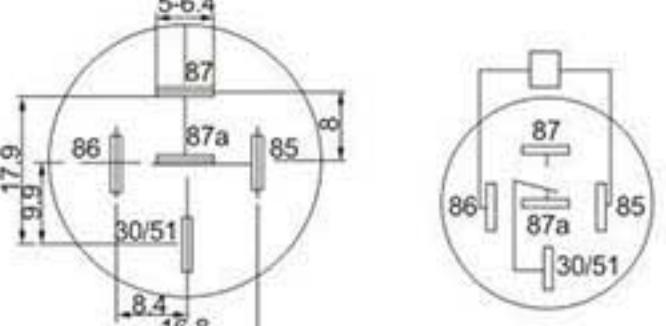

**WNR101-61**



5 Pin Relay Socket

**WNR101-62**




5 Pin Relay Socket

**WNR101-63**



5 Pin Relay Socket

**WNR101-64**

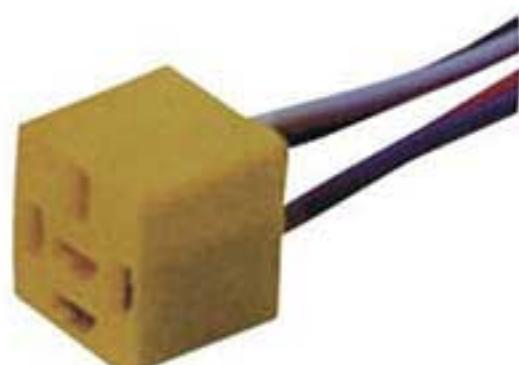


5 Pin Relay Socket

**WNR101-65**



5 Pin Relay, Ceramic

**WNR101-66**

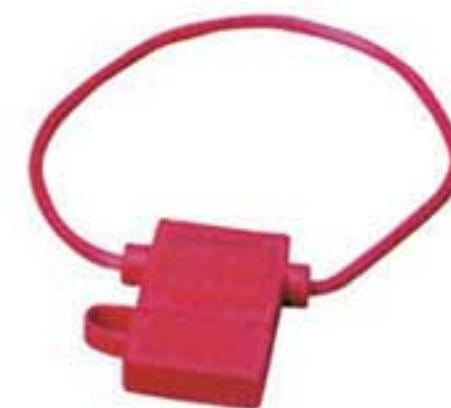

Fuse Holder for Plug-In fuse

**WNR101-67**



H4 Bulb Socket, ceramic

**WNR101-68**



H4 Bulb Socket, ceramic

**WNR101-69**



9004 Bulb Socket, ceramic

**WNR101-70**



9006 Bulb Socket, ceramic

**WNR101-71**



9005 Bulb Socket, ceramic

**WNR101-72**



H11 Bulb Socket, ceramic

**WNR101-73**



Jumper harness

**WNR101-74**



Jumper harness

**WNR101-75**



license plate & instrument panel  
universal single contact  
snap-in socket assembly fits 1-1/8"  
hole, lamp nos: 63.67.81, 87.93.209.1003.1073.  
1129.1133.1141.

**WNR101-76**



For GM signal/park/stop & tail  
flush-mounting snap-in double contact  
GM 5947900 lamp nos: 198.1016  
1034.1154.1157.  
Fit d1-1/8" hole

**WNR101-77**



H8/H11 Bulb Socket

**WNR101-78**




9006 Bulb Socket, plastic

**WNR101-79**




9005 Bulb Socket, plastic

**WNR101-80**

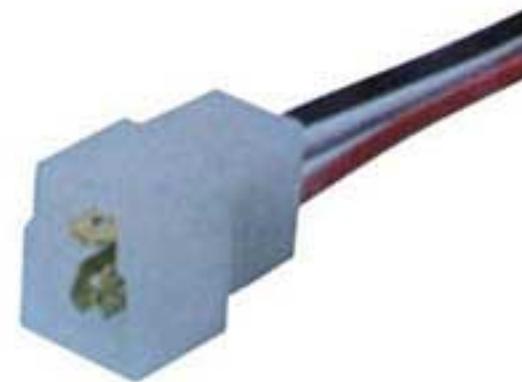

3.PIN MALE  
250 TYPE

**WNR101-81**

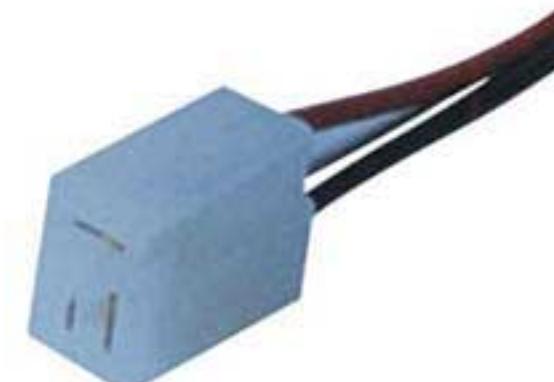

3.PIN FEMALE  
250 TYPE

**WNR101-82**



4.PIN MALE  
250 TYPE

**WNR101-83**



4.PIN FEMALE  
250 TYPE

**WNR101-84**



6.PIN MALE  
250 TYPE