

产品介绍 product description




504





505

基于选用高规格的冷轧钢板,经由先进的模具、压铸、机加、装配、电镀等工艺流程,使产品表面平整光洁、结构紧固;
A型柜门铰链,无需开铰杯孔,为柜门提供更好的解决方案,易于安装,便于应用;使柜门轻柔无声闭合,更好保护门板;

底座安装孔位与盖位表 Installation hole location

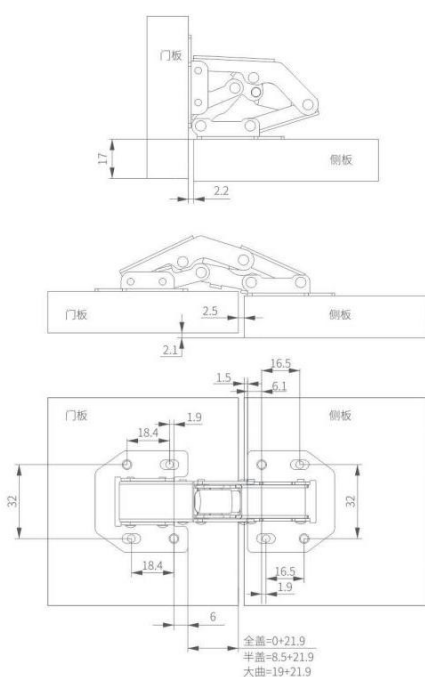

安装小盖位(反)

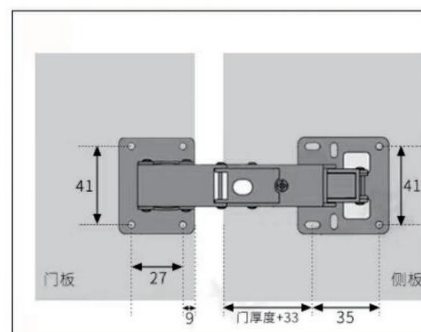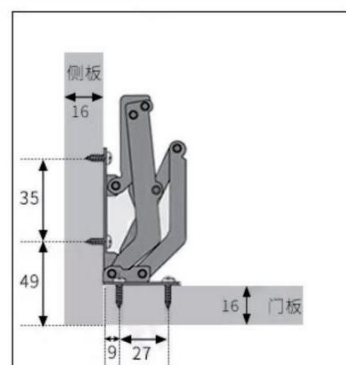

YD-504/505 桥型铰链

Bridge hinge



固定式 A型铰链
A型柜门铰链,无需开铰杯孔
适用于15-20mm厚度的门板
覆盖距离调节:±2mm
铰链油缸:锻打油缸
铰链材质:冷轧钢板、电镀

Fixed type A hinge
A-type cabinet door hinge,
no need to open the hinge cup hole
Suitable for door panels with a thickness of 15-20mm
Covering distance adjustment: ±2mm
Hinge cylinder: forging cylinder
Hinge material: cold rolled steel plate, nickel plated



505