

# PLAYLAWN series

PLAYLITE®  
www.pyledlight.com

## Application

They are ideal for applications such as in hotels, houses, gardens, parks for the illumination of lawn, trees.




Lawn light with 360° beam angle.  
Flat top or mushroom top as options.  
With a round base for hard ground or wooden mounting,  
also with spike for lawn mounting.  
ideal for illumination for lawn or small plants in the garden.

CE IK04 IP65

3 years warranty as standard, 5 years as options

Passivated + powder coated paint

Only 60mm diameter with 360° beam

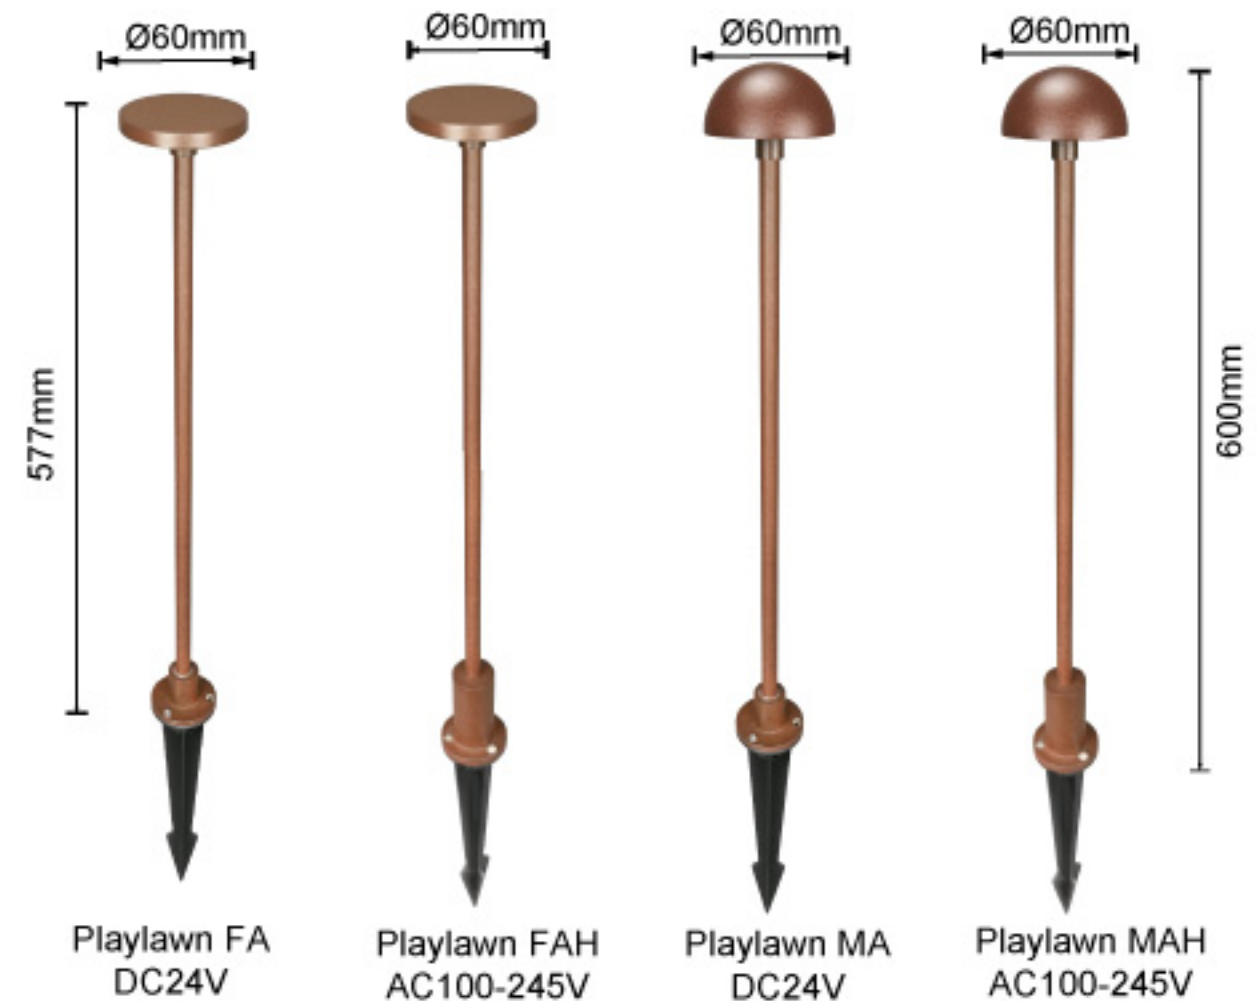



With round base for hard ground or wooden mounting



IP65 waterproof





With spike for lawn mounting





PLAYLITE® **PLAYLAWN FA /PLAYLAWN FAH**

PLAYLITE® **PLAYLAWN MA/PLAYLAWN MAH**

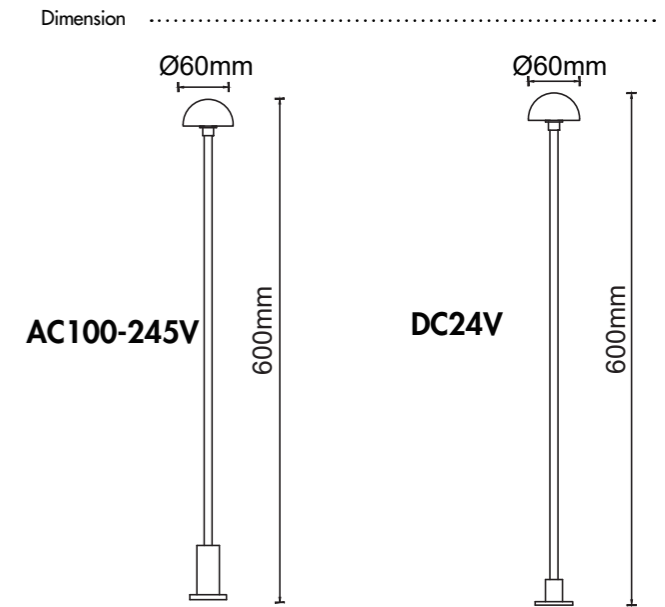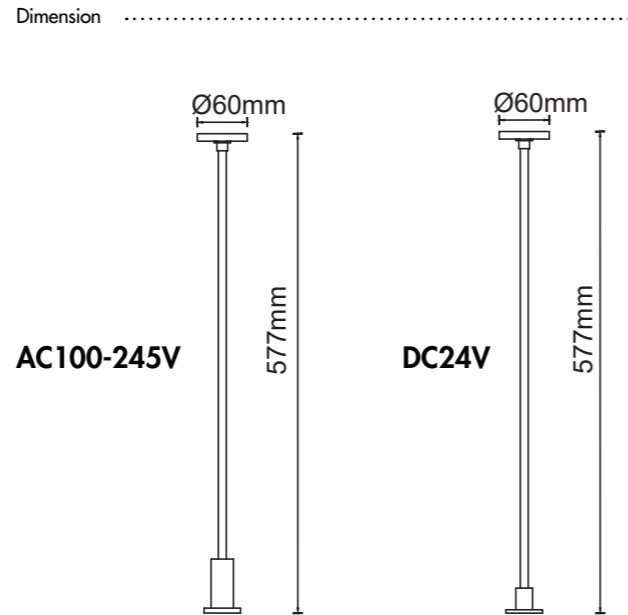

**CE IP65 IK04**

3 Years Warranty as standard, 5 Years as options

Only 60mm diameter with 360° beam


Parameter .....

| General Data         |   |
|----------------------|---|
| Item No.             | DC24V: LL-1801-0300-A, AC10-245V: LL-1801-0300-AH       |
| Power                | 3 watts +10%  |
| LED type             | OSRAM 2835 SMD LED                                      |
| Luminous flux        | 90 lm+10%   |
| CCT                  | 2700K/3000K/4000K/5700K/6500K                           |
| CRI                  | 80+   |
| Beam angle           | 75°   |
| Dimension            | Φ60 x 577 (mm) Diameter x Height                        |
| Cut out              | /   |
| Net weight           | 0.3 kgs   |
| Warranty             | 3 years as standard, 5 years as options                 |
| Certifications       | CE  |
| Electrical Data      |   |
| Input voltage        | AC100-245V or DC24V                                     |
| Insulation class     | Class I or III  |
| Cable                | 1PC 1M 2 *0.35mm2 PVC cable                             |
| Driver               | constant current driver DC24V input or AC100-245V       |
| Construction Data    |   |
| IP rating            | IP65 Waterproof   |
| IK rating            | IK04  |
| Housing              | Aluminium   |
| Protection finishing | Passivated +powder coated painted in cafe silver colour |
| Trim                 | Tempered glass with black silkscreen                    |
| Loading capacity     | / kgs   |
| Cable Gland          | Aluminium   |
| Gasket               | Silicone gasket   |
| Accessories          |   |
| Spike                | Aluminium 205mm height spike as options                 |
| Packaging            |   |
| Inner box size       | 65*780 mm (Diameter x length)                           |
| Carton size          | 80*40*33 cm ( 20 PCS/CTN)                               |

Passivated+ painted available colour for housing:



Illumination Picture ( 100° ) .....

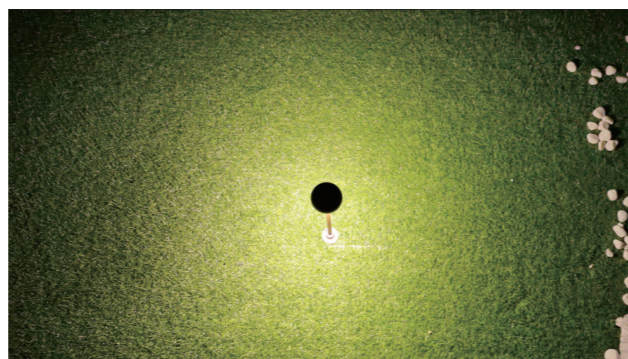

**CE IP65 IK04**

3 Years Warranty as standard, 5 Years as options

Only 60mm diameter with 360° beam

Parameter .....

| General Data         |   |
|----------------------|---|
| Item No.             | DC24V: LL-1801-0300-A-M, AC10-245V: LL-1801-0300-AH-M   |
| Power                | 3 watts +10%  |
| LED type             | OSRAM 2835 SMD LED                                      |
| Luminous flux        | 90 lm+10%   |
| CCT                  | 2700K/3000K/4000K/5700K/6500K                           |
| CRI                  | 80+   |
| Beam angle           | 75°   |
| Dimension            | Φ60 x 600 (mm) Diameter x Height                        |
| Cut out              | /   |
| Net weight           | 0.4 kgs   |
| Warranty             | 3 years as standard, 5 years as options                 |
| Certifications       | CE  |
| Electrical Data      |   |
| Input voltage        | AC100-245V or DC24V                                     |
| Insulation class     | Class I or III  |
| Cable                | 1PC 1M 2 *0.35mm2 PVC cable                             |
| Driver               | constant current driver DC24V input or AC100-245V       |
| Construction Data    |   |
| IP rating            | IP65 Waterproof   |
| IK rating            | IK04  |
| Housing              | Aluminium   |
| Protection finishing | Passivated +powder coated painted in cafe silver colour |
| Trim                 | Tempered glass in black silkscreen                      |
| Loading capacity     | / kgs   |
| Cable Gland          | Aluminium   |
| Gasket               | Silicone gasket   |
| Accessories          |   |
| Spike                | Aluminium 205mm height spike as options                 |
| Packaging            |   |
| Inner box size       | 65*780 mm (Diameter x length)                           |
| Carton size          | 80*40*33 cm ( 20 PCS/CTN)                               |

Passivated+ painted available colour for housing:



Illumination Picture ( 100° ) .....

