



Indoor Luminaire Photometric Data

Description Information

Luminary Name: 55252		Lum. Catelog:	Test ID:
Lamp Name:		Lamp Catelog:	Test Date: 2024/04/25
Manufacture:		Shld.Ang(°):	Test Machine:GON-2000
Test Lab:		Frequency(Hz):	Lamp CCT(K): 3000 Ra:
Lum. Size(W*L*H):0.050m*~0.050m*0.000m		Lum. Area(m2):0.002	Lum. W(kg): 0.000
Test System: C, γ	Test Step: C=30.0 γ=1.0	Temp.(℃): 25	Humidity(%): 50.0


Character Parameter

Lamp Speciality Parameter	Luminaire Speciality Parameter	
Rated Flux(lm): 495.910	Luminary Flux(lm): 495.906	Field Angle(10%Imax): 30.3(°)
Rated Power(W): 10	Luminary Efficiency: 100.00%	Down Lumens&Percent: 495.885lm 100.00%
Rated Voltage(V): 220	Luminary EER(lm/W): 51.641	Up Lumens&Percent: 0.022lm 0.00%
Tested Power(W): 9.603	Max. Candela(cd): 5734.143	S/MH: C0_a180=0.398 C90_270=0.308
Lamps' Inside: 1	Max Cand@Ang. (°): C=150.0 γ=4.0	CIE Type: Semi-Direct
Tested Electrics(V, A, pf): 230.4, 0.044, 0.942	Beam Angle (50%Imax): 10.9(°)	ErP Φ use(90°): 522.248lm
Lamp Size(W*L*H): 0.050m*0.050m*0.000m	Left=-1.5°, Right=9.4°	IRF(%): 2140.952

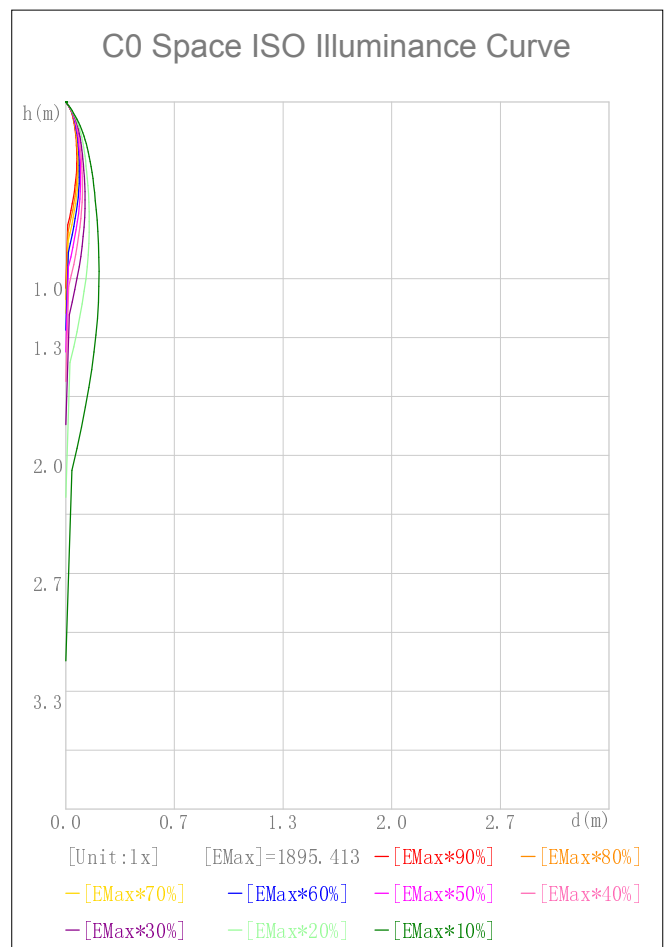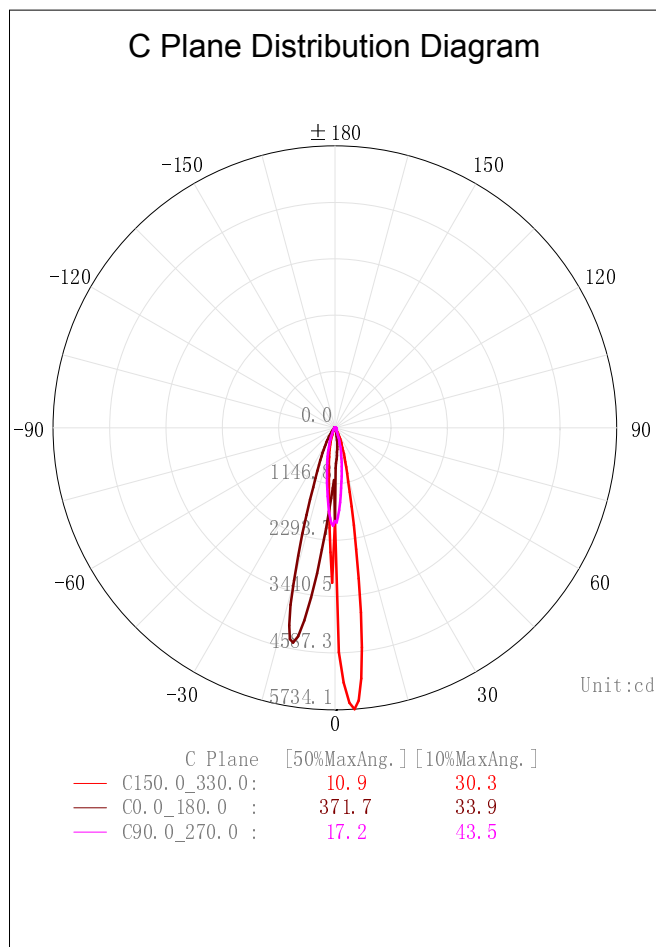

2D Plane Light Intensity Distribution Curve


Lum. Name: 55252	Lum. Catalog:	Test ID:
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2024/04/25

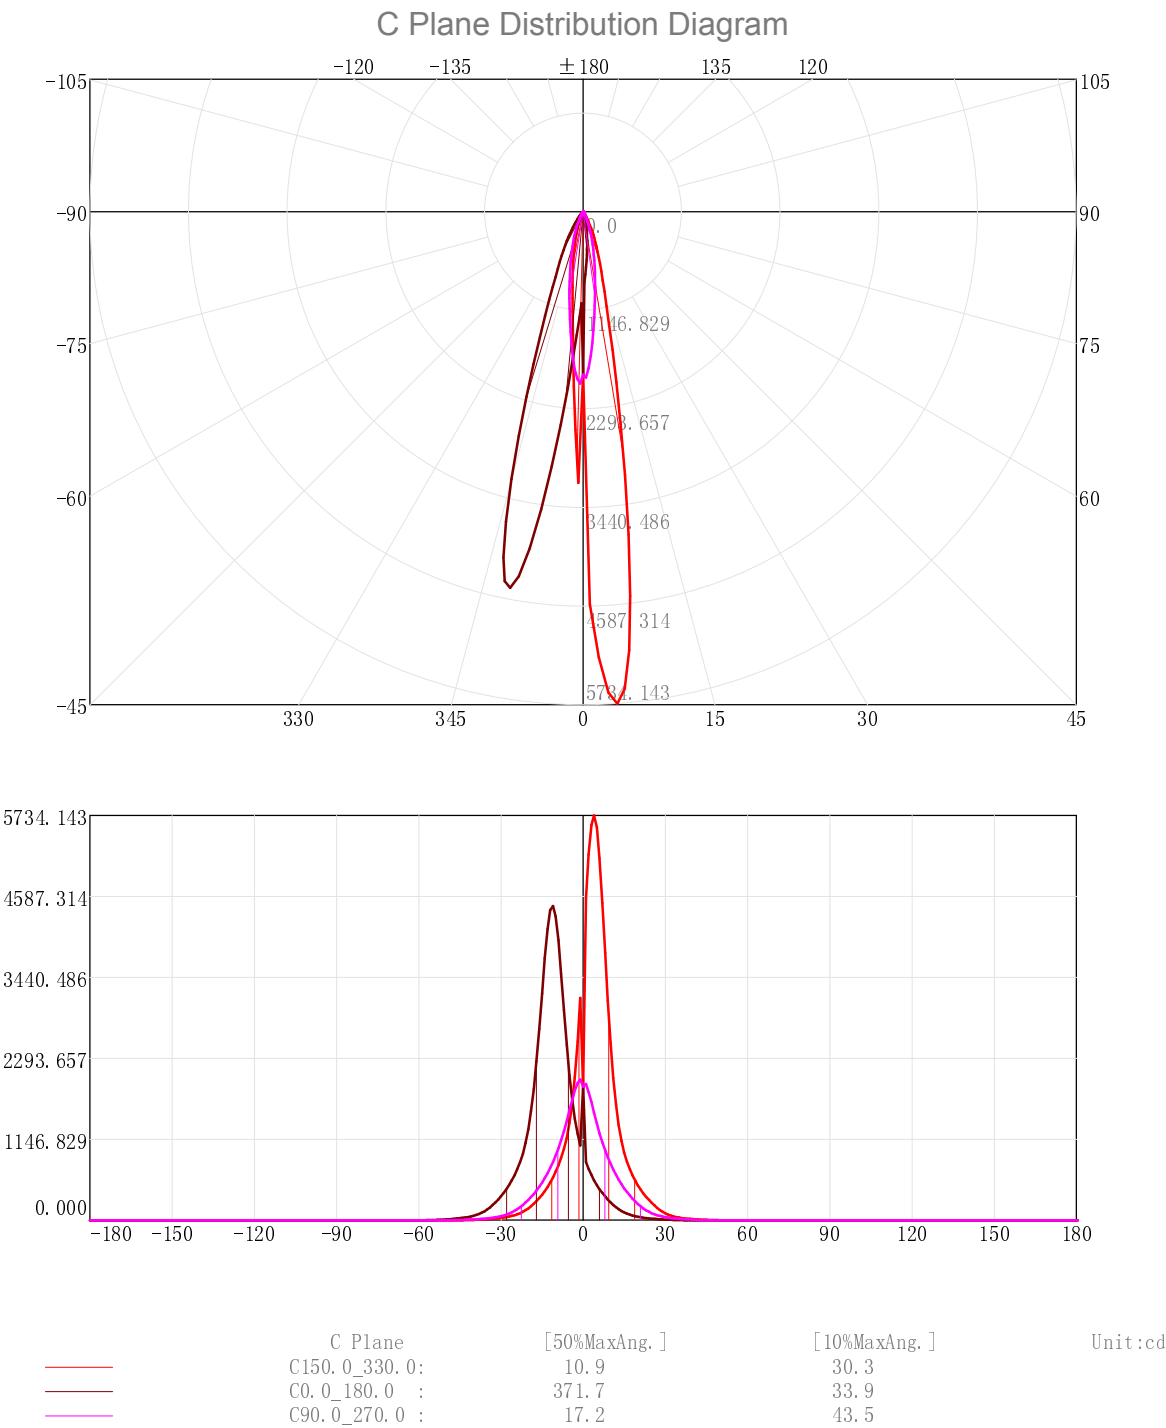

3D Light Intensity Distribution Modal

Lum. Name:55252	Lum. Catelog:	Test ID:
Lamp Name:	Lamp Catelog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2024/04/25

3D Light Intensity Distribution Modal

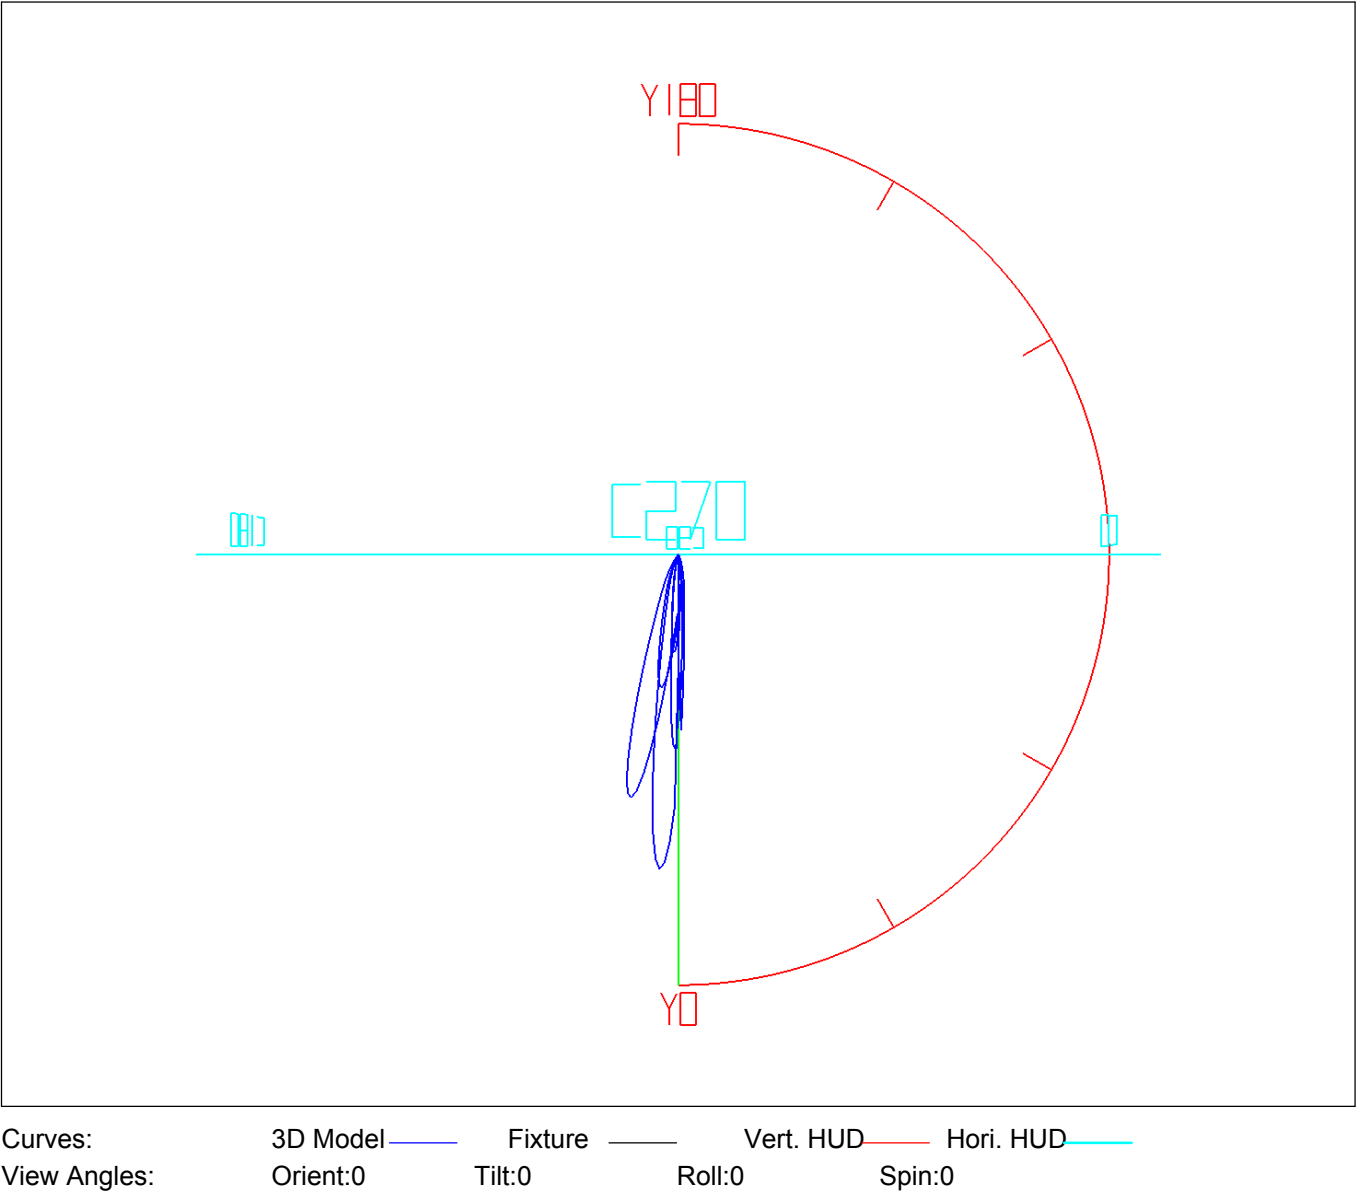

Photometric Filename:FL-8001-1000-IH-15度透镜带防眩罩-黑.IES

Zone(γ)	Zone Flux (1m)	Sums Flux (1m)	Zone%Lamp	Sums%Lamp	Zone(γ)	Zone Flux (1m)	Sums Flux (1m)	Zone%Lamp	Sums%Lamp
0.0-1.0	1.89	1.89	0.38	0.38	47.0-48.0	0.35	494.66	0.07	99.75
1.0-2.0	5.85	7.73	1.18	1.56	48.0-49.0	0.28	494.94	0.06	99.80
2.0-3.0	9.58	17.32	1.93	3.49	49.0-50.0	0.23	495.17	0.05	99.85
3.0-4.0	13.06	30.38	2.63	6.13	50.0-51.0	0.19	495.36	0.04	99.89
4.0-5.0	16.17	46.55	3.26	9.39	51.0-52.0	0.15	495.50	0.03	99.92
5.0-6.0	18.85	65.40	3.80	13.19	52.0-53.0	0.11	495.62	0.02	99.94
6.0-7.0	21.06	86.46	4.25	17.43	53.0-54.0	0.09	495.70	0.02	99.96
7.0-8.0	22.83	109.29	4.60	22.04	54.0-55.0	0.06	495.77	0.01	99.97
8.0-9.0	24.20	133.49	4.88	26.92	55.0-56.0	0.05	495.82	0.01	99.98
9.0-10.0	25.17	158.66	5.08	31.99	56.0-57.0	0.03	495.85	0.01	99.99
10.0-11.0	25.71	184.37	5.18	37.18	57.0-58.0	0.02	495.87	0.00	99.99
11.0-12.0	25.75	210.12	5.19	42.37	58.0-59.0	0.01	495.88	0.00	99.99
12.0-13.0	25.29	235.41	5.10	47.47	59.0-60.0	0.00	495.88	0.00	99.99
13.0-14.0	24.32	259.73	4.90	52.37	60.0-61.0	0.00	495.88	0.00	99.99
14.0-15.0	22.95	282.69	4.63	57.00	61.0-62.0	0.00	495.88	0.00	99.99
15.0-16.0	21.33	304.02	4.30	61.31	62.0-63.0	0.00	495.88	0.00	99.99
16.0-17.0	19.61	323.63	3.96	65.26	63.0-64.0	0.00	495.88	0.00	99.99
17.0-18.0	17.93	341.56	3.61	68.88	64.0-65.0	0.00	495.88	0.00	99.99
18.0-19.0	16.34	357.90	3.29	72.17	65.0-66.0	0.00	495.88	0.00	99.99
19.0-20.0	14.86	372.76	3.00	75.17	66.0-67.0	0.00	495.88	0.00	99.99
20.0-21.0	13.51	386.26	2.72	77.89	67.0-68.0	0.00	495.88	0.00	99.99
21.0-22.0	12.27	398.54	2.47	80.36	68.0-69.0	0.00	495.88	0.00	99.99
22.0-23.0	11.15	409.68	2.25	82.61	69.0-70.0	0.00	495.88	0.00	99.99
23.0-24.0	10.11	419.79	2.04	84.65	70.0-71.0	0.00	495.88	0.00	99.99
24.0-25.0	9.15	428.94	1.85	86.50	71.0-72.0	0.00	495.88	0.00	99.99
25.0-26.0	8.25	437.19	1.66	88.16	72.0-73.0	0.00	495.88	0.00	99.99
26.0-27.0	7.40	444.59	1.49	89.65	73.0-74.0	0.00	495.88	0.00	99.99
27.0-28.0	6.60	451.20	1.33	90.98	74.0-75.0	0.00	495.88	0.00	99.99
28.0-29.0	5.87	457.07	1.18	92.17	75.0-76.0	0.00	495.88	0.00	99.99
29.0-30.0	5.21	462.28	1.05	93.22	76.0-77.0	0.00	495.88	0.00	99.99
30.0-31.0	4.60	466.88	0.93	94.15	77.0-78.0	0.00	495.88	0.00	99.99
31.0-32.0	4.05	470.93	0.82	94.96	78.0-79.0	0.00	495.88	0.00	99.99
32.0-33.0	3.54	474.47	0.71	95.68	79.0-80.0	0.00	495.88	0.00	99.99
33.0-34.0	3.08	477.55	0.62	96.30	80.0-81.0	0.00	495.88	0.00	99.99
34.0-35.0	2.68	480.23	0.54	96.84	81.0-82.0	0.00	495.88	0.00	99.99
35.0-36.0	2.32	482.55	0.47	97.31	82.0-83.0	0.00	495.88	0.00	99.99
36.0-37.0	2.01	4							

IES Indoor Report


Photometric Filename:FL-8001-1000-IH-15度透镜带防眩罩-黑.IES

Zonal Flux Tabulation - (Cont.)

Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
94.0-95.0	0.00	495.88	0.00	99.99	141.0-142.0	0.00	495.88	0.00	99.99
95.0-96.0	0.00	495.88	0.00	99.99	142.0-143.0	0.00	495.88	0.00	99.99
96.0-97.0	0.00	495.88	0.00	99.99	143.0-144.0	0.00	495.88	0.00	99.99
97.0-98.0	0.00	495.88	0.00	99.99	144.0-145.0	0.00	495.88	0.00	99.99
98.0-99.0	0.00	495.88	0.00	99.99	145.0-146.0	0.00	495.88	0.00	99.99
99.0-100.0	0.00	495.88	0.00	99.99	146.0-147.0	0.00	495.88	0.00	99.99
100.0-101.0	0.00	495.88	0.00	99.99	147.0-148.0	0.00	495.88	0.00	99.99
101.0-102.0	0.00	495.88	0.00	99.99	148.0-149.0	0.00	495.88	0.00	99.99
102.0-103.0	0.00	495.88	0.00	99.99	149.0-150.0	0.00	495.88	0.00	99.99
103.0-104.0	0.00	495.88	0.00	99.99	150.0-151.0	0.00	495.88	0.00	99.99
104.0-105.0	0.00	495.88	0.00	99.99	151.0-152.0	0.00	495.88	0.00	99.99
105.0-106.0	0.00	495.88	0.00	99.99	152.0-153.0	0.00	495.88	0.00	99.99
106.0-107.0	0.00	495.88	0.00	99.99	153.0-154.0	0.00	495.88	0.00	99.99
107.0-108.0	0.00	495.88	0.00	99.99	154.0-155.0	0.00	495.88	0.00	99.99
108.0-109.0	0.00	495.88	0.00	99.99	155.0-156.0	0.00	495.88	0.00	99.99
109.0-110.0	0.00	495.88	0.00	99.99	156.0-157.0	0.00	495.89	0.00	99.99
110.0-111.0	0.00	495.88	0.00	99.99	157.0-158.0	0.00	495.89	0.00	100.00
111.0-112.0	0.00	495.88	0.00	99.99	158.0-159.0	0.00	495.89	0.00	100.00
112.0-113.0	0.00	495.88	0.00	99.99	159.0-160.0	0.00	495.89	0.00	100.00
113.0-114.0	0.00	495.88	0.00	99.99	160.0-161.0	0.00	495.89	0.00	100.00
114.0-115.0	0.00	495.88	0.00	99.99	161.0-162.0	0.00	495.89	0.00	100.00
115.0-116.0	0.00	495.88	0.00	99.99	162.0-163.0	0.00	495.89	0.00	100.00
116.0-117.0	0.00	495.88	0.00	99.99	163.0-164.0	0.00	495.89	0.00	100.00
117.0-118.0	0.00	495.88	0.00	99.99	164.0-165.0	0.00	495.89	0.00	100.00
118.0-119.0	0.00	495.88	0.00	99.99	165.0-166.0	0.00	495.89	0.00	100.00
119.0-120.0	0.00	495.88	0.00	99.99	166.0-167.0	0.00	495.90	0.00	100.00
120.0-121.0	0.00	495.88	0.00	99.99	167.0-168.0	0.00	495.90	0.00	100.00
121.0-122.0	0.00	495.88	0.00	99.99	168.0-169.0	0.00	495.90	0.00	100.00
122.0-123.0	0.00	495.88	0.00	99.99	169.0-170.0	0.00	495.90	0.00	100.00
123.0-124.0	0.00	495.88	0.00	99.99	170.0-171.0	0.00	495.90	0.00	100.00
124.0-125.0	0.00	495.88	0.00	99.99	171.0-172.0	0.00	495.90	0.00	100.00
125.0-126.0	0.00	495.88	0.00	99.99	172.0-173.0	0.00	495.90	0.00	100.00
126.0-127.0	0.00	495.88	0.00	99.99	173.0-174.0	0.00	495.90	0.00	100.00
127.0-128.0	0.00	495.88	0.00	99.99	174.0-175.0	0.00	495.90	0.00	100.00
128.0-129.0	0.00	495.88	0.00	99.99	175.0-176.0	0.00	495.91	0.00	100.00
129.0-130.0	0.00	495.88	0.00	99.99	176.0-177.0	0.00	495.91	0.00	100.00
130.0-131.0	0.00	495.88	0.00	99.99	177.0-178.0	0.00	495.91	0.00	100.00
131.0-132.0	0.00	495.88	0.00	99.99	178.0-179.0	0.00	495.91	0.00	100.00
132.0-133.0	0.00	495.88	0.00	99.99	179.0-180.0	0.00	495.91	0.00	100.00
133.0-134.0	0.00	495.88	0.00	99.99					
134.0-135.0	0.00	495.88	0.00	99.99					
135.0-136.0	0.00	495.88	0.00	99.99					
136.0-137.0	0.00	495.88	0.00	99.99					
137.0-138.0	0.00	495.88	0.00	99.99					
138.0-139.0	0.00	495.88	0.00	99.99					
139.0-140.0	0.00	495.88	0.00	99.99					
140.0-141.0	0.00	495.88	0.00	99.99					

Rectangle ISO Lighting Intensity Diagram

Lum. Name: 55252	Lum. Catalog:	Test ID:
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2024/04/25

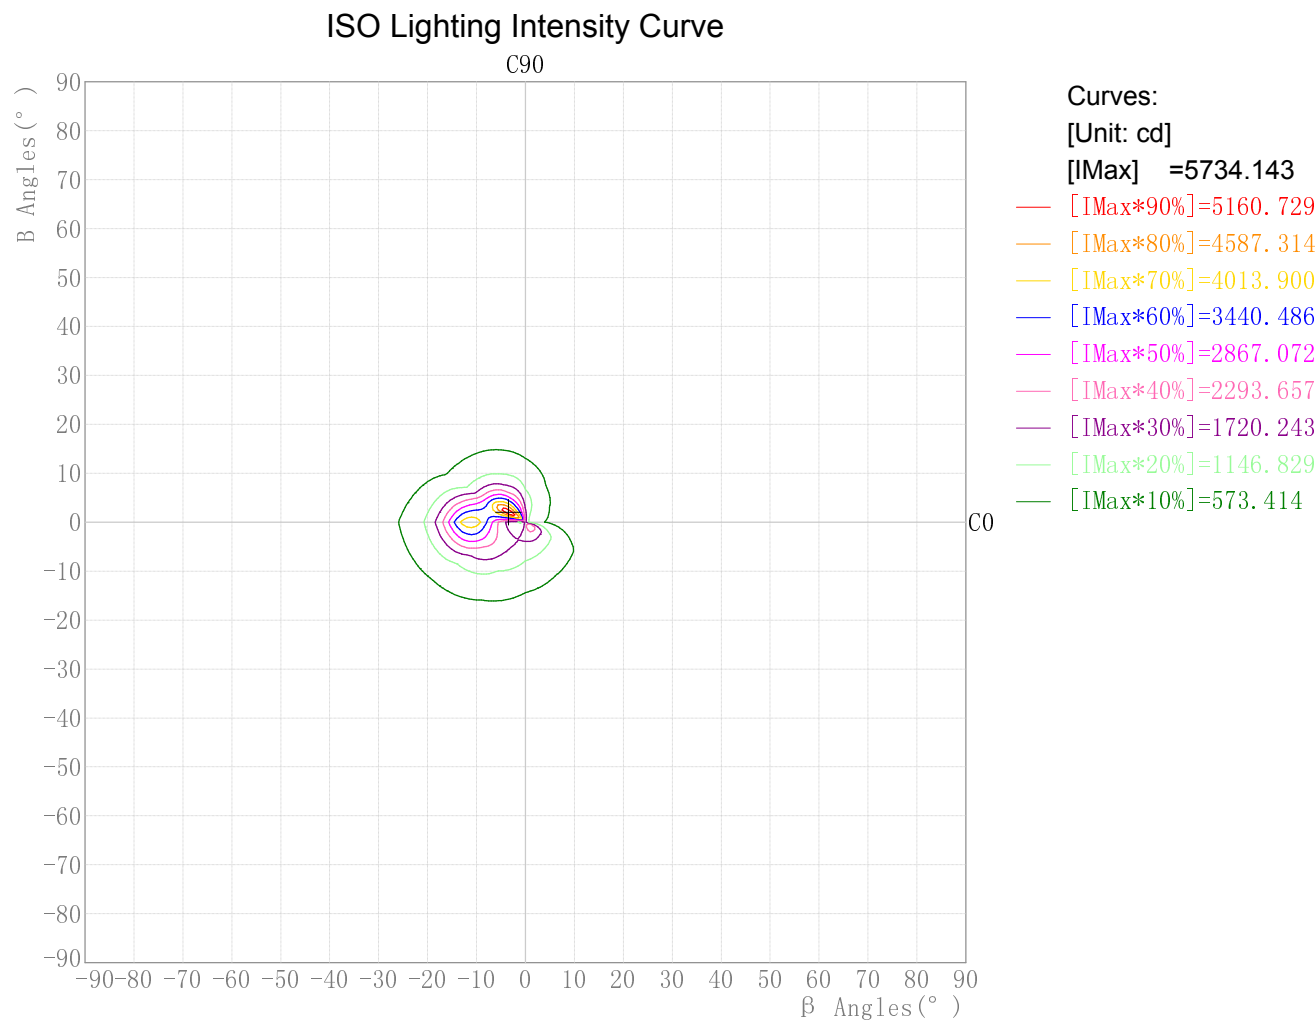


Photometric Filename:FL-8001-1000-IH-15度透镜带防眩罩-黑.IES

Plane ISO-Illuminance Diagram

Lum. Name: 55252	Lum. Catelog:	Test ID:
Lamp Name:	Lamp Catelog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2024/04/25

Plane ISO-Illuminance Curve

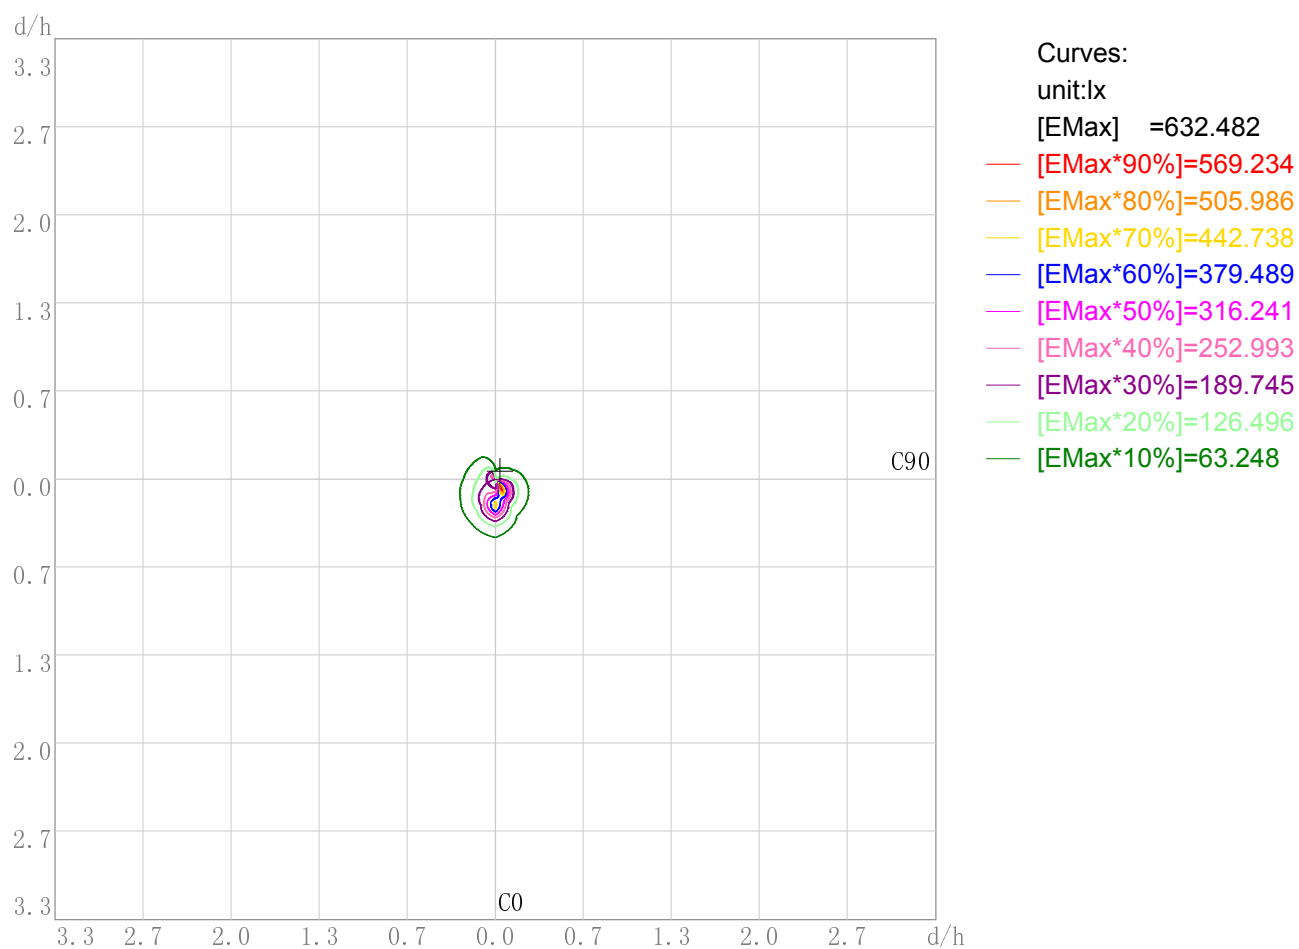

Working Plane Luminaire Mounting Height(m): 3.00

Working Plane Maximum Illuminance(lx): 632.48


Working Plane Maximum Illuminance Position(d/h):H0.0 V-0.1

Photometric Filename:FL-8001-1000-IH-15度透镜带防眩罩-黑.IES

3D Plane ISO Illuminance Diagram

Lum. Name: 55252	Lum. Catelog:	Test ID:
Lamp Name:	Lamp Catelog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2024/04/25


3D Plane Illuminance Modal

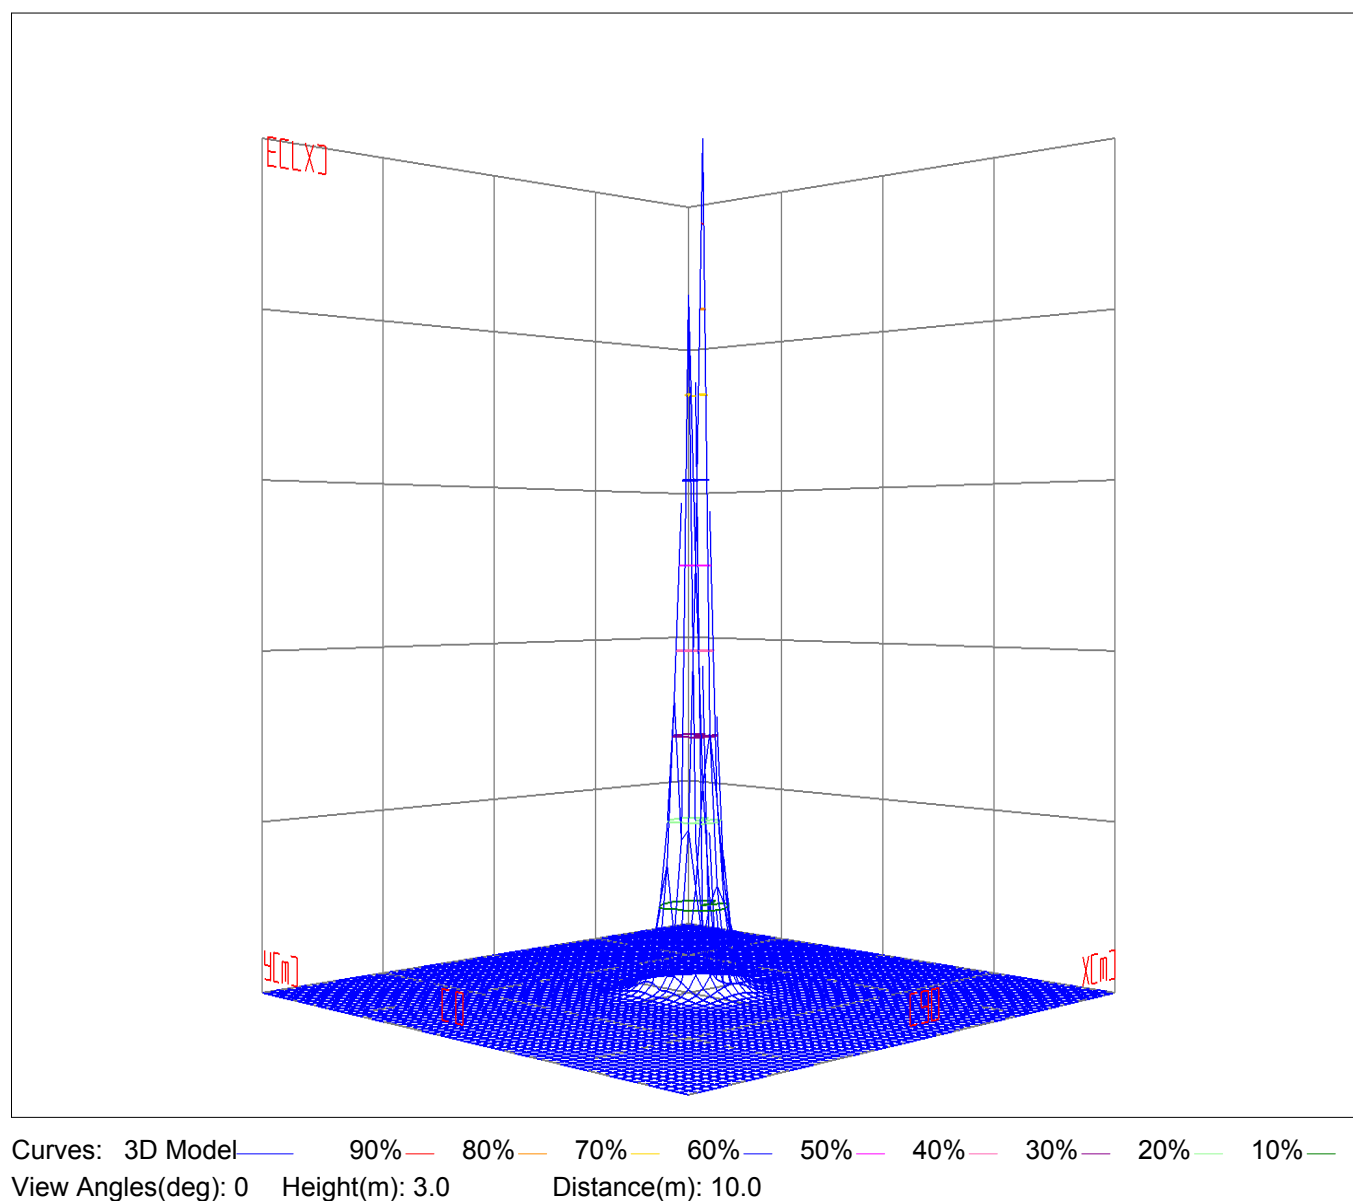

Space ISO Illuminance Diagram

Lum. Name:55252	Lum. Catelog:	Test ID:
Lamp Name:	Lamp Catelog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2024/04/25


Space ISO Illuminance Curve

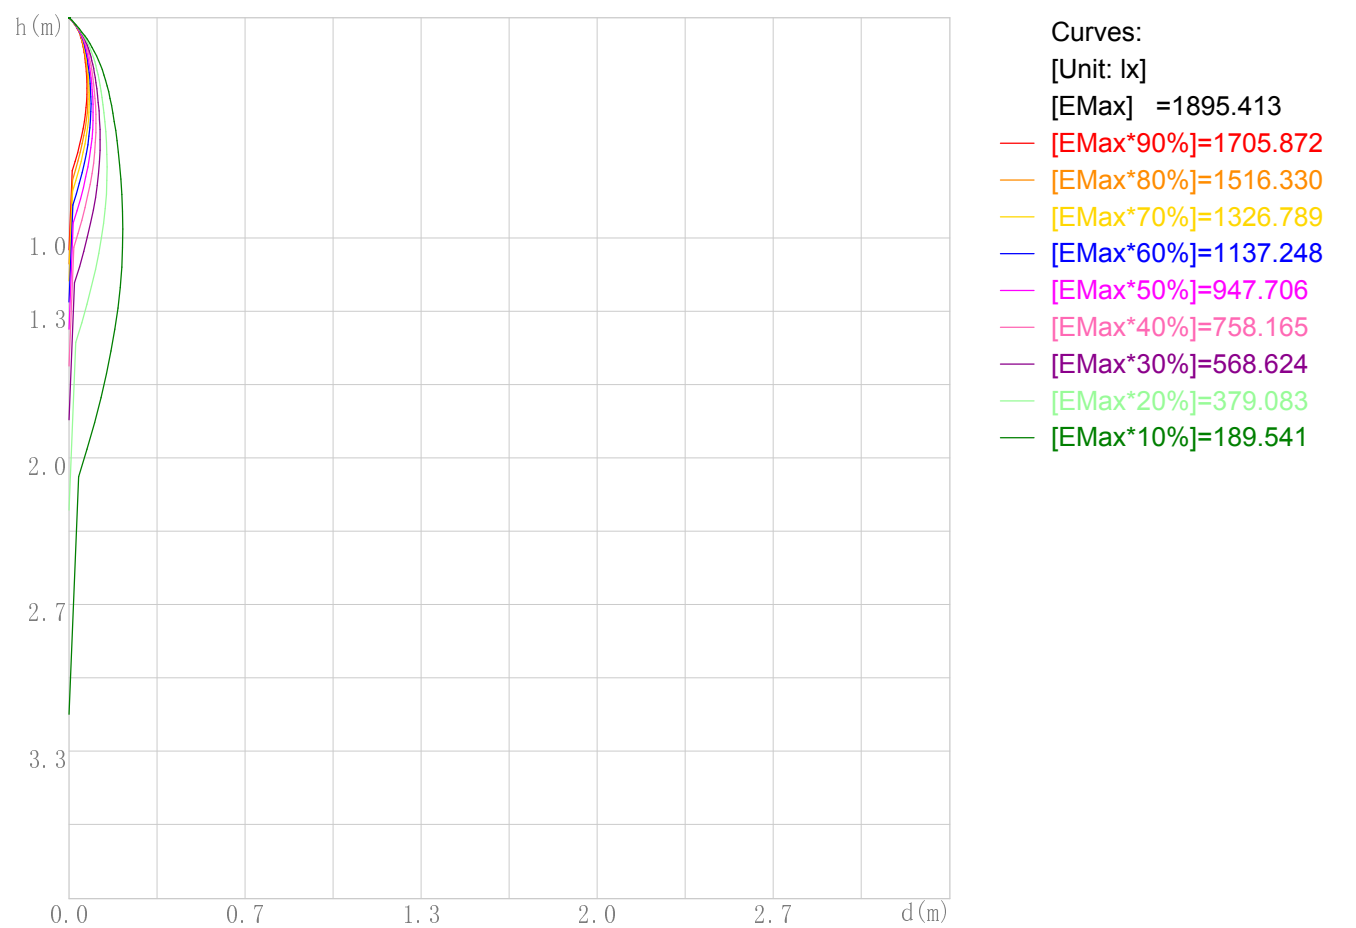

Space Plane Maximum Illuminance and @Angle:1895.41lx,0.0deg
Plane Maximum Lighting Intensity and @Angle:1895.413cd,0eg

Illuminance-Distance Diagram

Lum. Name:55252	Lum. Catelog:	Test ID:
Lamp Name:	Lamp Catelog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2024/04/25

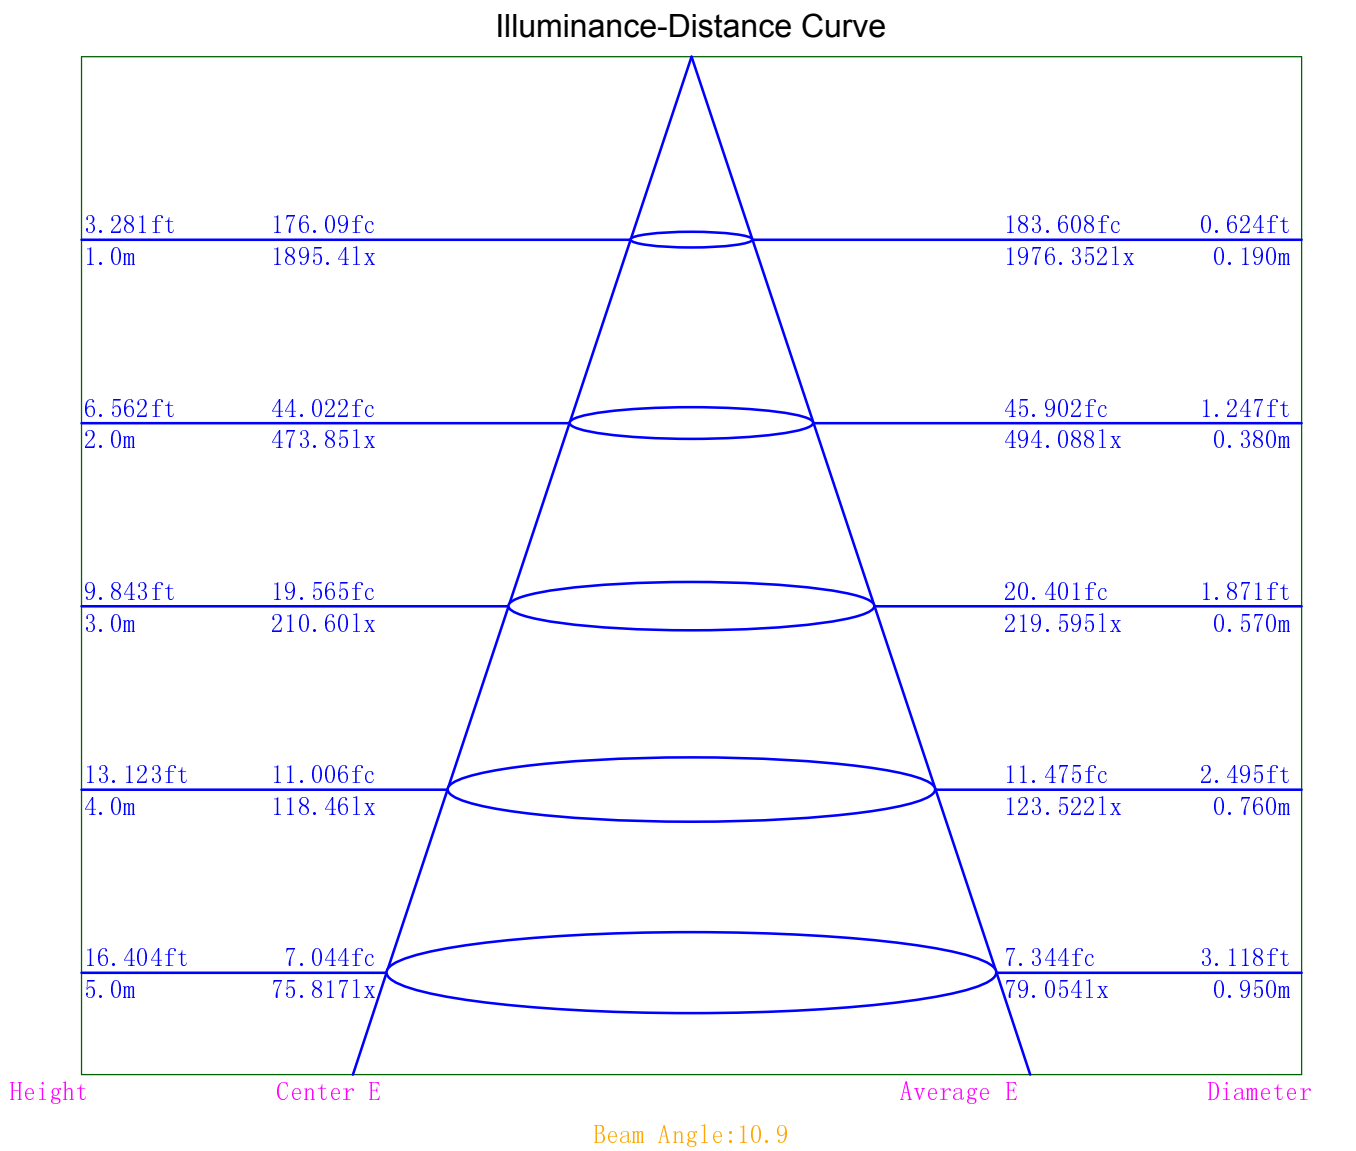

Indoor Luminance Limiting Curves

Lum. Name: 55252	Lum. Catalog:	Test ID:
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2024/04/25


Glare Grade Table

GI	Quality	Using Illuminance							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E	a				2000	1000	500	<=300
			b	c	d	e	f	g	h

Luminance Table

Gama (deg)	45	50	55	60	65	70	75	80	85
C0	0	0	0	0	0	0	0	0	0
C90	2196	0	0	0	0	0	0	0	0


Luminance Limiting Curve

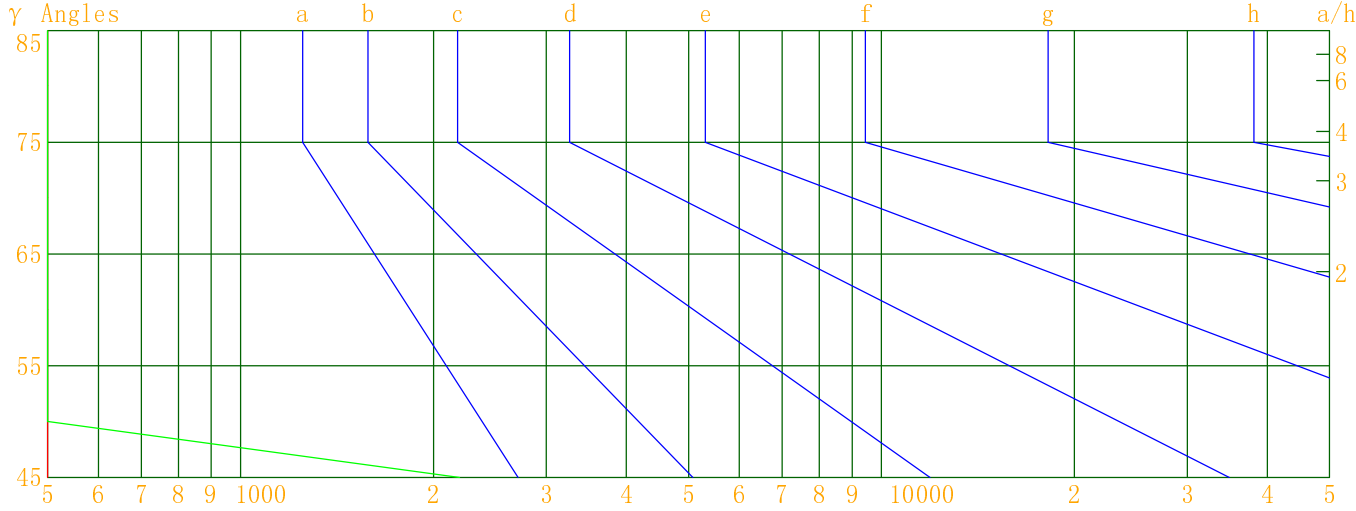

Luminous Size: Length(m)=-0.050 Width(m)=-0.050 Height(m)=0.000 Area(m^2)=0.001963
Luminous Type: Without Luminous Side
Luminous Curves: C0-C180 Color: — C90-C270 Color: —

Indoor Budgetary Estimate Table

Lum. Name: 55252	Lum. Catalog:	Test ID:
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2024/04/25

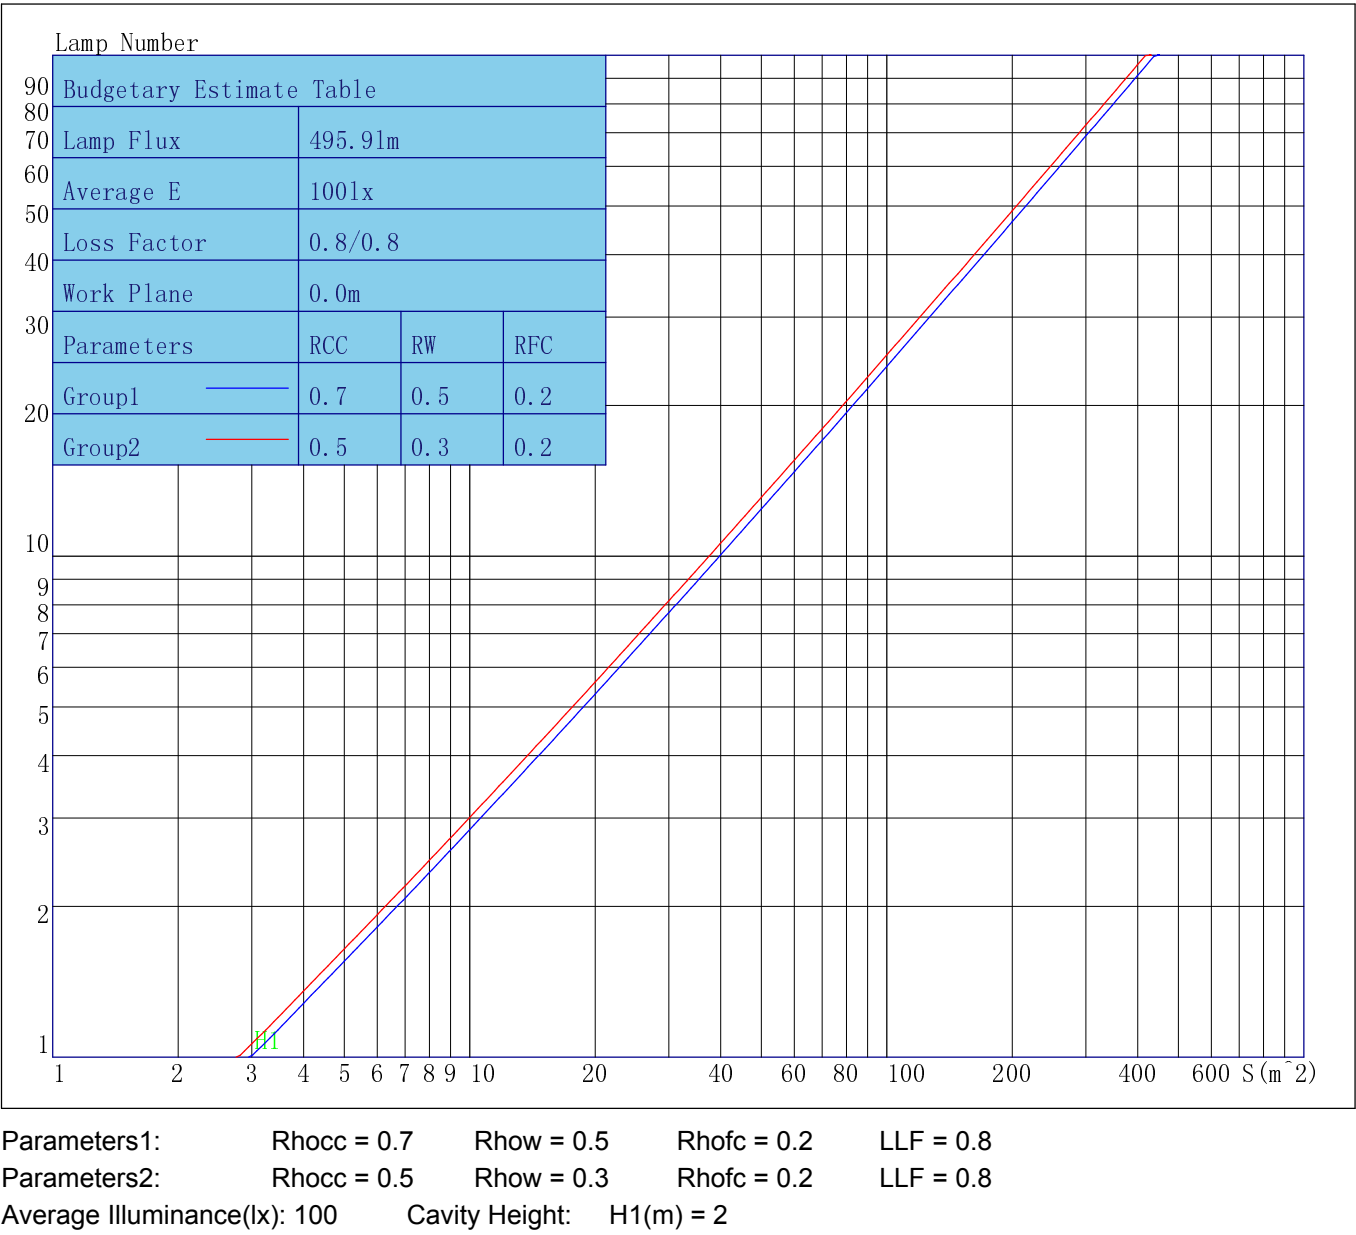

Indoor Coefficient of Utilization Table

Lum. Name:55252	Lum. Catelog:	Test ID:
Lamp Name:	Lamp Catelog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2024/04/25

Coefficients of Utilization – Zonal Cavity Method																					
Coef.	Effective Floor Cavity Reflectance RFC=0.20																				
RhoCC (%)	80				70				50				30				10				0
RhoW (%)	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	Coefficient of Utilization(%)																				
0	119	119	119	119	116	116	116	116	111	111	111	111	106	106	106	106	102	102	102	100	
1	115	113	111	109	113	111	109	107	107	105	104	104	103	102	101	101	100	99	98	96	
2	111	107	104	102	109	106	103	100	102	100	98	98	100	98	96	96	97	96	94	93	
3	107	102	99	96	105	101	98	95	99	96	94	94	96	94	92	92	94	92	91	89	
4	104	98	94	91	102	97	93	90	95	92	89	89	93	91	88	88	92	89	87	86	
5	100	94	90	87	99	93	89	87	92	88	86	86	90	87	85	85	89	86	84	83	
6	97	91	86	83	96	90	86	83	89	85	83	83	88	84	82	82	86	84	82	80	
7	94	88	83	80	93	87	83	80	86	82	80	80	85	82	79	79	84	81	79	78	
8	92	85	80	77	91	84	80	77	83	80	77	77	82	79	77	77	82	79	76	75	
9	89	82	78	75	88	82	78	75	81	77	75	75	80	77	74	74	79	76	74	73	
10	86	80	75	73	86	79	75	72	78	75	72	72	78	74	72	72	77	74	72	71	

Unified Glare Rating Table

Lum. Name: 55252	Lum. Catalog:	Test ID:
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2024/04/25

Unified Glare Rating Table

Ceiling RCC		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
Wall RW		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
Floor RFC		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room Size		Vewed crosswise					Vewed endwise				
X=2H	Y=2H	-0.1	0.6	0.2	1.0	1.3	6.5	7.3	6.9	7.6	7.9
	Y=3H	-0.3	0.3	0.0	0.7	1.0	6.3	6.9	6.7	7.3	7.6
	Y=4H	-0.4	0.1	-0.0	0.5	0.9	6.2	6.8	6.6	7.1	7.5
	Y=6H	-0.6	-0.0	-0.1	0.3	0.7	6.0	6.6	6.5	7.0	7.4
	Y=8H	-0.6	-0.1	-0.2	0.2	0.7	6.0	6.5	6.4	6.9	7.3
	Y=12H	-0.7	-0.2	-0.3	0.1	0.6	5.9	6.4	6.4	6.8	7.2
X=4H	Y=2H	-0.4	0.1	-0.0	0.5	0.9	6.2	6.8	6.6	7.1	7.5
	Y=3H	-0.7	-0.2	-0.3	0.2	0.6	5.9	6.4	6.4	6.8	7.2
	Y=4H	-0.8	-0.4	-0.4	0.0	0.5	5.8	6.2	6.3	6.6	7.1
	Y=6H	-0.9	-0.6	-0.4	-0.2	0.3	5.7	6.0	6.2	6.5	6.9
	Y=8H	-1.0	-0.7	-0.5	-0.3	0.2	5.6	5.9	6.1	6.3	6.8
	Y=12H	-1.1	-0.9	-0.6	-0.4	0.1	5.5	5.8	6.0	6.3	6.7
X=8H	Y=4H	-1.0	-0.7	-0.5	-0.3	0.2	5.6	5.9	6.1	6.3	6.8
	Y=6H	-1.1	-0.9	-0.6	-0.4	0.0	5.5	5.7	6.0	6.2	6.7
	Y=8H	-1.2	-1.1	-0.7	-0.5	-0.0	5.4	5.6	6.0	6.1	6.6
	Y=12H	-1.3	-1.2	-0.7	-0.7	-0.1	5.4	5.5	5.9	6.0	6.6
X=12H	Y=4H	-1.1	-0.9	-0.6	-0.4	0.1	5.5	5.8	6.0	6.3	6.7
	Y=6H	-1.2	-1.1	-0.7	-0.6	-0.0	5.4	5.6	6.0	6.0	6.6
	Y=8H	-1.3	-1.2	-0.7	-0.7	-0.1	5.4	5.5	5.9	6.0	6.6
Variations with the objverver position at spacings											
S=1.0H		0.0/0.0					0.0/0.0				
S=1.5H		0.0/0.0					0.0/0.0				
S=2.0H		0.0/0.0					0.0/0.0				
Reduced UGR Table:											
Nordic Standard Table:		BK0					BK0				
Correction Value		0.0					0.0				

o the CIE Pub.117, data has been corrected, refers to the lamp's lumens 8.2flm.

IES Indoor Report

Photometric Filename:FL-8001-1000-IH-15度透镜带防眩罩-黑.IES

Candela Tabulation

V/H	C0. 0	C30. 0	C60. 0	C90. 0	C120. 0	C150. 0	C180. 0	C210. 0	C240. 0	C270. 0	C300. 0	C330. 0
γ 0. 0	1895. 41	1895. 41	1895. 41	1895. 41	1895. 41	1895. 41	1895. 41	1895. 41	1895. 41	1895. 41	1895. 41	1895. 41
γ 1. 0	823. 95	970. 45	1227. 35	1929. 09	3378. 96	4563. 46	1062. 74	1223. 73	1467. 52	1996. 73	2786. 06	3152. 36
γ 2. 0	728. 61	867. 61	1113. 82	1819. 65	3505. 95	5182. 10	1225. 48	1382. 66	1580. 29	1944. 24	2412. 12	2533. 77
γ 3. 0	643. 66	775. 82	1008. 56	1678. 02	3477. 55	5597. 19	1435. 31	1565. 77	1672. 94	1842. 51	2052. 81	2032. 80
γ 4. 0	568. 03	692. 69	912. 04	1524. 94	3296. 36	5734. 14	1709. 32	1767. 78	1731. 51	1706. 52	1738. 76	1651. 92
γ 5. 0	500. 60	617. 80	824. 20	1374. 15	3001. 44	5565. 71	2060. 43	1973. 30	1748. 69	1554. 64	1481. 92	1373. 28
γ 6. 0	441. 34	549. 98	743. 91	1233. 65	2649. 00	5127. 20	2490. 26	2160. 13	1721. 74	1404. 03	1275. 57	1167. 47
γ 7. 0	388. 05	488. 49	669. 65	1106. 88	2282. 17	4497. 90	2982. 32	2301. 48	1654. 52	1262. 27	1112. 01	1010. 54
γ 8. 0	339. 44	432. 47	601. 04	993. 81	1939. 20	3790. 39	3493. 81	2380. 65	1557. 82	1132. 99	978. 46	885. 15
γ 9. 0	295. 21	381. 62	537. 54	893. 73	1640. 60	3105. 15	3965. 06	2381. 00	1442. 34	1018. 13	866. 08	778. 96
γ 10. 0	254. 68	335. 35	479. 72	802. 74	1394. 55	2506. 42	4305. 19	2302. 05	1319. 80	916. 64	769. 22	686. 90
γ 11. 0	218. 14	293. 14	426. 49	719. 87	1197. 53	2018. 58	4452. 62	2157. 12	1200. 20	824. 60	683. 90	605. 34
γ 12. 0	186. 13	254. 45	378. 40	644. 58	1040. 65	1637. 78	4391. 21	1970. 97	1087. 29	742. 52	607. 38	533. 45
γ 13. 0	157. 95	219. 37	334. 05	575. 38	912. 42	1346. 37	4124. 67	1766. 47	983. 91	666. 86	539. 10	469. 98
γ 14. 0	133. 68	187. 62	293. 01	512. 01	803. 64	1125. 74	3711. 31	1561. 78	889. 85	597. 16	476. 61	413. 12
γ 15. 0	112. 74	159. 83	254. 84	454. 54	709. 86	959. 55	3214. 86	1372. 77	804. 07	533. 16	420. 41	361. 90
γ 16. 0	95. 30	135. 77	219. 92	402. 22	626. 96	830. 19	2709. 54	1206. 56	725. 68	474. 27	370. 07	315. 18
γ 17. 0	80. 77	115. 01	188. 54	354. 45	553. 74	725. 50	2250. 72	1062. 77	653. 41	421. 11	324. 35	272. 57
γ 18. 0	68. 77	97. 66	160. 93	310. 45	489. 26	637. 33	1860. 58	942. 48	586. 53	373. 52	282. 59	234. 38
γ 19. 0	58. 83	83. 07	136. 74	269. 65	431. 31	561. 65	1543. 72	838. 91	525. 08	329. 74	244. 33	199. 92
γ 20. 0	50. 57	70. 71	115. 82	232. 24	379. 75	494. 17	1292. 00	748. 06	468. 24	289. 44	209. 40	169. 74
γ 21. 0	43. 62	60. 29	98. 32	198. 31	332. 24	434. 49	1096. 01	667. 65	416. 21	252. 01	178. 30	143. 37
γ 22. 0	37. 71	51. 80	83. 40	168. 55	288. 12	381. 33	943. 12	595. 62	369. 17	217. 47	151. 15	120. 57
γ 23. 0	32. 52	44. 74	70. 99	142. 48	247. 52	333. 13	823. 10	530. 63	326. 27	186. 23	127. 78	101. 61
γ 24. 0	28. 14	38. 77	60. 66	120. 19	211. 07	288. 92	724. 20	471. 84	286. 71	158. 75	107. 78	85. 88
γ 25. 0	24. 34	33. 62	52. 12	101. 30	178. 73	248. 35	641. 06	417. 85	250. 15	134. 75	91. 02	72. 86
γ 26. 0	20. 95	29. 10	44. 94	85. 46	150. 62	210. 81	567. 02	369. 16	216. 23	114. 13	76. 94	61. 97
γ 27. 0	18. 06	25. 19	38. 85	72. 31	126. 22	175. 44	500. 97	324. 05	185. 39	96. 46	65. 33	53. 12
γ 28. 0	15. 35	21. 75	33. 59	61. 34	105. 37	145. 95	441. 34	282. 57	157. 96	81. 60	55. 83	45. 71
γ 29. 0	13. 02	18. 84	29. 21	52. 36	87. 52	121. 64	387. 96	244. 65	133. 85	69. 34	47. 98	39. 48
γ 30. 0	10. 94	16. 20	25. 27	44. 99	73. 60	101. 69	339. 00	210. 42	113. 28	59. 25	41. 47	34. 11
γ 31. 0	9. 02	13. 85	21. 97	38. 94	62. 30	83. 02	294. 51	179. 33	95. 86	50. 97	35. 98	29. 49
γ 32. 0	7. 37	11. 67	19. 03	33. 58	53. 10	67. 65	253. 41	151. 86	80. 99	43. 98	31. 18	25. 57
γ 33. 0	5. 88	9. 75	16. 44	29. 10	45. 06	56. 06	216. 28	127. 80	68. 46	38. 06	27. 00	22. 17
γ 34. 0	4. 51	7. 97	13. 92	25. 22	37. 71	46. 63	183. 26	107. 71	58. 56	32. 85	23. 39	19. 02
γ 35. 0	3. 31	6. 41	11. 53	21. 92	31. 53	38. 88	154. 15	90. 76	50. 31	28. 55	20. 26	16. 28
γ 36. 0	2. 38	5. 04	9. 50	19. 08	26. 49	32. 81	129. 10	76. 83	43. 42	24. 76	17. 57	13. 90
γ 37. 0	1. 49	3. 78	7. 89	16. 50	22. 22	27. 87	108. 24	65. 18	37. 70	21. 46	15. 14	11. 82
γ 38. 0	0. 95	2. 73	6. 49	14. 20	18. 83	23. 82	90. 78	55. 67	32. 71	18. 56	12. 89	9. 86
γ 39. 0	0. 45	1. 83	5. 23	12. 15	15. 92	20. 43	76. 35	47. 80	28. 38	15. 85	10. 82	8. 10
γ 40. 0	0. 06	1. 14	4. 02	10. 00	13. 45	17. 33	64. 48	41. 22	24. 65	13. 61	9. 04	6. 54
γ 41. 0	0. 00	0. 63	2. 96	8. 16	11. 25	14. 36	54. 58	35. 71	21. 49	11. 48	7. 39	5. 15
γ 42. 0	0. 00	0. 24	2. 13	6. 67	9. 05	11. 96	46. 65	31. 01	18. 69	9. 64	5. 92	3. 91
γ 43. 0	0. 00	0. 00	1. 58	5. 23	7. 19	10. 05	40. 20	27. 03	16. 17	7. 97	4. 70	2. 86
γ 44. 0	0. 00	0. 00	1. 21	4. 03	5. 80	8. 46	34. 68	23. 49	13. 95	6. 58	3. 59	2. 01
γ 45. 0	0. 00	0. 00	0. 89	3. 05	4. 59	6. 92	29. 83	20. 48	11. 89	5. 26	2. 54	1. 26
γ 46. 0	0. 00	0. 00	0. 49	2. 00	3. 56	5. 59	25. 36	17. 72	10. 03	4. 13	1. 74	0. 73

Photometric Filename:FL-8001-1000-IH-15度透镜带防眩罩-黑.IES

[illegible]

Photometric Filename:FL-8001-1000-IH-15度透镜带防眩罩-黑.IES

[illegible]

Photometric Filename:FL-8001-1000-IH-15度透镜带防眩罩-黑.IES

V/H	C0.0	C30.0	C60.0	C90.0	C120.0	C150.0	C180.0	C210.0	C240.0	C270.0	C300.0	C330.0
γ 141.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 142.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 143.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 144.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 145.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 146.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 147.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 148.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 149.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 150.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 151.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 152.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 153.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 154.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 155.0	0.00	0.00	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 156.0	0.00	0.00	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 157.0	0.00	0.00	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 158.0	0.00	0.00	0.16	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 159.0	0.00	0.00	0.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 160.0	0.00	0.00	0.31	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 161.0	0.00	0.00	0.24	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 162.0	0.00	0.00	0.33	0.16	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 163.0	0.00	0.00	0.33	0.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 164.0	0.00	0.00	0.34	0.22	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 165.0	0.00	0.00	0.38	0.18	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 166.0	0.00	0.00	0.32	0.21	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 167.0	0.00	0.00	0.40	0.25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 168.0	0.00	0.00	0.39	0.29	0.00	0.00	0.00	0.00	0.04	0.00	0.00	0.00
γ 169.0	0.00	0.00	0.41	0.23	0.00	0.00	0.00	0.00	0.10	0.02	0.00	0.00
γ 170.0	0.00	0.00	0.49	0.24	0.00	0.00	0.00	0.00	0.15	0.02	0.00	0.00
γ 171.0	0.00	0.00	0.37	0.25	0.00	0.00	0.00	0.00	0.13	0.00	0.00	0.00
γ 172.0	0.00	0.00	0.33	0.28	0.00	0.00	0.00	0.00	0.14	0.00	0.00	0.00