

Deep series

Deep 3W
Anti-glare index UGR<3




Deep 5W
Anti-glare index UGR<6



ng sleeve A

Anti-glare low UGR design with super visual comfort

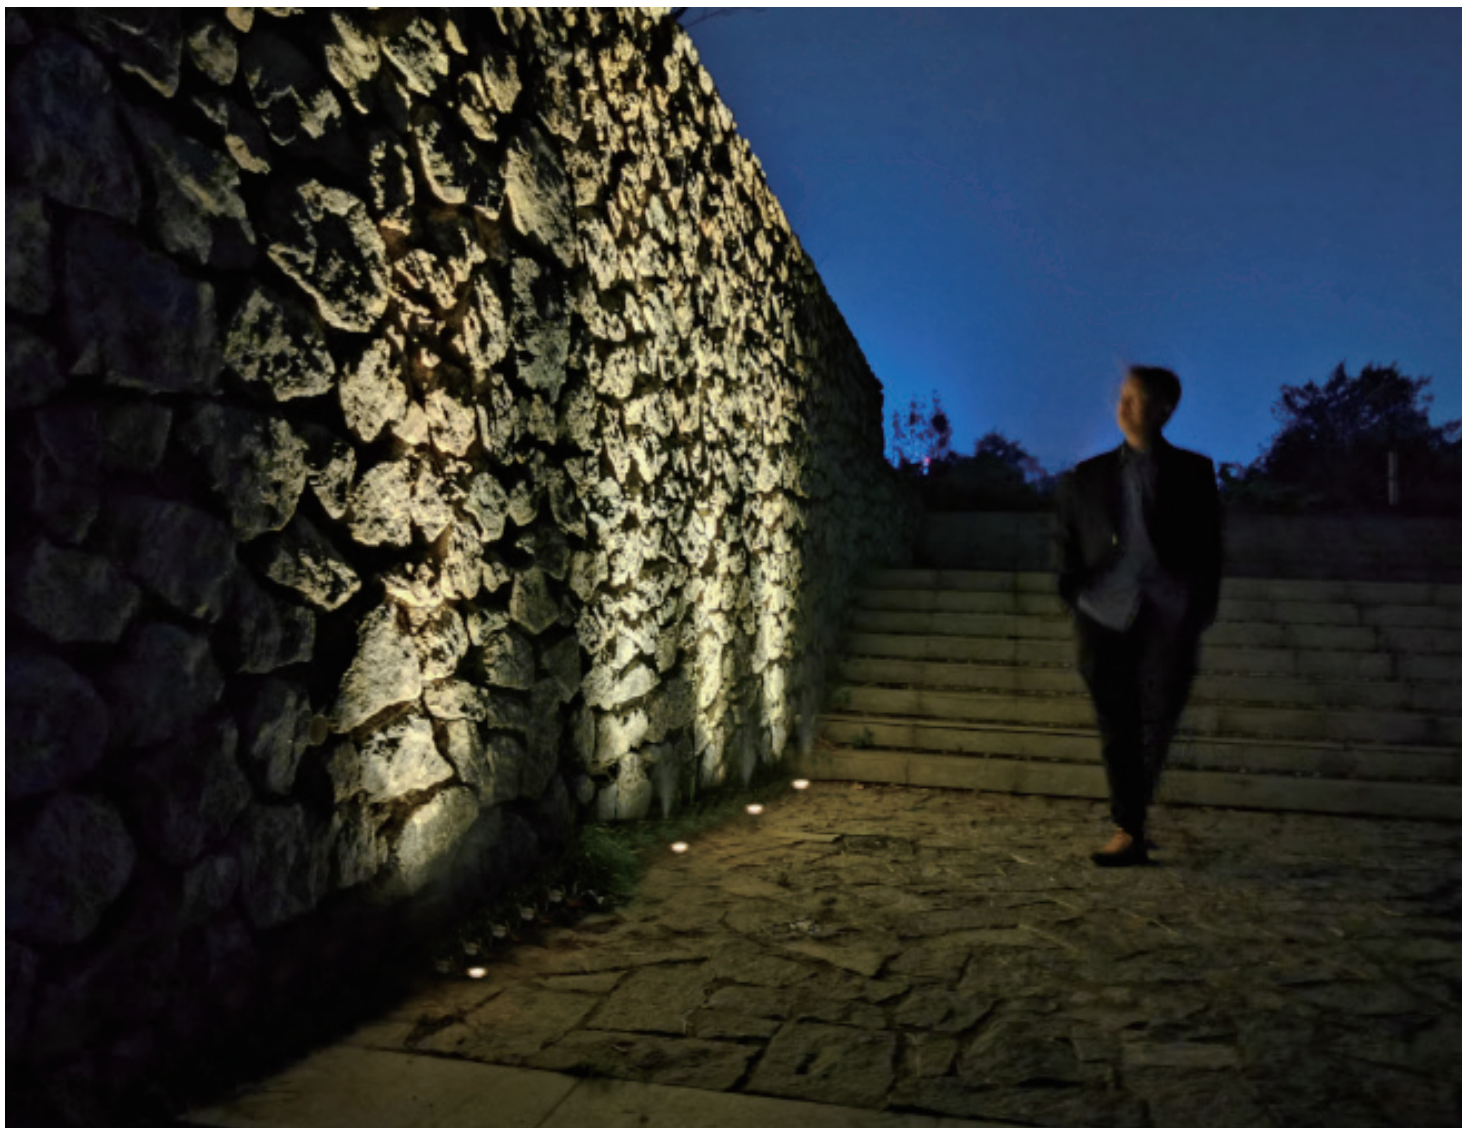




PLAYLITE®


Deep 3W




Dimension

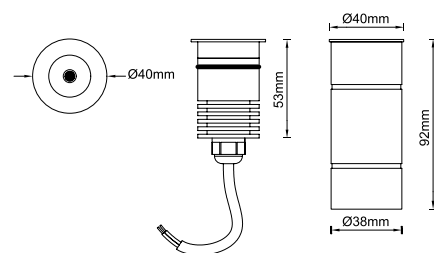


Light Distribution Curve (3000K, 20°)

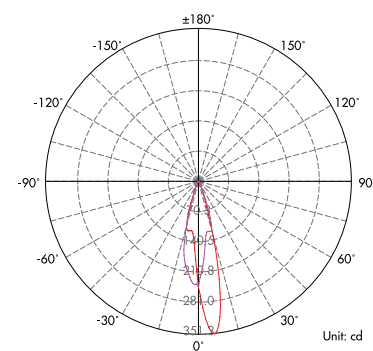

Lux distance Curve (3000K, 20°)

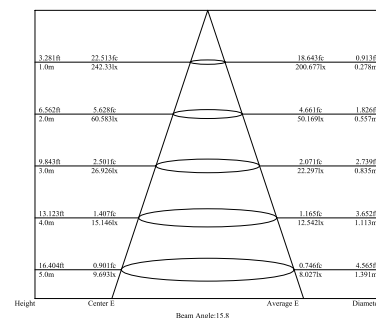

Illumination Picture (20°)

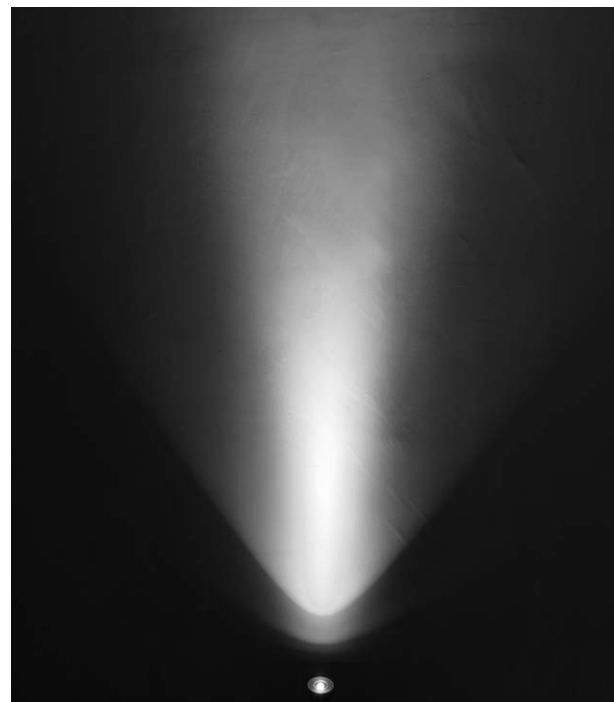

CE RoHS COMPLIANT IP67 IK06 SSS 316 3 Years Warranty

Parameter

General Data

Item No.	UL-1026-0300-A
Power	3 Wwatts $\pm$ 10%
LED type	1 PC 3W OSRAM 3030 LED
Luminous flux	60lm $\pm$ 10%
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	20°
Dimension	Ø40x53 (mm) Diameter x length
Cut out	Ø38 (mm)
Net weight	0.35 kgs
Warranty	3 years
Certifications	CE, RoHS

Electrical Data

Input voltage	DC 12VDC24V
Insulation class	Class III
Cable	1PC rubber cable 1M H05RN-F 2x1mm square
Driver	Low constant voltage input driver, constant current output for LEDs

Construction Data

IP rating	IP67 Waterproof
IK rating	IK06
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing. Dark grey
Trim	Stainless steel 316
Glass	Step tempered Glass. T=4mm.
Loading capacity	300 kgs
Cable Gland	PG gland
Gasket	O-ring PMQ silicone seal

Accessories

Mounting Sleeve	Passivated (Anodizing) Aluminum CNC machined. Dark grey
-----------------	---

Packaging

Inner box size	110*85*60 mm
Carton size	44*24*32 cm (50 PCS / carton)

INGROUND LIGHTS SERIES





PLAYLITE®

Deep 5W



IP67 IK06


SSS 316

3 Years Warranty


Parameter

General Data	
Item No.	UL-1026-0500-A
Power	4.5 W±10%
LED type	1 PC CREE XPG LED
Luminous flux	150lm ± 10%
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	20°
Dimension	Ø65x67 (mm) Diameter x length
Cut out	Ø53 mm
Net weight	0.45 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC12V-DC24V
Insulation class	Class III
Cable	1PC rubber cable 1M H05RN-F 2x1mm square
Driver	Low constant voltage input driver, constant current output for LEDs
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK06
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing. Dark grey
Trim	Stainless steel 316
Glass	Step tempered Glass, T=6mm.
Loading capacity	300 kgs
Cable Gland	PG gland
Gasket	O-ring PMQ silicone seal
Accessories	
Mounting Sleeve	Passivated (Anodizing) Aluminum CNC machined. Dark grey
Packaging	
Inner box size	130*115*80 mm
Carton size	36.5*28*26 cm 18 PCS / carton


Dimension

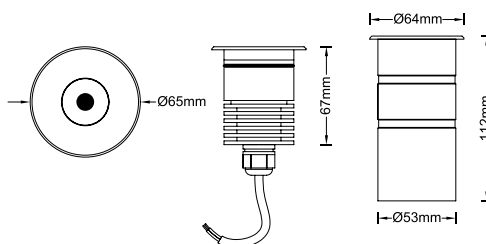


Light Distribution Curve (3000K, 20°)

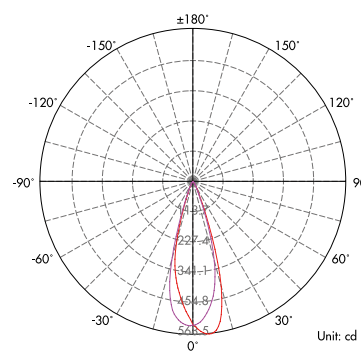

Lux distance Curve (3000K, 20°)

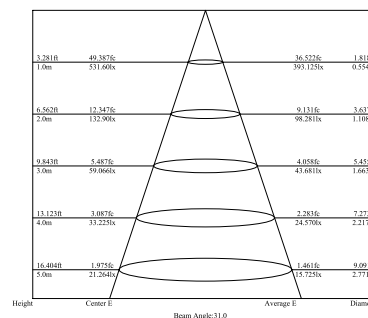

Illumination Picture (20°)

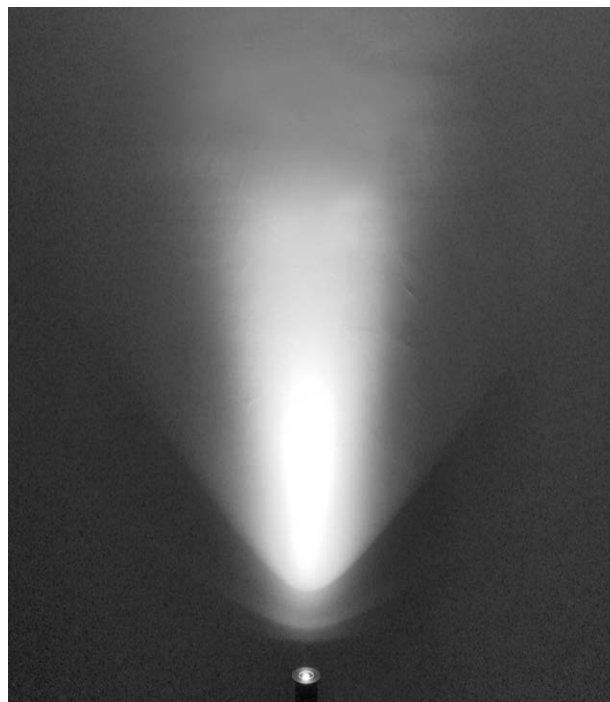

INGROUND LIGHTS SERIES

