



Marine RC




Marine SF

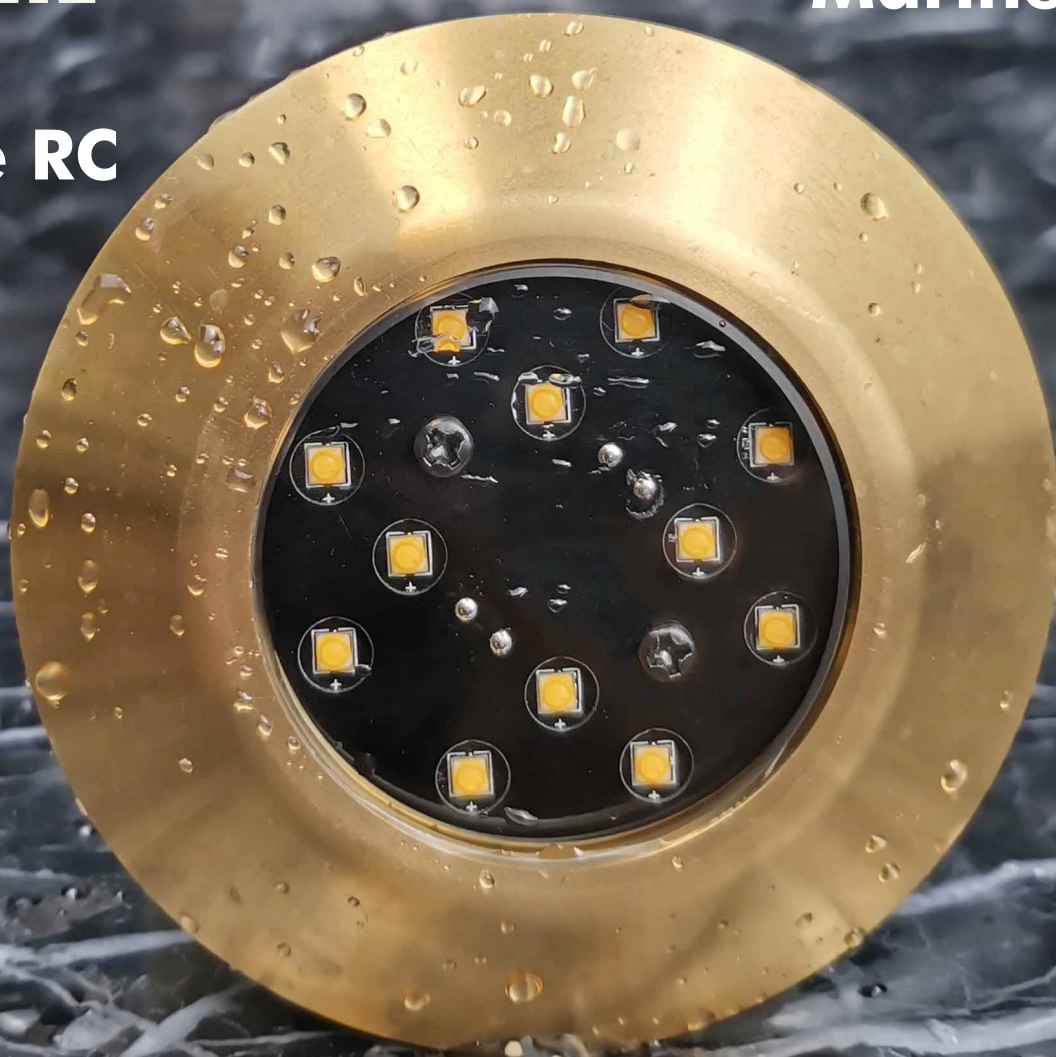

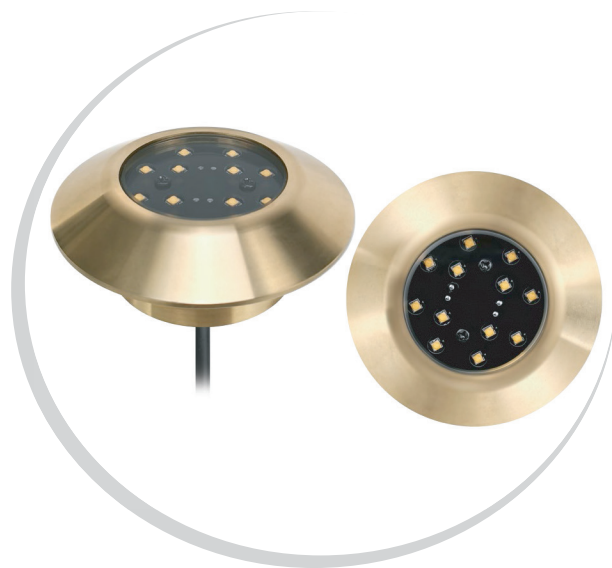


CE RoHS COMPLIANT IP68 IK07
Copper 3 Years Warranty


Dimension

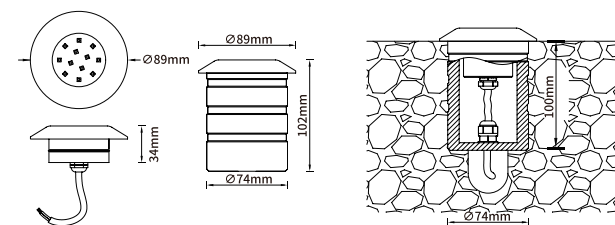


Light Distribution Curve (3000K, 110°)

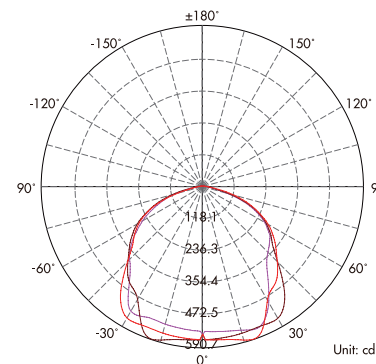

Lux distance Curve (3000K, 110°)

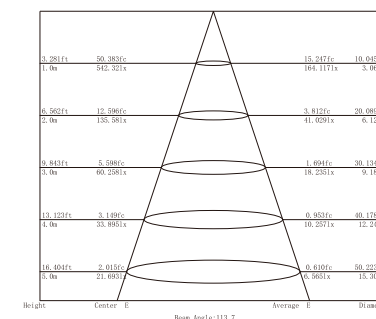

Illumination Picture (110°)

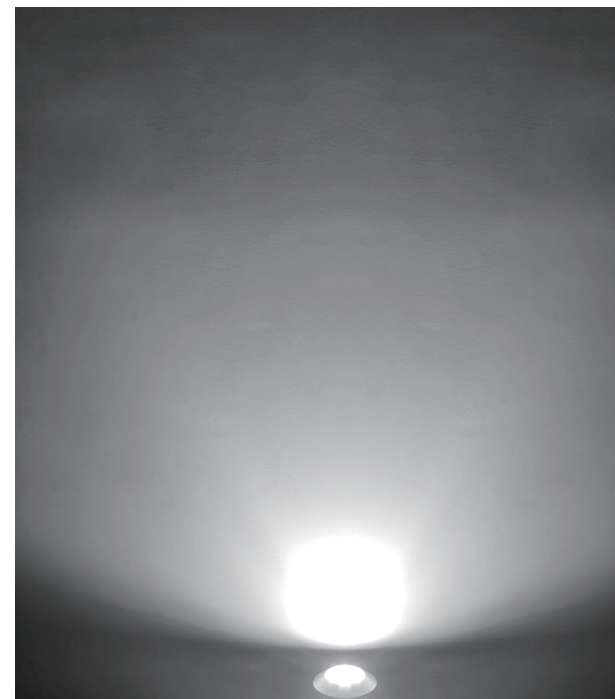

Parameter

General Data	
Item No.	SL-1201-2400-C
Power	24V±10%
LED type	12 PCS OSRAM 3030 LED
Luminous flux	1600 lm ±10%
CCT	2700K\3000K\4000K\4500K\5700K\6500K
CRI	80+
Beam angle	110°
Dimension	Ø89x34 (mm) Diameter x length
Cut out	Ø74 (mm) Diameter
Net weight	1 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC24V
Insulation class	Class III
Cable	2M H05RN-F 2x1.0 mm square
Driver	constant low voltage input, constant current output for LEDs
Construction Data	
IP rating	IP68 Waterproof
IK rating	IK07
Housing	Copper
Protection finishing	/
Trim	Copper
Glass	Tempered Glass
Loading capacity	/
Cable Gland	PG gland
Accessories	
Mounting box	Nylon mounting box
Packaging	
Inner box size	160*130*130 mm
Carton size	41.5*34*28 cm(12 PCS/carton)





IP68 IK07

Copper


3 Years Warranty

UNDERWATER LIGHTS SERIES


Parameter

General Data	
Item No.	SL-600S-1500-A
Power	15W±10%
LED type	6 PCS OSRAM 3030 LED
Luminous flux	700 lm ±10%
CCT	2700K\3000K\4000K\4500K\5700K\6500K
CRI	80+
Beam angle	15°,24°,40°
Dimension	Ø89x20 (mm) Diameter x length
Cut out	Surface mounted, 3PCS screw holes Φ6mm
Net weight	0.6 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC12V-DC24V
Insulation class	Class III
Cable	2M H05RN-F 2x1.0 mm square
Driver	constant low voltage input, constant current output for LEDs
Construction Data	
IP rating	IP68 Waterproof
IK rating	IK07
Housing	Copper
Protection finishing	/
Trim	Copper
Glass	Tempered Glass
Loading capacity	/
Cable Gland	PG gland
Gasket	silicone ring + silicone glue seal
Accessories	
Screw	Screws for surface mounted
Packaging	
Inner box size	100*100*100mm
Carton size	42*32*22 cm (24PCS/carton)


Dimension

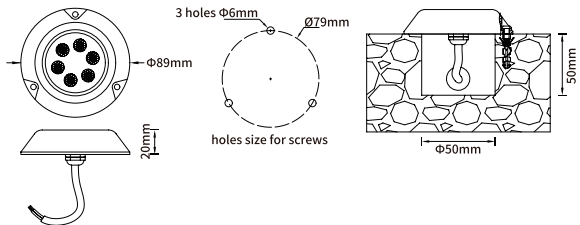


Light Distribution Curve (3000K,15°)

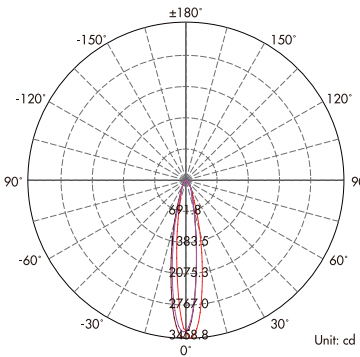

Lux distance Curve (3000K,15°)

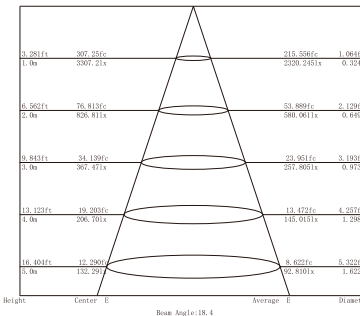

Illumination Picture (15°)

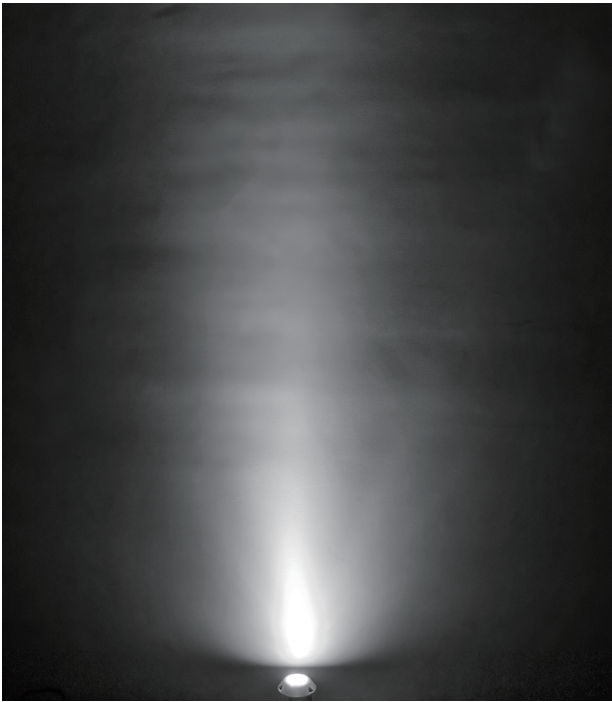


Features

- .Anti-corrosion copper housing with excellent heat-conducting ,small housing but big power
- .IP68 waterproof
- .Ideal for the pool even with chlorine water,outdoor pool even near the sea and other underwater places
- .Marine RC is with nylon mounting box for recessed mounting,while Marine SF is for surface mounting
- .OSRAM 3030 LED with LM80 approval.
- . 3 years warranty.
- . Structure silicone seal+ glue seal for IP68.
- . Professional sales and technicians to serve you.

Installation

Marine RC recessed with mounting box

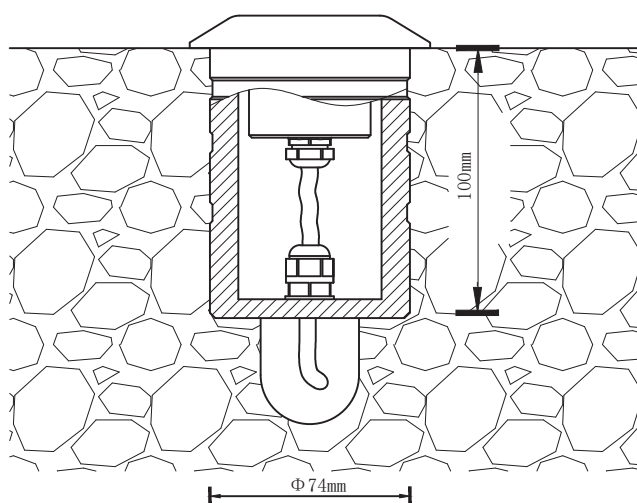

Marine SF surface mounted with screws

