



PLAYLITE®

Lucca mini

PLAYLITE®



CE IP65 IK02

3 Years Warranty

Parameter

General Data	
Item No.	LL-1001-0100-AL-250 / LL-1001-0100-AL-400 / LL-1001-0100-AL-500
Power	1 watts +10%
LED type	LUMILEDS LED
Luminous flux	50 lm+10%
CCT	2700K/3000K/4000K/5700K/6500K
CRI	80+
Beam angle	120°

Pole:120*8 (mm) (Length x Diameter)+Spike: 130mm height
Pole:270*8 (mm) (Length x Diameter)+Spike: 130mm height
Pole:420*8 (mm) (Length x Diameter)+Spike: 130mm height


Dimension	
Cut out	
Net weight	0.06 / 0.09 / 0.12 kgs
Warranty	3 years
Certifications	CE

Electrical Data	
Input voltage	DC24V
Insulation class	Class III
Cable	1PC 0.4M 2 *0.35mm2 PVC cable
Driver	Linear driver with DC24V input , PWM dimmable

Construction Data	
IP rating	IP65 Waterproof
IK rating	IK02
Housing	Aluminium
Protection finishing	Passivated +powder coated painted in dark grey colour or other colours
Top	PMMA frosted
Loading capacity	/ kgs
Cable Gland	/
Gasket	/
Accessories	
Spike	Aluminium

Packaging	
Inner box size	30*30*300 / 30*30*450 / 30*30*600 (mm)
Carton size	31.5*32.5*32.5 cm (100PCS/CTN) 46.5*32.5*17.5cm (50PCS/CTN) 61.5x32.5x32.5 cm (50PCS/CTN)

Dimension

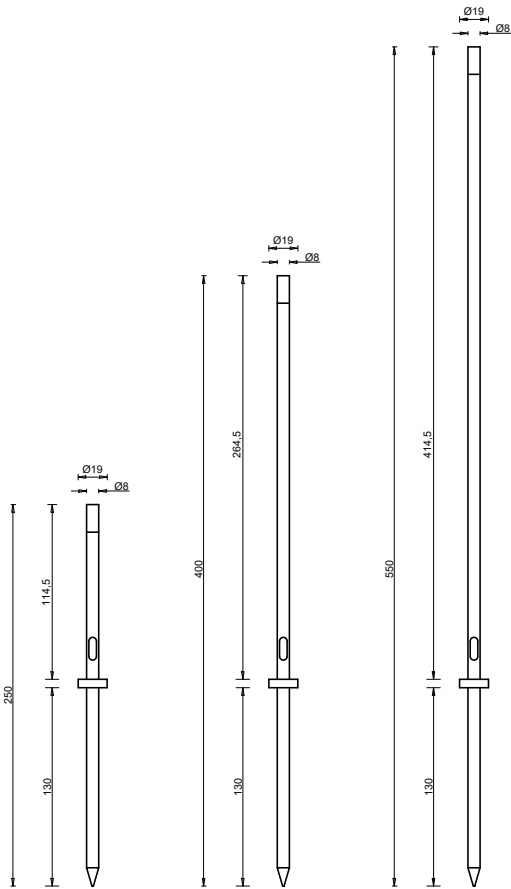

Passivated+ painted available colour for housing:

Coffee silver No.9383	Dark grey No.7678	Matt black No.7648	Matt white No.9003

Illumination Picture (100°)






PLAYLITE®




CE RoHS COMPLIANT IP65
3 Years Warranty

Parameter	
General Data	
Item No.	LL-1001-0100-B
Power	1.4W±10%
LED type	1 PC 3V OSRAM 3030 LED
Luminous flux	35lm ± 10%
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	110°
Dimension	500 or 1000 or 1200*16 (mm) (Length x Diameter)
Cut out	/
Net weight	0.43 /0.4 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC 12V-DC24V
Insulation class	Class III
Cable	1PC rubber cable 1M H05RN-F 2x0.5mm square
Driver	Low constant voltage input driver, constant current output for LEDs
Construction Data	
IP rating	IP65 Waterproof
IK rating	IK02
Housing	Aluminum tube
Protection finishing	Anodized + powder coated painted in dark grey
Top	frosted PMMA top part
Loading capacity	/
Cable Gland	Aluminum gland
Gasket	silicone glue seal
Accessories	
Spike	With Aluminium spike painting in dark grey, 205 mm height
Packaging	
Inner box size	/ mm
Carton size	/ cm (/ PCS / carton)


Dimension

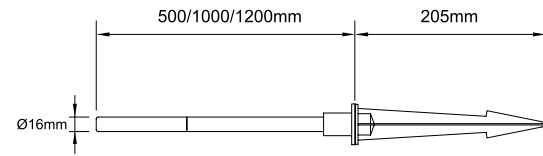

Light Distribution Curve (3000K, 110°)

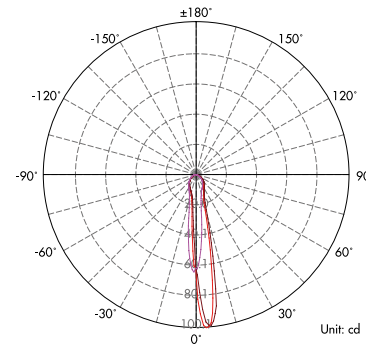

Lux distance Curve (3000K, 110°)

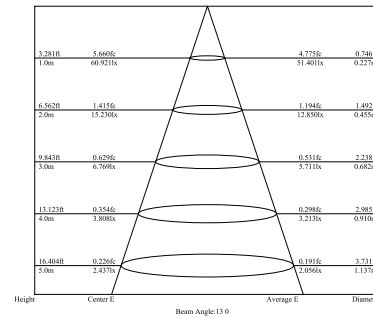

Illumination Picture (110°)







CE RoHS COMPLIANT IP65
3 Years Warranty

Parameter	
General Data	
Item No.	AC100-245V 50/60Hz: IL-1001-0300-CH / DC12V-24V: IL-1001-0300-C
Power	3.5W ± 10%
LED type	1 PC 3V CREE MHB LED
Luminous flux	60lm ± 10%
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	110°
Dimension	1200 or 1000*15/45 (mm) (Length x Diameter top/Diameter base)
Cut out	/
Net weight	0.65 kgs /0.6 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100-245V 50/60Hz or DC12V-24V
Insulation class	Class I or III
Cable	1PC rubber cable 1M HO5RNF 3 or 2 x1mm square
Driver	AC100-245V 50/60Hz: with built-in constant current driver for LEDs DC24V: constant low voltage input, constant current output for LEDs
Construction Data	
IP rating	IP65 Waterproof
IK rating	IK02
Housing of base	Aluminum
Protection finishing	Anodized + powder coated painted in dark grey
Top	frosted PMMA top part
Body	double tubes: one PMMA tube with bubbles inside + one PC tube outside
Loading capacity	/
Cable Gland	PG gland
Gasket	silicone glue seal
Accessories	
Spike	With Aluminium spike painting in dark grey, 205 mm height
Packaging	
Inner box size	/ mm
Carton size	/ cm (/ PCS / carton)


Dimension

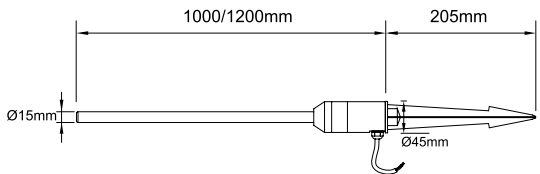

Light Distribution Curve (3000K, 110°)

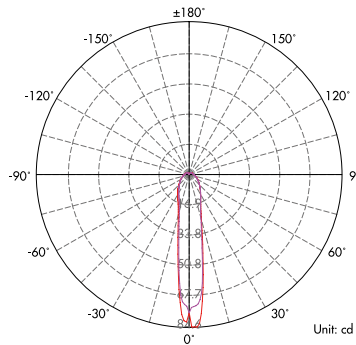

Lux distance Curve (3000K, 110°)

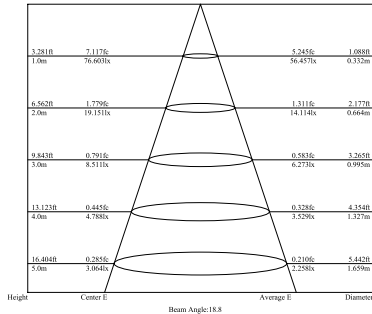

Illumination Picture (110°)

