




PLAYLITE®

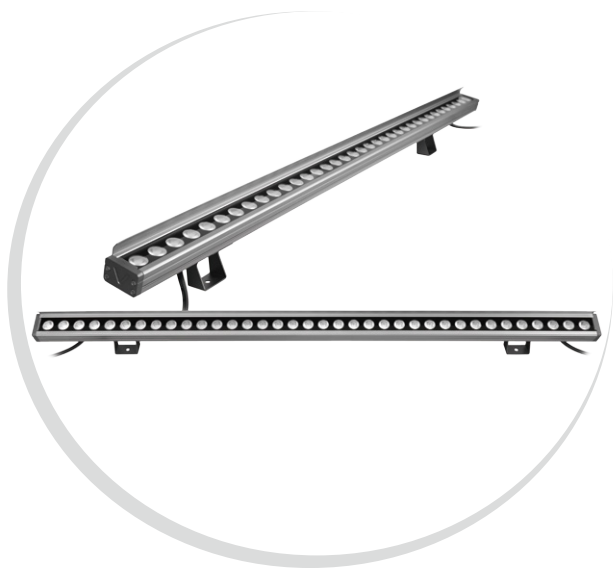

CE RoHS COMPLIANT IP65 IK04

3 or 5 Years Warranty

Parameter

General Data

Item No.	LWWW-3601-3600-B
Power	36W
LED type	36 PCS 1W OSRAM LED
Luminous flux	2700lm
CCT	2700K, 3000K, 4500K, 6000K
CRI	80+
Beam angle	12°/24°/30°/40°/60° or Oval lens 15°/40°
Dimension	1000*45*28 mm (Length x Width x Height) (500mm as options)
Cut out	/
Net weight	1.75 kgs
Warranty	3 years
Certifications	CE, RoHS

Electrical Data

Input voltage	DC24V (AC100-245V 50/60Hz version optional)
Insulation class	Class III
Cable	2 PCS rubber cables with waterproof connectors, one side male, another side female
Driver	Low voltage constant current output, excluding the transformer
Control	Stand alone

Construction Data

IP rating	IP65 Waterproof
IK rating	IK04
Housing	Passivated (Anodizing) Aluminium
Protection finishing	20~25µm thickness anodized film for housing. Dark grey
Trim	Aluminium+glass
Glass	Tempered Glass T=4mm
Loading capacity	220kgs
Cable Gland	PG IP65
Gasket	PMQ silicone gasket seal


Accessories

Bracket	Aluminium bracket
Barn door	Without barn door as standard, and with barn door as options


Packaging

Inner box size	1068*85*75mm
Carton size	108.5*28*24 cm (6PCS / carton)


Dimension

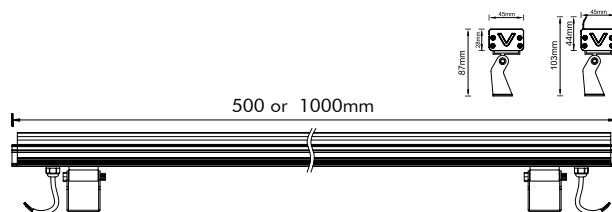


Light Distribution Curve (3000K, 15°/40°)

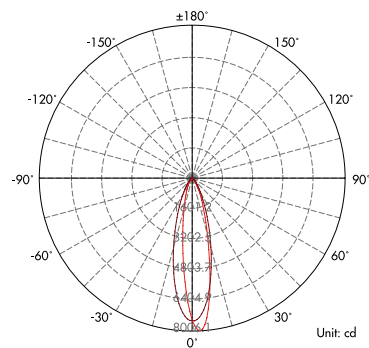

Lux distance Curve (3000K, 15°/40°)




Illumination Picture (15x40°)

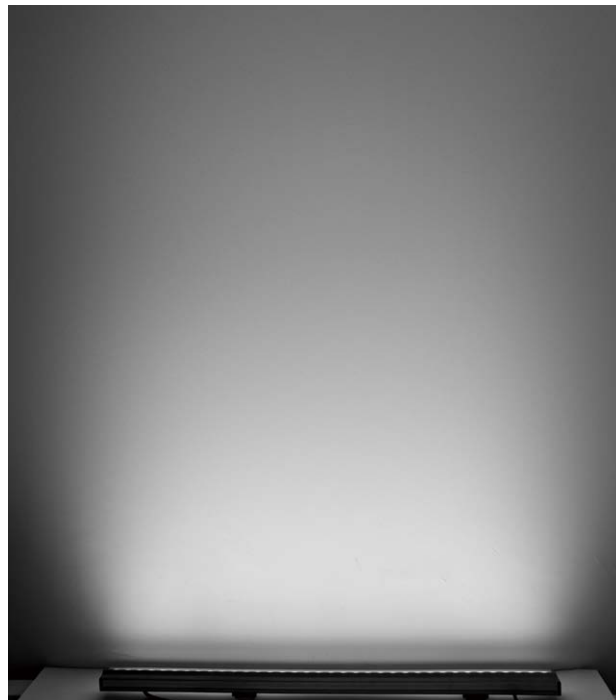

LED WALL WASHER SERIES



PLAYLITE®

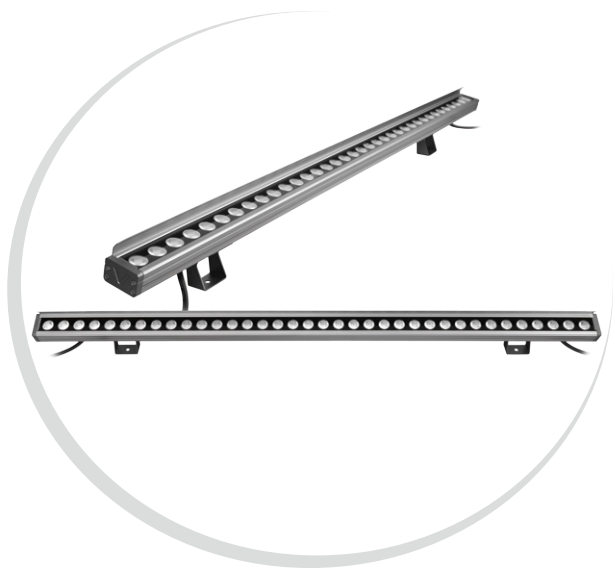

CE RoHS COMPLIANT IP65 IK04
3 Years Warranty

Parameter

General Data

Item No.	LWWW-3601-4800-B
Power	48W
LED type	36 PCS 1.3W OSRAM LED
Luminous flux	3200lm
CCT	2700K, 3000K, 4500K, 6000K
CRI	80+
Beam angle	12°/24°/30°/40°/60° or Oval lens 15°/40°
Dimension	1000*45*28 mm (Length x Width x Height) (500mm as options)
Cut out	/
Net weight	1.75 kgs
Warranty	3 years
Certifications	CE, RoHS

Electrical Data

Input voltage	DC24V (AC100-245V 50/60Hz version optional)
Insulation class	Class III
Cable	2 PCS rubber cables with waterproof connectors, one side male, another side female
Driver	Low voltage constant current output, excluding the transformer
Control	Stand alone

Construction Data

IP rating	IP65 Waterproof
IK rating	IK04
Housing	Passivated (Anodizing) Aluminium
Protection finishing	20~25µm thickness anodized film for housing. Dark grey
Trim	Aluminium+glass
Glass	Tempered Glass T=4mm
Loading capacity	220kgs
Cable Gland	PG IP65
Gasket	PMQ silicone gasket seal


Accessories

Bracket	Aluminium bracket
Barn door	Without barn door as standard, and with barn door as options


Packaging

Inner box size	1068*85*75mm
Carton size	108.5*28*24 cm (6PCS / carton)


Dimension

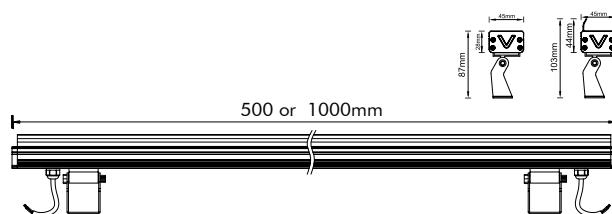


Light Distribution Curve (3000K, 15°/40°)

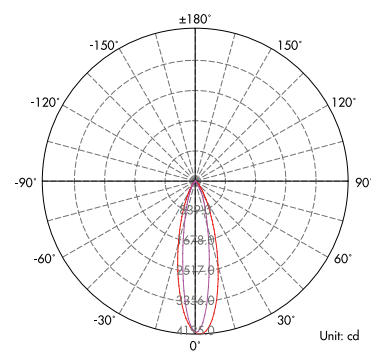

Lux distance Curve (3000K, 15°/40°)



Illumination Picture (15x40°)

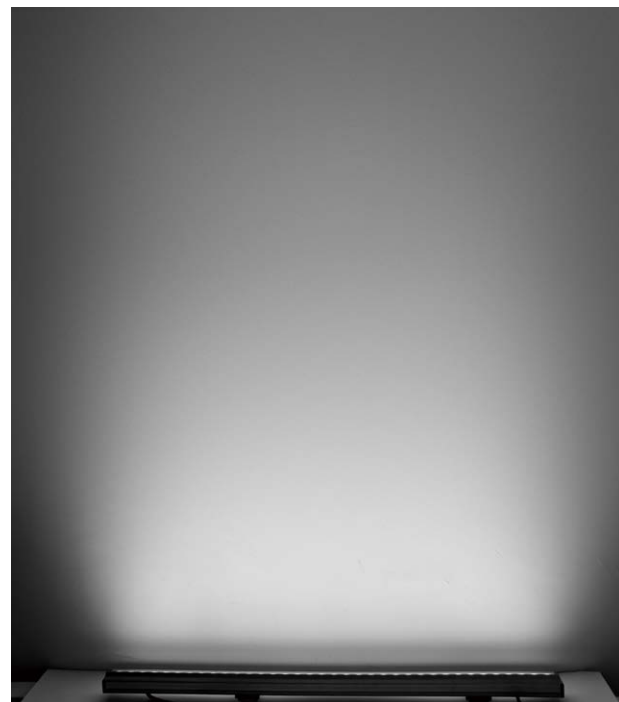

LED WALL WASHER SERIES

