



PLAYLITE®

Verona 5



IP65 IK05


3 or 5 Years Warranty

Parameter


General Data	
Item No.	DL-5W-COB-0500-BH
Power	5 watts +10%
LED type	1 PC 5W CREE CXA1304 COB LED
Luminous flux	350lm+10%
CCT	2700K/3000K/4000K/5700K/6500K
CRI	80+
Beam angle	COB lens 10°,15°, 24°,36°, 60°
Dimension	Ø64x75mm (Diameter x Height)
Cut out	/mm
Net weight	0.35 kgs
Warranty	3 years as standard, 5 years as options
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100-240V
Insulation class	Class I
Cable	1PC rubber cable 0.15M H05RN-F 3x1 mm square

Construction Data	
IP rating	IP65 Waterproof
IK rating	IK05
Housing	Aluminium
Protection finishing	Passivated +coated painted in dark grey
Trim	Aluminium
Loading capacity	250 kgs
Gasket	Silicone gasket
Accessories	
Mounting base	base with screws
Packaging	
Inner box size	70*70*80 mm
Carton size	37.5*32*18.5 cm (40 PCS/CTN)


Dimension

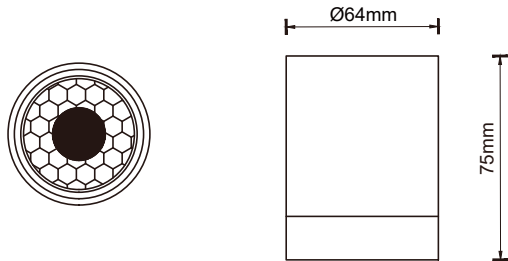

Light Distribution Curve (3000K, 36°)

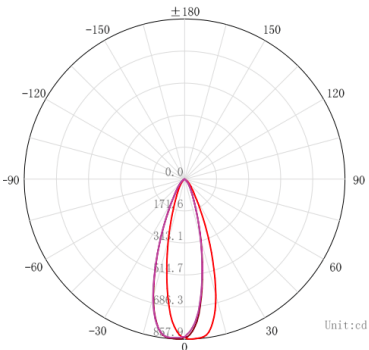

Lux distance Curve (3000K, 36°)

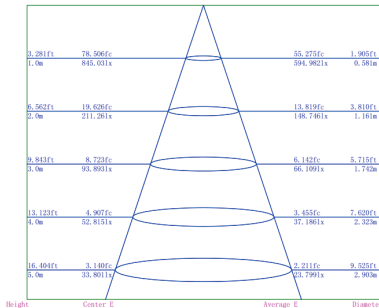

Illumination Picture (36°)



PLAYLITE®

Verona 8



IP65 IK05

3 or 5 Years Warranty


Parameter

General Data	
Item No.	DL-8W-COB-0800-BH
Power	8watts +-10%
LED type	1 PC 8W CREE CXA1304F COB LED
Luminous flux	570lm+10%
CCT	2700K/3000K/4000K/5700K/6500K
CRI	80+
Beam angle	COB lens 10°,15°, 24°,36°, 60°
Dimension	Ø70x90 mm (Diameter x Height)
Cut out	/ mm
Net weight	0.5 kgs
Warranty	3 years as standard, 5 years as options
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100-240V
Insulation class	Class I
Cable	1PC rubber cable 0.15M H05RN-F 3x1 mm square


Construction Data	
IP rating	IP65 Waterproof
IK rating	IK05
Housing	Aluminium
Protection finishing	Passivated +coated painted in dark grey
Trim	Aluminium
Loading capacity	250 kgs
Gasket	Silicone gasket
Accessories	
Mounting base	base with screws

Packaging	
Inner box size	75*75*95mm
Carton size	37.5*23.5*21.5cm (30 PCS/CTN)


Dimension

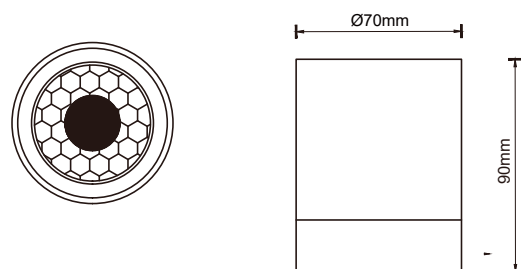

Light Distribution Curve (3000K, 36°)

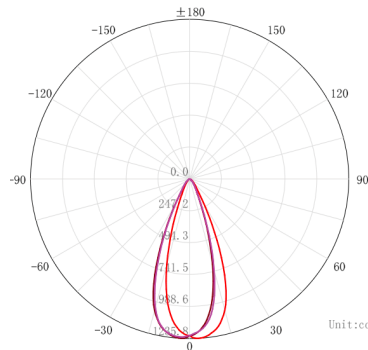

Lux distance Curve (3000K, 36°)

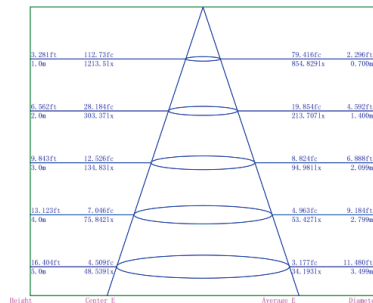


Illumination Picture (36°)




PLAYLITE® Verona 15


PLAYLITE® Verona 25

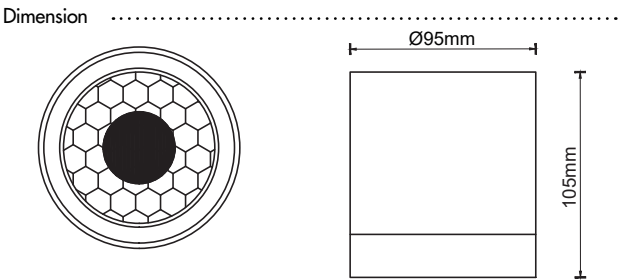

Light Distribution Curve (3000K, 15°)

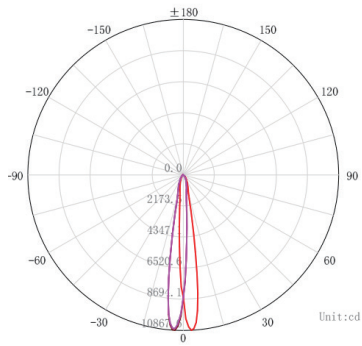

Lux distance Curve (3000K, 15°)

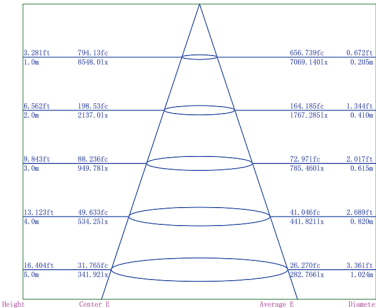


Illumination Picture (15°)




CE RoHS IP65 IK05
3 or 5 Years Warranty


Parameter	
General Data	
Item No.	DL-15W-COB-1500-BH
Power	15 watts +10%
LED type	1 PC 15W CREE CXA1512 COB LED
Luminous flux	1400lm+10%
CCT	2700K/3000K/4000K/5700K/6500K
CRI	80+
Beam angle	COB lens 10°, 15°, 24°, 36°, 60°
Dimension	Ø95x105 mm (Diameter x Height)
Cut out	/mm
Net weight	1 kgs
Warranty	3 years as standard, 5 years as options
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100-240V
Insulation class	Class I
Cable	1 PC rubber cable 0.15M H05RN-F 3x1 mm square
Construction Data	
IP rating	IP65 Waterproof
IK rating	IK05
Housing	Aluminium
Protection finishing	Passivated +coated painted in dark grey
Trim	Aluminium
Loading capacity	250 kgs
Gasket	Silicone gasket
Accessories	
Mounting base	base with screws
Packaging	
Inner box size	100*100*110mm
Carton size	32*32*13.5 cm (9 PCS/CTN)

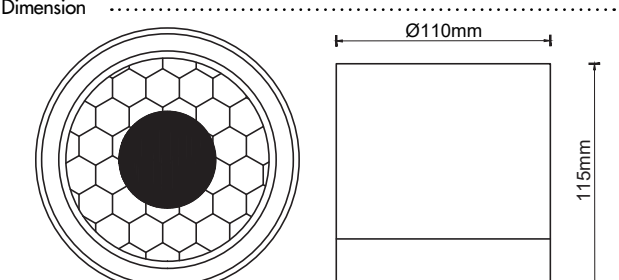

Light Distribution Curve (3000K, 36°)

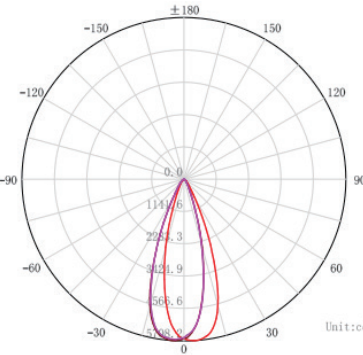

Lux distance Curve (3000K, 36°)

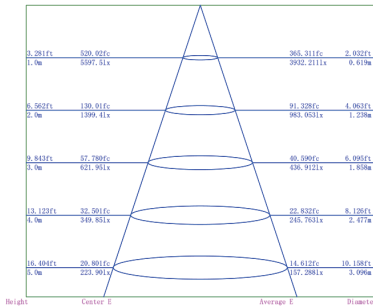

Illumination Picture (36°)



CE RoHS IP65 IK05
3 or 5 Years Warranty

Parameter	
General Data	
Item No.	DL-25W-COB-2500-BH
Power	23 watts +10%
LED type	1 PC 23W CREE CXA1816 COB LED
Luminous flux	2300lm+10%
CCT	2700K/3000K/4000K/5700K/6500K
CRI	80+
Beam angle	COB lens 10°, 15°, 24°, 36°, 60°
Dimension	Ø110x115mm (Diameter x Height)
Cut out	/ mm
Net weight	1.5 kgs
Warranty	3 years as standard, 5 years as options
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100-240V
Insulation class	Class I
Cable	1 PC rubber cable 0.15M H05RN-F 3x1 mm square
Construction Data	
IP rating	IP65 Waterproof
IK rating	IK05
Housing	Aluminium
Protection finishing	Passivated +coated painted in dark grey
Trim	Aluminium
Loading capacity	250 kgs
Gasket	Silicone gasket
Accessories	
Mounting base	base with screws
Packaging	
Inner box size	115*115*120mm
Carton size	37*37*14.5cm (9 PCS/CTN)