

Moon 3SU
LL-3W-COB-0300-MH-S

-  IP65
-  IK04
-  Class III
-  CE certification
-  ETL certification
-  SALT SPRAY TESTED (over 1000 hours)
-  Net Weight 0.32kgs
-  PVC cable 1M 2*20#
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  3 or 5 Years Warranty



Passivated+Painted available colour for housing:



• General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
3 Watt	240 lm	2700K 3000K 4000K 6000K	15°, 24°, 36°, 60° or zoomable 20°-50°	AC12V as standard (AC100-245V 50/60Hz optional)	Aluminium	Aluminium in coffee silver as standard or dark grey, Black, white

• Dimension



• Accessories

Suspended part (Customers need to buy the steel rope at local market)

Shield 03



Included



Optional



Moon 8P
LL-8W-COB-0800-MH


- IP65
- IK04
- Class III
- CE certification
- ETL certification
- SALT SPRAY TESTED (over 1000 hours)
- Net Weight 0.45kgs with 500mm pole and spike
- PVC cable 1M 2*20#
- CREE COB LED
- SDCM<5
- Ra ≥ 80
- 3 or 5 Years Warranty



General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
8 Watt	540 lm	2700K 3000K 4000K 6000K	10°, 15°, 24°, 36°, 60°	AC12V as standard (AC100-245V 50/60Hz optional)	Aluminium	Aluminium in coffee silver as standard or dark grey, Black, white

Dimension

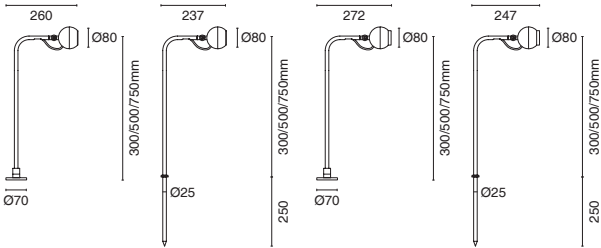

500mm pole as standard, 300mm, 750mm pole as options



Accessories

Spike-250



Optional

Round base 70



Optional

Shield 03



Optional

Moon 8SU
LL-8W-COB-0800-MH-S


- IP65
- IK04
- Class III
- CE certification
- ETL certification
- SALT SPRAY TESTED (over 1000 hours)
- Net Weight 0.42kgs
- PVC cable 1M 2*20#
- CREE COB LED
- SDCM<5
- Ra ≥ 80
- 3 or 5 Years Warranty



General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
8 Watt	540 lm	2700K 3000K 4000K 6000K	10°, 15°, 24°, 36°, 60°	AC12V as standard (AC100-245V 50/60Hz optional)	Aluminium	Aluminium in coffee silver as standard or dark grey, Black, white

Dimension

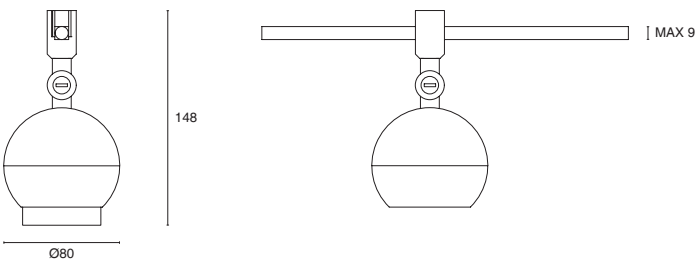

Accessories

Suspended part (Customers need to buy the steel rope at local market)



Included

Shield 08



Optional

Moon Zoom8SUF
LL-8W-COB-0800-MH(F)-S

-  IP65
-  IK04
-  Class III
-  CE certification
-  ETL certification
-  SALT SPRAY TESTED (over 1000 hours)
-  Net Weight 0.4kgs
-  PVC cable 1M 2*20#
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  3 or 5 Years Warranty




Passivated+Painted available colour for housing:



General Data


Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
8 Watt	550 lm	2700K 3000K 4000K 6000K	Zoom 20° to 50°	AC12V as standard (AC100-245V 50/60Hz optional)	Aluminium	Aluminium in coffee silver as standard or dark grey, Black, white

Dimension

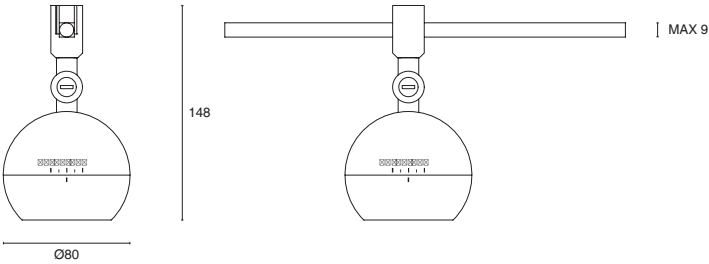

Accessories

Suspended part (Customers need to buy the steel rope at local market)

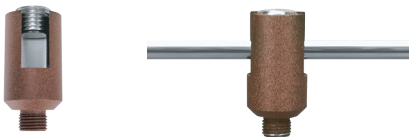

Included

