

## Q类产品规格书 >>

Specification of Various Products

**产品名称：各类铝箔易撕感应封口片**



All kinds of aluminum foil easy to tear induction sealing sheet

**产品用途：用于各类瓶盖的密封垫片**


Product Application : Sealing Liner for Various Kinds of Bottle Caps

**产品组成部分：**


Product Components :

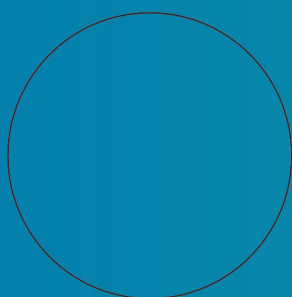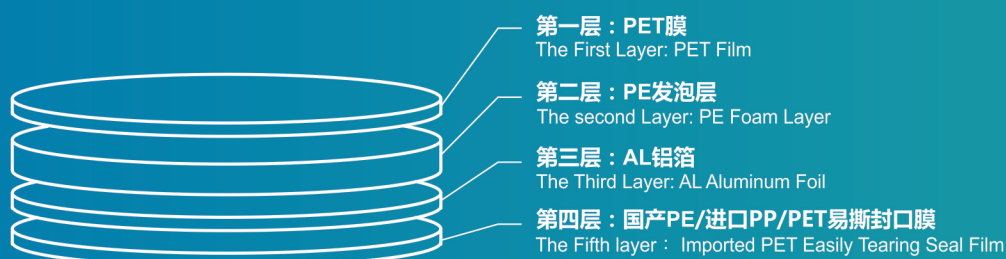

国产PE感应易撕封口膜

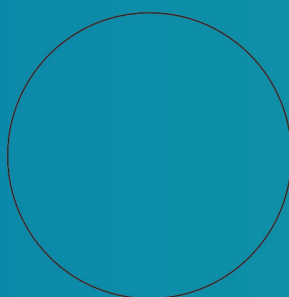

进口PP感应易撕封口膜

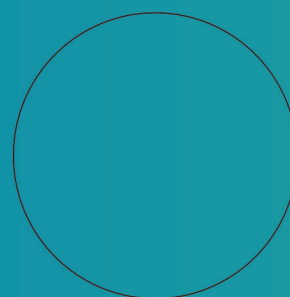

进口PET感应易撕封口膜

### 组成部分

第一层 PET膜	颜色：透明，厚度：1.2丝 特点：耐温性120-150度
第二层 <2发泡层	颜色：乳白色 厚度：10丝\$18丝 特点：微发泡，柔软有弹性
第三层 A8铝箔	颜色：银色，厚度：1.2丝 特点：传热快瞬间产生热量，无味、无毒、无臭，具有优良的阻隔性，防潮性好
第四层 国产<2&进口<<&<2@ 易撕封口膜	颜色：半透明，厚度：5丝 特点：易撕耐温80-90度
使用方式	1、将PT易撕面紧贴瓶口，再通过感应机封口。 2、将乳白色面嵌入瓶盖内，PT易撕面向外，再拧紧瓶口通过感应机封口。

### COMPONENTS

The First Layer PET Film	Colour:Transparent Thickness:0.012mm Sepcialty:Thermal Endurance 120°-150°
The Second Layer PE Foam Layer	Colour:Milk White Thickness:0.10-0.18mm Specialty:Micro-foaming,Soft and Flexible
The Third Layer AL Aluminum Foil	Clour:Silvery Thickness:0.012mm Specialty: High Heat Conductivity,Generate Heat Instantaneously, Inodorously,Atoxic,Good Barrier Resistance and Moisture Resistance
The Fourth Layer Homemade PE/ Imported PP/PET Easy to Tear Sealing Film	Colour:Semi-transparent Thickness:0.05mm Specialty:Easy to tear, Thermal Endurance 80°-90°
The Way of Usage	1、Stick the surface of the PE easy to tear film to the rim of bottle mouth tightly,then seal through the induction machine 2、Inset the liner into the bottle cap with the milk white surface inward and the PE easy to tear film's surface outward,close tightly,then seal through the induction machine