



## 各类产品规格书 >>

Specification of Various Prouducts

**产品名称：玻璃瓶感应封口易撕膜30丝左右**




**Product Name：Glass bottle induction seal tearing film (Around 0.3mm)**

**产品用途：用于各类瓶盖的密封垫片**

**Product Application：Sealing Liner for Various Kinds of Bottle Caps**

**产品组成部分：**

**Product Components：**

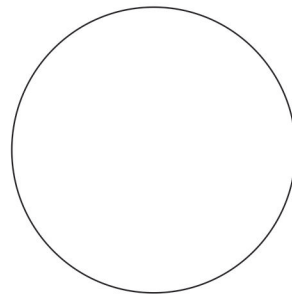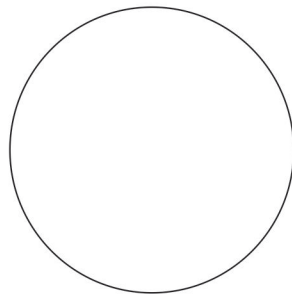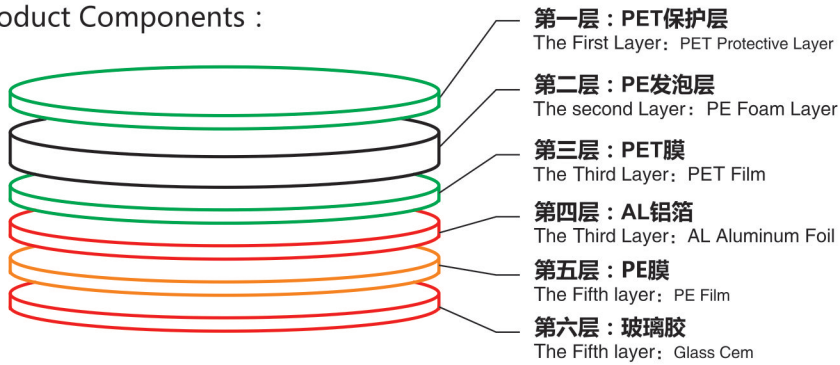

### 组成部分

第一层 PE&保护层	颜色：透明，厚度：1.2丝 特点：耐高温120-150度
第二层 PE发泡层	颜色：乳白色 厚度：15丝 特点：微发泡，柔软有弹性
第三层 PE&膜	颜色：透明，厚度：1.2丝 特点：耐高温120-150度
第四层 AL铝箔	颜色：银色，厚度：2丝 特点：传热快瞬间产生热量，无味、无毒、无臭，具有优良的阻隔性，防潮性好
第五层 PE膜	颜色：半透明 厚度：3丝
第六层 玻璃胶	玻璃胶涂层，材质：EVA材质 颜色：半透明，厚度：6丝-8丝
使用方式	1、将玻璃胶面紧贴瓶口，再通过感应机封口。
	2、将乳白色面嵌入瓶盖内，玻璃胶向外，再拧紧瓶口通过感应机封口。

### COMPONENTS

The First Layer PET Protective Layer	Colour:Transparent Thickness:0.012mm Sepcialty:Thermal Endurance 120°-150°
The Second Layer PE Foam Layer	Colour:Milk White Thickness:0.15mm Specialty:Micro-foaming,Soft and Flexible
The Third Layer PET Film	Colour:Transparent Thickness:0.012mm Sepcialty:Thermal Endurance 120°-150°
The Fourth Layer AL Aluminum Foi	Clour:Silvery Thickness:0.02mm Specialty: High Heat Conductivity,Generate Heat Instantaneously, Inodorou,Atoxic,Good Barrier Resistance and Moisture Resistance
The Fifth Layer PE Film	Colour:Semi-transparent Thickness:0.03mm
The Sixth Layer Glass Cem	Glass Cement Coating,Material: EVA Colour:Semi-transparent Thickness:0.06mm -0.08mm
&he Way of Usage	1、Stick the surface of glass cement layer to the rim of bottle mouth tightly, then seal through the induction machine
	2、Inset the liner into the bottle cap with the milk white surface inward and the glass cement layer's surface outward, close tightly,then seal through the induction machine