



XINXIA PRODUCT DATA SHEET

I. Basic data


Material: PE aluminum foil cardboard induction sealing sheet

Process: Multi-layer composite

Color: Silver

Specification: $\phi 82\text{mm}; \phi 66\text{mm}$

II. Composition of gaskets

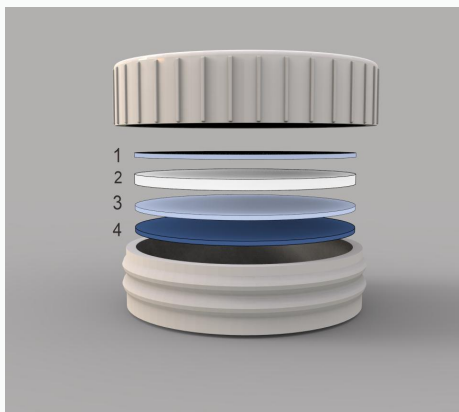

Section	Material	Thickness
1	Cardboard	/ mm
2	PET film	0.012 mm
3	AL aluminum foil	0.012mm
4	PE film	0.005mm

III. Multilevel data

- 1.把垫片放进瓶盖里面；
Put the seal liner in the bottle cap,
- 2.根据瓶盖的大小调整电磁感应机的温度（秒数），垫片通过感应达到封口作用（金属盖除外）；
也可以通过热封；
According the bottle cap's size to adjust corresponding sealing emperature of induction machine,the seal liner through the heating induction achueved sealing effect.(Except metal bottle caps).Also can heat sealing.
- 3.等瓶盖上的温度冷却之后再打开瓶盖，铝箔粘合在瓶口上。
Opening the bottle when the temperature of bottle cap is cooling.The seal liner will be stick on bottle.

新夏塑料包装有限公司

Xinxia Plastic Packaging Co., Ltd.

地址：江苏省昆山市石孟路169号正源创汇科技产业园6号厂房

Plant No. 6, Zhengyuan Chuanghui Science and Technology Industrial Park, No. 169 Shitmeng Road, Kunshan City, Jiangsu Province

浙江省绍兴市越城区沥海工业园区城东路3-5号

No. 3-5, Chengdong Road, Lihai Industrial Park, Yuecheng District, Shaoxing City, Zhejiang Province