



XINXIA PRODUCT DATA SHEET

I. Basic data


Material: PE physical foaming(300 times)

Process: Chemical low foaming,back glue

Color: White

Specification: / mm

II. Composition of gaskets

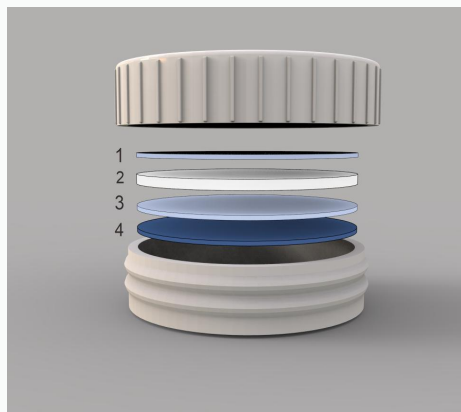

Section	Material	Thickness
1	PE film	0.05mm
2	300 times base material	1.00 mm
3	PE film	0.05mm
4	Double sided glue	0.08mm

III. Multilevel data

Appearance: Visually white, no burrs, no obvious black spots, smooth incision

Size: vernier caliper, $\phi / \pm 0.2\text{mm}$ Thickness: vernier caliper: Thickness $1.0 \pm 0.2-0.1\text{mm}$

Fluorescence agent: None

Hardness: (Shore hardness) 70 ± 5

Features: With non-toxic, tasteless, odorless, independent bubble characteristics, with pearl luster

light weight, rich slow elasticity, oil resistance, with excellent vacuum property.

新夏塑料包装有限公司

Xinxia Plastic Packaging Co., Ltd.

地址: 江苏省昆山市石孟路169号正源创汇科技产业园6号厂房

Plant No. 6, Zhengyuan Chuanghui Science and Technology Industrial Park, No. 169 Shitmeng Road, Kunshan City, Jiangsu Province

浙江省绍兴市越城区沥海工业园区城东路3-5号

No. 3-5, Chengdong Road, Lihai Industrial Park, Yuecheng District, Shaoxing City, Zhejiang Province