



蓝天滤材
LAN TIAN LV CAI



蓝天滤材
LAN TIAN LV CAI



**LANTIAN
INDUSTRIAL
FILTER PAPER**

XINJI LANTIAN FILTER MATERIAL FACTORY

Add: Xinji Xiaoxinzhuang Township Xiaozhang Village
Tel: 8613784391136 email: lt@lantianfm.com



COMPANY PROFILE ABOUT US

Our company located in North of Xinji City, Xiaozhang Development Area in Xiaoxinzhuan Town. We are built in 2002 and cover an area of 23000 square meters.

We are continuously developing our technology and structure step by step from the day we set up. We insist the way of cycle development and insist to always be honest and to make things better. Our company already established a high-quality technical development team. Our product' s' quality already reached the high international level and get favorable comment from all our customers. Our products spread all over of our country and also are exported aboard.

In the next years, on base of our high-level technology and advanced equipment, we will make our products to be a well-known national brand, not only on the quantity and quality, but also on the technical innovation and after-sales service.






INDUSTRIAL FILTER PAPER

Features

- The filter paper can separate impurity particles from the liquid and extend engine and auto service life.
- High filtration efficiency. 98% filtration efficiency of 4 μm particles and 99% filtration efficiency of 6 μm particles.
- Up to 800 L/m²/s air permeability.
- Oil filter paper can withstand up to 600 kPa pressure.
- Up to 70 mN/m high stiffness of cured filter paper.

AIR, OIL AND FUEL FILTER ELEMENTS OF HEAVY TRUCKS

AIR, OIL AND FUEL FILTER ELEMENTS OF AUTO

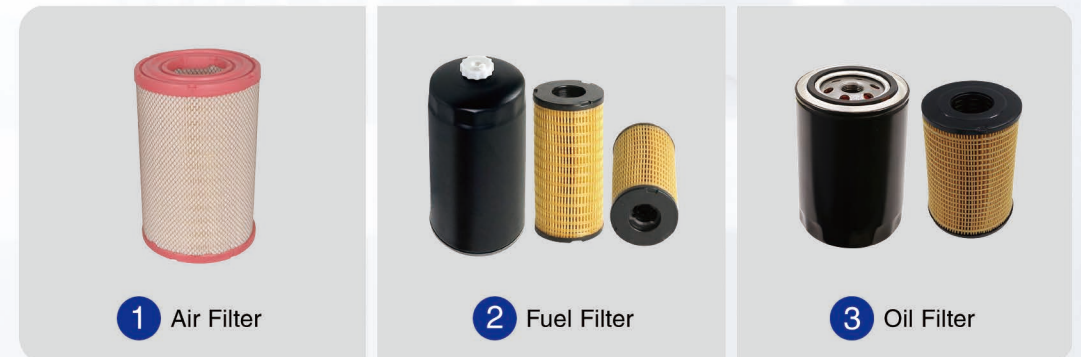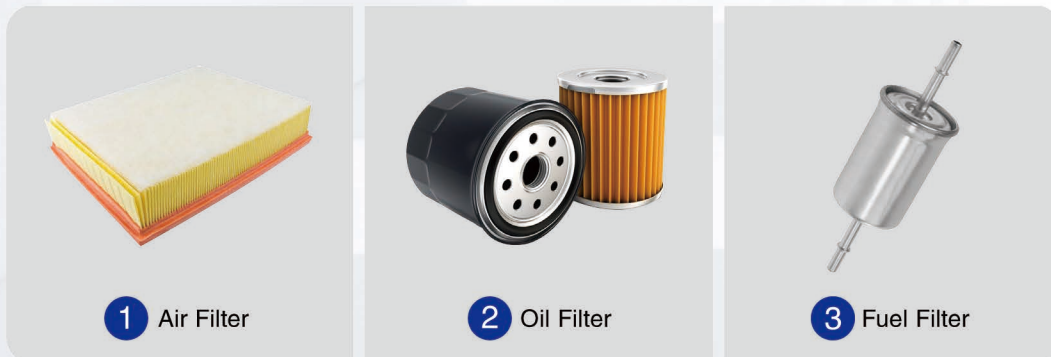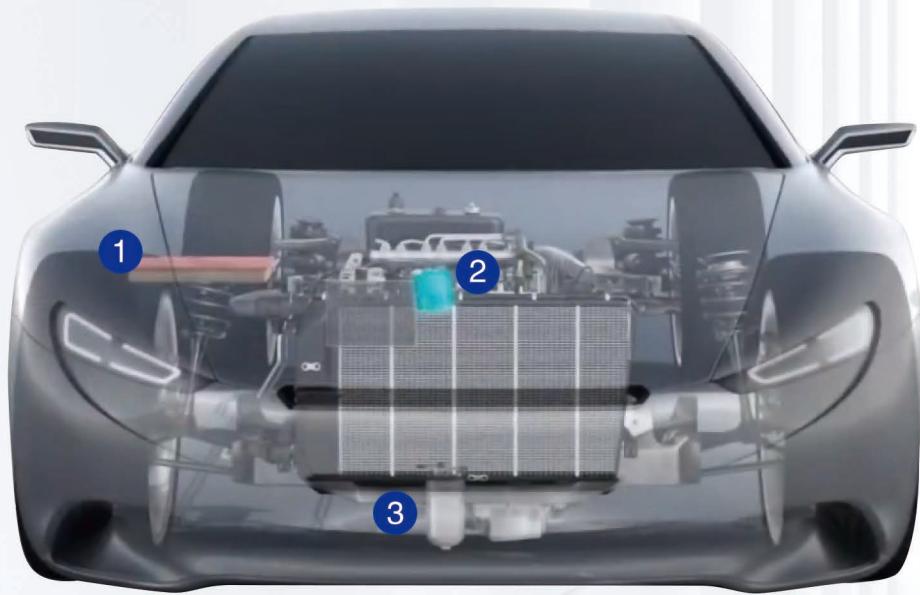

LWK-115-160HD

产品名称 product name	应用车型 heavy duty air filter paper		规格型号 specifications
检验项目 Test item	单位 Unit	检验标准 Test standard	产品标准 Product standards
定量 Grammage	g/m ²	GB/T451.2-2002	115 ± 5
透气度 Air Permeability	△=200pa L/m ² ·s	QB/T-2006	160 ± 20
瓦楞深度 Corrugation Depth	mm	GB/T451.3-2002	0.45 ± 0.05
厚度 Thickness	mm	GB/T451.3-2002	0.68 ± 0.03
耐破度 Burst Strength	kpa	GB/T454-2002	350 ± 50
纵向挺度 Stiffness	mn·m	GB/T2679.3-1996	6.5 ± 0.5
最大孔径 Max pore size	μ m	QC/T794-2007	39 ± 3
平均孔径 Mean pore size	μ m	QC/T794-2007	37 ± 3
颜色 color			G
Note: color, size and each specification parameter can be changed as per customer' s requirement.			

LWK-115-190HD

产品名称 product name	应用车型 heavy duty air filter paper		规格型号 specifications
检验项目 Test item	单位 Unit	检验标准 Test standard	产品标准 Product standards
定量 Grammage	g/m ²	GB/T451.2-2002	115 ± 5
透气度 Air Permeability	△=200pa L/m ² ·s	QB/T-2006	190 ± 20
瓦楞深度 Corrugation Depth	mm	GB/T451.3-2002	0.45 ± 0.05
厚度 Thickness	mm	GB/T451.3-2002	0.60 ± 0.03
耐破度 Burst Strength	kpa	GB/T454-2002	330 ± 50
纵向挺度 Stiffness	mn·m	GB/T2679.3-1996	6.5 ± 0.5
最大孔径 Max pore size	μ m	QC/T794-2007	42 ± 3
平均孔径 Mean pore size	μ m	QC/T794-2007	40 ± 3
颜色 color			Y
Note: color, size and each specification parameter can be changed as per customer' s requirement.			

LWK-115-180HD

产品名称 product name	应用车型 heavy duty air filter paper		规格型号 specifications
检验项目 Test item	单位 Unit	检验标准 Test standard	产品标准 Product standards
定量 Grammage	g/m ²	GB/T451.2-2002	115 ± 5
透气度 Air Permeability	△=200pa L/m ² •s	QB/T-2006	180 ± 20
瓦楞深度 Corrugation Depth	mm	GB/T451.3-2002	0.45 ± 0.05
厚度 Thickness	mm	GB/T451.3-2002	0.68 ± 0.03
耐破度 Burst Strength	kpa	GB/T454-2002	350 ± 50
纵向挺度 Stiffness	mn•m	GB/T2679.3-1996	6.5 ± 0.5
最大孔径 Max pore size	μ m	QC/T794-2007	42 ± 3
平均孔径 Mean pore size	μ m	QC/T794-2007	40 ± 3
颜色 color			B
Note: color, size and each specification parameter can be changed as per customer' s requirement.			

LWK-135-210HDE

产品名称 product name	应用车型 heavy duty air filter paper		规格型号 specifications
检验项目 Test item	单位 Unit	检验标准 Test standard	产品标准 Product standards
定量 Grammage	g/m ²	GB/T451.2-2002	135 ± 5
透气度 Air Permeability	△=200pa L/m ² •s	QB/T-2006	210 ± 30
瓦楞深度 Corrugation Depth	mm	GB/T451.3-2002	0.45 ± 0.05
厚度 Thickness	mm	GB/T451.3-2002	0.60 ± 0.05
耐破度 Burst Strength	kpa	GB/T454-2002	280 ± 50
纵向挺度 Stiffness	mn•m	GB/T2679.3-1996	6.8 ± 0.5
最大孔径 Max pore size	μ m	QC/T794-2007	45 ± 5
平均孔径 Mean pore size	μ m	QC/T794-2007	43 ± 5
颜色 color			G
Note: color, size and each specification parameter can be changed as per customer' s requirement.			

LWK-130-300HDL

产品名称 product name	应用车型 heavy duty air filter paper		规格型号 specifications
检验项目 Test item	单位 Unit	检验标准 Test standard	产品标准 Product standards
定量 Grammage	g/m ²	GB/T451.2-2002	130 ± 5
透气度 Air Permeability	△=200pa L/m ² ·s	QB/T-2006	300 ± 50
瓦楞深度 Corrugation Depth	mm	GB/T451.3-2002	0.40 ± 0.05
厚度 Thickness	mm	GB/T451.3-2002	0.58 ± 0.05
耐破度 Burst Strength	kpa	GB/T454-2002	230 ± 30
纵向挺度 Stiffness	mn·m	GB/T2679.3-1996	6.0 ± 0.5
最大孔径 Max pore size	μ m	QC/T794-2007	70 ± 5
平均孔径 Mean pore size	μ m	QC/T794-2007	65 ± 5
颜色 color			G

Note: color, size and each specification parameter can be changed as per customer' s requirement.

LWK-135-280INF

产品名称 product name	应用车型 heavy duty air filter paper		规格型号 specifications
检验项目 Test item	单位 Unit	检验标准 Test standard	产品标准 Product standards
定量 Grammage	g/m ²	GB/T451.2-2002	135 ± 5
透气度 Air Permeability	△=200pa L/m ² ·s	QB/T-2006	280 ± 30
瓦楞深度 Corrugation Depth	mm	GB/T451.3-2002	0.30 ± 0.05
厚度 Thickness	mm	GB/T451.3-2002	0.75 ± 0.03
耐破度 Burst Strength	kpa	GB/T454-2002	280 ± 50
纵向挺度 Stiffness	mn·m	GB/T2679.3-1996	5.5 ± 0.5
最大孔径 Max pore size	μ m	QC/T794-2007	58 ± 5
平均孔径 Mean pore size	μ m	QC/T794-2007	55 ± 5
颜色 color			B

Note: color, size and each specification parameter can be changed as per customer' s requirement.

LWK-115-130ENM

产品名称 product name	应用车型 heavy duty air filter paper		规格型号 specifications
检验项目 Test item	单位 Unit	检验标准 Test standard	产品标准 Product standards
定量 Grammage	g/m ²	GB/T451.2-2002	115 ± 5
透气度 Air Permeability	△=200pa L/m ² ·s	QB/T-2006	130 ± 20
瓦楞深度 Corrugation Depth	mm	GB/T451.3-2002	0.45 ± 0.05
厚度 Thickness	mm	GB/T451.3-2002	0.68 ± 0.03
耐破度 Burst Strength	kpa	GB/T454-2002	380 ± 50
纵向挺度 Stiffness	mn·m	GB/T2679.3-1996	7.0 ± 0.5
最大孔径 Max pore size	μ m	QC/T794-2007	35 ± 5
平均孔径 Mean pore size	μ m	QC/T794-2007	33 ± 5
颜色 color			W
Note: color, size and each specification parameter can be changed as per customer' s requirement.			

LPK-95-200HO

产品名称 product name	应用车型 heavy duty air filter paper		规格型号 specifications
检验项目 Test item	单位 Unit	检验标准 Test standard	产品标准 Product standards
定量 Grammage	g/m ²	GB/T451.2-2002	95 ± 5
透气度 Air Permeability	△=200pa L/m ² ·s	QB/T-2006	200 ± 30
瓦楞深度 Corrugation Depth	mm	GB/T451.3-2002	plain
厚度 Thickness	mm	GB/T451.3-2002	0.35 ± 0.03
耐破度 Burst Strength	kpa	GB/T454-2002	250 ± 30
纵向挺度 Stiffness	mn·m	GB/T2679.3-1996	4.0 ± 0.5
最大孔径 Max pore size	μ m	QC/T794-2007	55 ± 5
平均孔径 Mean pore size	μ m	QC/T794-2007	50 ± 5
颜色 color			B
Note: color, size and each specification parameter can be changed as per customer' s requirement.			

LPK-95-220NH

产品名称 product name	应用车型 heavy duty air filter paper		规格型号 specifications
检验项目 Test item	单位 Unit	检验标准 Test standard	产品标准 Product standards
定量 Grammage	g/m ²	GB/T451.2-2002	95 ± 5
透气度 Air Permeability	△=200pa L/m ² •s	QB/T-2006	220 ± 30
瓦楞深度 Corrugation Depth	mm	GB/T451.3-2002	plain
厚度 Thickness	mm	GB/T451.3-2002	0.35 ± 0.03
耐破度 Burst Strength	kpa	GB/T454-2002	280 ± 50
纵向挺度 Stiffness	mn•m	GB/T2679.3-1996	4.5 ± 0.5
最大孔径 Max pore size	μ m	QC/T794-2007	41 ± 3
平均孔径 Mean pore size	μ m	QC/T794-2007	40 ± 3
颜色 color			W
Note: color, size and each specification parameter can be changed as per customer' s requirement.			

LPK-115-650HDI

产品名称 product name	应用车型 heavy duty air filter paper		规格型号 specifications
检验项目 Test item	单位 Unit	检验标准 Test standard	产品标准 Product standards
定量 Grammage	g/m ²	GB/T451.2-2002	115 ± 5
透气度 Air Permeability	△=200pa L/m ² •s	QB/T-2006	650 ± 50
瓦楞深度 Corrugation Depth	mm	GB/T451.3-2002	plain
厚度 Thickness	mm	GB/T451.3-2002	0.50 ± 0.03
耐破度 Burst Strength	kpa	GB/T454-2002	300 ± 50
纵向挺度 Stiffness	mn•m	GB/T2679.3-1996	5.0 ± 0.5
最大孔径 Max pore size	μ m	QC/T794-2007	98 ± 10
平均孔径 Mean pore size	μ m	QC/T794-2007	97 ± 10
颜色 color			W
Note: color, size and each specification parameter can be changed as per customer' s requirement.			

LPK-115-300HDL

产品名称 product name	应用车型 heavy duty air filter paper		规格型号 specifications
检验项目 Test item	单位 Unit	检验标准 Test standard	产品标准 Product standards
定量 Grammage	g/m ²	GB/T451.2-2002	115 ± 5
透气度 Air Permeability	△=200pa L/m ² ·s	QB/T-2006	300 ± 50
瓦楞深度 Corrugation Depth	mm	GB/T451.3-2002	plain
厚度 Thickness	mm	GB/T451.3-2002	0.35 ± 0.05
耐破度 Burst Strength	kpa	GB/T454-2002	200 ± 30
纵向挺度 Stiffness	mn·m	GB/T2679.3-1996	4.0 ± 0.5
最大孔径 Max pore size	μ m	QC/T794-2007	75 ± 5
平均孔径 Mean pore size	μ m	QC/T794-2007	70 ± 5
颜色 color			R
Note: color, size and each specification parameter can be changed as per customer' s requirement.			

LPK-130-250HDE

产品名称 product name	应用车型 heavy duty air filter paper		规格型号 specifications
检验项目 Test item	单位 Unit	检验标准 Test standard	产品标准 Product standards
定量 Grammage	g/m ²	GB/T451.2-2002	130 ± 5
透气度 Air Permeability	△=200pa L/m ² ·s	QB/T-2006	250 ± 5
瓦楞深度 Corrugation Depth	mm	GB/T451.3-2002	—
厚度 Thickness	mm	GB/T451.3-2002	0.55 ± 0.05
耐破度 Burst Strength	kpa	GB/T454-2002	250 ± 50
纵向挺度 Stiffness	mn·m	GB/T2679.3-1996	4.0 ± 0.5
最大孔径 Max pore size	μ m	QC/T794-2007	48 ± 5
平均孔径 Mean pore size	μ m	QC/T794-2007	45 ± 5
颜色 color			W
Note: color, size and each specification parameter can be changed as per customer' s requirement.			

LPK-140-300NA

产品名称 product name	应用车型 heavy duty air filter paper		规格型号 specifications
检验项目 Test item	单位 Unit	检验标准 Test standard	产品标准 Product standards
定量 Grammage	g/m ²	GB/T451.2-2002	140 ± 5
透气度 Air Permeability	△=200pa L/m ² ·s	QB/T-2006	300 ± 50
瓦楞深度 Corrugation Depth	mm	GB/T451.3-2002	plain
厚度 Thickness	mm	GB/T451.3-2002	0.55 ± 0.03
耐破度 Burst Strength	kpa	GB/T454-2002	300 ± 50
纵向挺度 Stiffness	mn·m	GB/T2679.3-1996	6.5 ± 0.5
最大孔径 Max pore size	μ m	QC/T794-2007	43 ± 5
平均孔径 Mean pore size	μ m	QC/T794-2007	42 ± 5
颜色 color			B
Note: color, size and each specification parameter can be changed as per customer' s requirement.			

LPLK-130-250

产品名称 product name	应用车型 light car air filter paper		规格型号 specifications
检验项目 Test item	单位 Unit	检验标准 Test standard	产品标准 Product standards
定量 Grammage	g/m ²	GB/T451.2-2002	130 ± 5
透气度 Air Permeability	△=200pa L/m ² ·s	QB/T-2006	250 ± 5
瓦楞深度 Corrugation Depth	mm	GB/T451.3-2002	—
厚度 Thickness	mm	GB/T451.3-2002	0.55 ± 0.05
耐破度 Burst Strength	kpa	GB/T454-2002	250 ± 50
纵向挺度 Stiffness	mn·m	GB/T2679.3-1996	4.0 ± 0.5
最大孔径 Max pore size	μ m	QC/T794-2007	48 ± 5
平均孔径 Mean pore size	μ m	QC/T794-2007	45 ± 5
颜色 color			R
Note: color, size and each specification parameter can be changed as per customer' s requirement.			

LPLK-130-380

产品名称 product name	应用车型 light car air filter paper		规格型号 specifications
检验项目 Test item	单位 Unit	检验标准 Test standard	产品标准 Product standards
定量 Grammage	g/m ²	GB/T451.2-2002	130 ± 5
透气度 Air Permeability	△=200pa L/m ² ·s	QB/T-2006	380 ± 50
瓦楞深度 Corrugation Depth	mm	GB/T451.3-2002	plain
厚度 Thickness	mm	GB/T451.3-2002	0.40 ± 0.05
耐破度 Burst Strength	kpa	GB/T454-2002	280 ± 30
纵向挺度 Stiffness	mn·m	GB/T2679.3-1996	5.0 ± 0.5
最大孔径 Max pore size	μ m	QC/T794-2007	90 ± 5
平均孔径 Mean pore size	μ m	QC/T794-2007	85 ± 5
颜色 color			B
Note: color, size and each specification parameter can be changed as per customer' s requirement.			

LPLK-130-330

产品名称 product name	应用车型 light car air filter paper		规格型号 specifications
检验项目 Test item	单位 Unit	检验标准 Test standard	产品标准 Product standards
定量 Grammage	g/m ²	GB/T451.2-2002	130 ± 5
透气度 Air Permeability	△=200pa L/m ² ·s	QB/T-2006	330 ± 50
瓦楞深度 Corrugation Depth	mm	GB/T451.3-2002	plain
厚度 Thickness	mm	GB/T451.3-2002	0.35 ± 0.05
耐破度 Burst Strength	kpa	GB/T454-2002	200 ± 30
纵向挺度 Stiffness	mn·m	GB/T2679.3-1996	4.0 ± 0.5
最大孔径 Max pore size	μ m	QC/T794-2007	85 ± 5
平均孔径 Mean pore size	μ m	QC/T794-2007	80 ± 5
颜色 color			R
Note: color, size and each specification parameter can be changed as per customer' s requirement.			

LPLK-130-400

产品名称 product name	应用车型 light car air filter paper		规格型号 specifications
检验项目 Test item	单位 Unit	检验标准 Test standard	产品标准 Product standards
定量 Grammage	g/m ²	GB/T451.2-2002	130 ± 5
透气度 Air Permeability	△=200pa L/m ² ·s	QB/T-2006	400 ± 50
瓦楞深度 Corrugation Depth	mm	GB/T451.3-2002	plain
厚度 Thickness	mm	GB/T451.3-2002	0.43 ± 0.05
耐破度 Burst Strength	kpa	GB/T454-2002	280 ± 30
纵向挺度 Stiffness	mn·m	GB/T2679.3-1996	6.0 ± 0.5
最大孔径 Max pore size	μ m	QC/T794-2007	90 ± 5
平均孔径 Mean pore size	μ m	QC/T794-2007	87 ± 5
颜色 color			Y
Note: color, size and each specification parameter can be changed as per customer' s requirement.			

LPC-200-150HDF

产品名称 product name	应用车型 heavy duty air filter paper		规格型号 specifications
检验项目 Test item	单位 Unit	检验标准 Test standard	产品标准 Product standards
定量 Grammage	g/m ²	GB/T451.2-2002	200 ± 10
透气度 Air Permeability	△=200pa L/m ² ·s	QB/T-2006	150 ± 30
瓦楞深度 Corrugation Depth	mm	GB/T451.3-2002	plain
厚度 Thickness	mm	GB/T451.3-2002	0.80 ± 0.05
耐破度 Burst Strength	kpa	GB/T454-2002	500 ± 50
纵向挺度 Stiffness	mn·m	GB/T2679.3-1996	25 ± 7
最大孔径 Max pore size	μ m	QC/T794-2007	40 ± 3
平均孔径 Mean pore size	μ m	QC/T794-2007	38 ± 3
颜色 color			W
Note: color, size and each specification parameter can be changed as per customer' s requirement.			