诺恒气动

诺恒气动2020产品手册

2020PRODUCT CATELOG

关于诺恒气动/公司简介 About NUOHENG

诸暨诺恒气动机械有限公司是一家集设计，制造，营销与服务为一体的规模化企业，专业生产金属快插，金属快拧，金属卡套系列以及产品，为客户提供优质、创新的气动元件连接方案。

本企业拥有先进的自动化生产技术以及高精密度的数控设备，完善的组织机构和高素质的专业技术人员，以及整套完整的检测设备，生产符合行业标准的优质产品远销全国各地以及出口欧美等国家，以诚信、实力、产品质量和优质的服务获得业界认可。

公司秉持着合作共赢、诚信为本，注重品质、塑造品牌的经营理念，欢迎各界人士及广大客商前来公司参观洽谈!

NUOHENG pneumatic machinery Co.,Ltd is a engineering and design company,manufacturing metal push in fittings,push on fittings,compression fitting and other general brass pipe fittings,providing high quality,innovative solution for tube connection.

Regarding quality and service as the source of enterprise survival,NUOHENG has advanced automation production technology including high-precision CNC equipment,full set of testing equipment and high-quality professional personnel.

We hope to build a mutual benefit and win-win cooperation with customers and every clients are welcomed for visiting to learn more about our products and service.

Quality success brand, technology create future.



诺恒气动

目 录 CONTENT

全铜镀镍快插式接头产品介绍

诺恒气动

特点/Characteristic

◆全铜镀镍快插式接头可与 PA、PU 气管配合使用于各种气动管类系统。

Nickle-plated full brass push in fittings are widely used in pneumatic system with PA,PU pipes.

◆全自动数控加工处理采用新型结构耐油密封圈，插拔更容易。

Automatic numerical control processing,with a new structure and oil sealing ring simplifies the insertion and removal of pipes.

◆安装快捷，外形美观，节省空间。

Quick installation,attractive appearance,space-saving.

◆可旋转螺纹体可以360度自由转动，使用方便。

Rotatable thread body makes connect direction is available at 360 °after installation.

产品结构/Structure





产品参数/Specifications

使用流体/Fluid	空气、水（有条件）/Air,Water(conditional)
工作压力范围/Operating pressure	0.095-2.5Mpa
保证耐压力/Negative pressure	1.6Mpa
工作温度范围/Working temperature	-30-120℃ 注：要求更高温度可以更换密封圈材质（the material of gasket ring can be changed if higher temperature required）

型号说明/Model description

A01NPC	8	-	01
系列号	气管外径		螺纹规格
Series code	Tube size		thread

气管外径/Tube diameter

公制尺寸/Metric Size							
代码code	4	6	8	10	12	14	16
直径 DIA	4mm	6mm	8mm	10mm	12mm	14mm	16mm

螺纹规格/thread size

55° 锥管螺纹/55° taper thread size					
代码/code	01	02	03	04	06
型号/Size	R1/8	R1/4	R3/8	R1/2	R3/4

	公制螺纹/Metric Size			55° 直管螺纹/55° G Thread			
代码/code	M5	M6	M8	G01	G02	G03	G04
型号/Size	M5*0.8	M6*1.0	M8*1.25	G1/8	G1/4	G3/8	G1/2

美制螺纹/American Standard Taper Thread(NPT)					
代码/code	01	02	03	04	06
型号/Size	NPT1/8	NPT1/4	NPT3/8	NPT1/2	NPT3/4

全铜镀镍调速阀产品介绍

●特点/Characteristic

◆全铜镀镍调速阀可与PA、PU气管配合使用于各种气动管类系统用于控制驱动设备的运行速度。
Nickle-plated full brass speed controller is widely used in pneumatic system with PA,PU pipes for speed control of driving unit.
◆全自动数控加工处理 ，采用新型结构耐油密封圈，插拔更容易。
Automatic numerical control processing,with a new structure and oil sealing ring simplifies the insertion and removal of pipes.
◆安装快捷，外形美观，节省空间。
Quick installation,attractive appearance,space-saving.
◆安装完毕后管道方向也可360°改变
The direction of the pipe can be rotated at 360° after installation.

●产品结构/Structure

进气节流阀/Air inlet controller



出气节流阀/Air outlet controller



●产品参数/Specifications

使用流体/Fluid	空气、液体（有条件）/Air,Liquid(conditional)
工作压力范围/Operating pressure	0.1-2.5Mpa
工作温度范围/Working temperature	-30-120 ℃ 注：要求更高温度可以更换密封圈材质（the material of gasket ring can be changed if higher temperature required）

● 注意Note

全铜镀镍调速阀的设计可以允许在充分密闭位有一定程度的气体泄露，因此不要使用于不允许有气体泄露的场合。
In fully enclosed position,a few air leakage of speed controller is allowed because of the design.Please don't use in the environment required perfect none-leakage.

快插和快拧两类管接头产品安装指示

产品安装指示Tips for installing

1.快插管接头（push in fittings）

•插管前请确认管子切断面垂直，管子表面无伤痕以及管子未成椭圆形。
Before push pipe in,please make sure the section of pipe is vertical and smooth.Please also check if there is any indication of damage on the pipe and don't use elliptical pipe.
•适当力度插上气管后，拉拔一下气管确认卡箍已经自动卡紧。
Try to pull the pipe out to check if it has been inserted tightly.
•拔出管子前，请确认管子内压为零。
Please make sure the internal pressure of pipe is 0 before disconnec pipe.
•将气管内推的同时将卡爪均匀压到底，拔出管子。
Push the tube in meanwhile press the sleeve,then pull out the pipe.Please make sure the sleeve is pressed rightly or it may cause scratch and damage on the pipe.

2.快拧管接头(push on fittings)

•插管前请确认管子切断面垂直，管子表面无伤痕以及管子未成椭圆形。
Before push pipe in,please make sure the section of pipe is vertical and smooth.Please also check if there is any indication of damage on the pipe and don't use elliptical pipe.
•将气管插入后用扳手把螺帽旋紧。
Insert the pipe and tighten the nut with wrench.
•拔出管子前，请确认管子内压为零。
Please make sure the internal pressure of pipe is 0 before disconnec pipe.
•旋出螺帽，拔出管子。
Screw out the nut and pull out the pipe.

A01金属快插直通接头NPC



型号Model	L1	S1	H	S	T	D1	D2
NPC4-M5	22	2	5.5	10	M5*1	9	4
NPC4-M6	22	2	5.5	10	M6*1	9	4
NPC4-M8*1	22	2	7	10	M8*1	9	4
NPC4-10*1	23	2	7	12	M10*1	9	4
NPC4-01	23	2	7	10	R1/8	9	4
NPC4-02	24	2	9	14	R1/4	9	4
NPC6-01	25	5	7	12	R1/8	12	6
NPC6-02	25	5	9	14	R1/4	12	6
NPC6-03	22	5	10	17	R3/8	12	6
NPC6-04	22	5	11	21	R1/2	12	6
NPC8-01	28	5	7	14	R1/8	14	8
NPC8-02	28	6	9	14	R1/4	14	8
NPC8-03	22	6	10	17	R3/8	14	8
NPC8-04	22	6	11	21	R1/2	14	8
NPC10-01	30	5	7	17	R1/8	16	10
NPC10-02	31	6	9	16	R1/4	16	10
NPC10-03	31	8	10	17	R3/8	16	10
NPC10-04	25	8	11	21	R1/2	16	10
NPC12-01	30	5	7	19	R1/8	16	12
NPC12-02	32	6	9	19	R1/4	18	12
NPC12-03	31	9	10	19	R3/8	18	12
NPC12-04	25	9	11	21	R1/2	18	12
NPC14-02	30	6	9	22	R1/4	21	14
NPC14-03	31	9	10	22	R3/8	21	14
NPC14-04	33	12	11	22	R1/2	21	14
NPC14-06	38	12	13	27	R3/4	21	14
NPC16-04	35	12	11	24	R1/2	23	16
NPC16-06	38	14	13	27	R3/4	23	16

A02.直通内六角接头NPOC



型号Model	L1		H	S	T	D1	D2
NPOC4--M5	21		5.5	2	M5	9	4
NPOC4-M6	21		5.5	2	M6	9	4
NPOC4-M8	22		7	2	M8*1	9	4
NPOC4-M10	23		7	2	M10*1	9	4
NPOC4-01	23		7	2	R1/8	9	4
NPOC4-02	24		9	2	R1/8	9	4
NPOC6-01	26		7	5	R1/8	12	6
NPOC6-02	26		9	5	R1/4	12	6
NPOC6-03	25		10	5	R3/8	12	6
NPOC6-04	26		11	5	R1/2	12	6
NPOC8-01	28		7	6	R1/8	14	8
NPOC8-02	28		9	6	R1/4	14	8
NPOC8-03	26		10	6	R3/8	14	8
NPOC8-04	25		11	6	R1/2	14	8
NPOC10-01	29		7	8	R1/8	16	10
NPOC10-02	29		9	8	R1/4	16	10
NPOC10-03	26		10	8	R3/8	16	10
NPOC10-04	26		11	8	R1/2	16	10
NPOC12-01	29		7	10	R1/8	18	12
NPOC12-02	30		9	10	R1/4	18	12
NPOC12-03	26		10	10	R3/8	18	12
NPOC12-04	26		11	10	R1/2	18	12

全金属快插接头系列 适合：尼龙管，PE管，PU管

诺恒气动

A03内牙快插直通NPCF

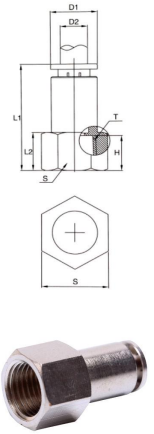

型号Model	L1	S	H	S	T	D1	D2
NPCF4-01	27	12	10		G1/8	9	4
NPCF4-02	28	16	12.5		G1/4	9	4
NPCF6-01	28	12	10		G3/8	12	6
NPCF6-02	30	16	12.5		G1/4	12	6
NPCF6-03	31	19	12		G3/8	12	6
NPCF6-04	33	24	13		G1/2	12	6
NPCF8-01	28	14	10		G1/8	14	8
NPCF8-02	30	16	12.5		G1/4	14	8
NPCF8-03	31	19	12		G3/8	14	8
NPCF8-04	33	24	13		G1/2	14	8
NPCF10-01	29	16	10		G1/8	16	10
NPCF10-02	31	16	12.5		G1/4	16	10
NPCF10-03	32	19	12		G3/8	16	10
NPCF10-04	34	24	13		G1/2	16	10
NPCF12-01	30	19	12		G1/8	18	12
NPCF12-02	32	19	12.5		G1/4	18	12
NPCF12-03	33	19	12		G3/8	18	12
NPCF12-04	35	24	13		G1/2	18	12
NPCF6-M14	30	17	13		M14*1.5	12	6
NPCF8-M14	31	17	13		M14*1.5	14	8

A04内牙直通穿板快插 NPMF

型号Model	L1	S	H	L3	T	D1	D2	M
NPMF 6 01	28	16	10		G1/8	12	6	M14*1
NPMF 6-02	29	16	11		G1/4	12	6	M14*1
NPMF 6-03	31	19	12		G3/8	12	6	M14*1
NPMF 6-04	34	24	13		G1/2	12	6	M14*1
NPMF 8-01	30	19	10		G1/8	14	8	M16*1
NPMF 8-02	32	19	11		G1/4	14	8	M16*1
NPMF 8-03	32	19	12		G3/8	14	8	M16*1
NPMF 8-04	34	24	13		G1/2	14	8	M16*1
NPMF 10-01	31	21	10		G1/8	16	10	M18*1
NPMF 10-02	33	21	11		G1/4	16	10	M18*1
NPMF 10-03	34	21	12		G3/8	16	10	M18*1
NPMF 10-04	35	24	13		G1/2	16	10	M18*1
NPMF 12-01	30	24	10		G1/8	18	12	M20*1
NPMF 12-02	34	24	11		G1/4	18	12	M20*1
NPMF 12-03	35	24	12		G3/8	18	12	M20*1
NPMF 12-04	36	24	13		G1/2	18	12	M20*1

A05万向活接快插弯头 NPL



型号Model	L1	L2	H	S	T	D1	D2
NPL4--M5	18	15	4.2	10	M5	9	4
NPL4--M6	18	16	4.2	10	M6*1	9	4
NPL4-01	18	17	7	12	ZG1/8	9	4
NPL4-02	18	19	9	14	ZG1/4	9	4
NPL6-M5	24	18	4.2	10	M5	12	6
NPL6-01	24	21	7	12	R1/8	12	6
NPL6-02	24	23	9	14	R1/4	12	6
NPL6-03	24	25	10	17	R3/8	12	6
NPL6-04	24	26	11.5	21	R1/2	12	6
NPL8-01	26	22	7	12	R1/8	14	8
NPL8-02	26	24	9	14	R1/4	14	8
NPL8-03	26	26	10	17	R3/8	14	8
NPL8-04	26	27	11.5	21	R1/2	14	8
NPL10-01	29	23	7	12	R1/8	16	10
NPL10-02	29	25	9	14	R1/4	16	10
NPL10-03	29	27	10	17	R3/8	16	10
NPL10-04	29	28	11.5	21	R1/2	16	10
NPL12-01	31	24	7	12	R1/8	18	12
NPL12-02	31	26	9	14	R1/4	18	12
NPL12-03	31	28	10	17	R3/8	18	12
NPL12-04	31	29	11.5	21	R1/2	18	12
NPL14-02	36	31	9	14	R1/4	21	14
NPL14-03	36	33	10	17	R3/8	21	14
NPL14-04	36	35	11.5	21	R1/2	21	14
NPL14-06	36	37	13	27	R3/4	21	14
NPL16-02	37	33	9	14	R1/4	23	16
NPL16-03	37	34	10	17	R3/8	23	16
NPL16-04	37	35	11.5	21	R1/2	23	16
NPL16-06	37	38	13	27	R3/8	23	16

A06内牙活接快插弯头NPLF



型号Model	L1	L2	H	S	T	D1	D2
NPLF6-01	24	21	8	14	RC1/8	12	6
NPLF6-02	24	23	9.5	16	RC1/4	12	6
NPLF6-03	24	25	11	21	RC3/8	12	6
NPLF6-04	24	26	13	24	RC1/2	12	6
NPLF8-01	26	22	8	14	RC1/8	14	8
NPLF8-02	26	24	9.5	16	RC1/4	14	8
NPLF8-03	26	26	11	21	RC3/8	14	8
NPLF8-04	26	27	13	24	RC1/2	14	8
NPLF10-01	29	23	8	14	RC1/8	16	10
NPLF10-02	29	25	9.5	16	RC1/4	16	10
NPLF10-03	29	27	11	21	RC3/8	16	10
NPLF10-04	29	28	13	24	RC1/2	16	10
NPLF12-02	31	26	9.5	16	RC1/4	18	12
NPLF12-03	31	27	11	21	RC3/8	18	12
NPLF12-04	31	28	13	24	RC1/2	18	12

全金属快插接头系列 适合：尼龙管，PE管，PU管

诺恒气动

A07活接螺纹快插三通NPB



型号Model	L1	L2	H	S	T	D1	D2
NPB4-M5	32	17	4.2	10	M5	9	4
NPB6-01	47	23	7	12	R1/8	12	6
NPB6-02	47	25	9	14	R1/4	12	6
NPB6-03	47	26	10	17	R3/8	12	6
NPB6-04	47	28	11.5	21	R1/2	12	6
NPB8-01	52	23	7	12	R1/8	14	8
NPB8-02	52	25	9	14	R1/4	14	8
NPB8-03	52	27	10	17	R3/8	14	8
NPB8-04	52	29	11.5	21	R1/2	14	8
NPB10-01	59	26	7	12	R1/8	16	10
NPB10-02	59	27	9	14	R1/4	16	10
NPB10-03	59	28	10	17	R3/8	16	10
NPB10-04	59	30	11.5	21	R1/2	16	10
NPB12-02	61	29	9	14	R1/4	18	12
NPB12-03	61	30	10	17	R3/8	18	12
NPB12-04	61	31	11.5	21	R1/2	18	12

A08活接螺纹快插边三通NPD



型号Model	L1	L3	H	S	T	D1	D2
NPD4-M5	16	17	4.2	10	M5	9	4
NPD6-01	24	24	7	12	R1/8	12	6
NPD6-02	24	24	9	14	R1/4	12	6
NPD6-03	24	24	10	17	R3/8	12	6
NPD6-04	24	24	11.5	21	R1/2	12	6
NPD8-01	26	27	7	12	R1/8	14	8
NPD8-02	26	27	9	14	R1/4	14	8
NPD8-03	26	27	10	17	R3/8	14	8
NPD8-04	26	27	11.5	21	R1/2	14	8
NPD10-01	30	31	7	12	R1/8	16	10
NPD10-02	30	31	9	14	R1/4	16	10
NPD10-03	30	31	10	17	R3/8	16	10
NPD10-04	30	31	11.5	21	R1/2	16	10
NPD12-02	31	32	9	14	R1/4	18	12
NPD12-03	31	32	10	17	R3/8	18	12
NPD12-04	31	32	11.5	21	R1/2	18	12

A09 铰接式接头NPHL



型号Model	L1	L3	H	S	T	D1	D2
NPHL4-M5	22	19	4	8	M5	9	4
NPHL6-01	29	28	8	12	R1/8	12	6
NPHL6-02	30	31	10	15	R1/4	12	6
NPHL6-03	33	36	11	19	R3/8	12	6
NPHL6-04	34	39	14	22	R1/2	12	6
NPHL8-01	30	28	8	12	R1/8	14	8
NPHL8-02	31	31	10	15	R1/4	14	8
NPHL8-03	34	36	11	19	R3/8	14	8
NPHL8-04	36	39	14	22	R1/2	14	8
NPHL10-01	32	29	8	12	R1/8	16	10
NPHL10-02	33	32	10	15	R1/4	16	10
NPHL10-03	36	37	11	19	R3/8	16	10
NPHL10-04	38	41	14	22	R1/2	16	10
NPHL12-01	33	29	8	12	R1/8	18	12
NPHL12-02	33	33	10	15	R1/4	18	12
NPHL12-03	38	38	11	19	R3/8	18	12
NPHL12-04	40	41	14	22	R1/2	18	12

A10 活接加长快插弯头NPLL



型号Model	L3	L1	H	S	T	D1	D2
NPLL4-M5	20	18	4.5	10	M5	9	4
NPLL6-01	25	24	7	12	R1/8	12	6
NPLL6-02	25	26	9	14	R1/4	12	6
NPLL6-03	25	29	10	17	R3/8	12	6
NPLL6-04	25	31	11.5	21	R1/2	12	6
NPLL8-01	25	24	7	12	R1/8	14	8
NPLL8-02	25	26	9	14	R1/4	14	8
NPLL8-03	25	29	10	17	R3/8	14	8
NPLL8-04	25	31	11.5	21	R1/2	14	8
NPLL10-01	25	24	7	12	R1/8	16	10
NPLL10-02	25	26	9	14	R1/4	16	10
NPLL10-03	25	29	10	17	R3/8	16	10
NPLL10-04	25	31	11.5	21	R1/2	16	10
NPLL12-01	25	24	7	12	R1/8	18	12
NPLL12-02	25	26	9	14	R1/4	18	12
NPLL12-03	25	29	10	17	R3/8	18	12
NPLL12-04	25	31	11.5	21	R1/2	18	12

全金属快插接头系列 适合：尼龙管，PE管，PU管

诺恒气动

A11Y 型三通螺纹快插 NPYD



型号Model	L1		H	S	T	D1	D2
NPYD4-M5	31		4.5	10	M5	9	4
NPYD6-01	35		7	12	R1/8	12	6
NPYD6-02	37		9	14	R1/4	12	6
NPYD6-03	39		10	19	R3/8	12	6
NPYD6-04	41		11.5	21	R1/2	12	6
NPYD8-01	50		7	12	R1/8	14	8
NPYD8-02	51		9	14	R1/4	14	8
NPYD8-03	52		10	19	R3/8	14	8
NPYD8-04	54		11.5	21	R1/2	14	8
NPYD10-01	53		7	12	R1/8	16	10
NPYD10-02	55		9	14	R1/4	16	10
NPYD10-03	57		10	19	R3/8	16	10
NPYD10-04	60		11.5	21	R1/2	16	10
NPYD12-01	56		7	12	R1/8	18	12
NPYD12-02	58		9	14	R1/4	18	12
NPYD12-03	61		10	19	R3/8	18	12
NPYD12-04	63		11.5	21	R1/2	18	12

A12 四通螺纹快插 NPZR



型号Model	L1	L2+L3	H	S	T	D1	D2
NPZR6-01	44	48	7	12	R1/8	12	6
NPZR6-02	44	49	9	14	R1/4	12	6
NPZR6-03	44	50	10	19	R3/8	12	6
NPZR6-04	44	51.5	11.5	21	R1/2	12	6
NPZR8-01	50	53	7	12	R1/8	14	8
NPZR8-02	50	55	9	14	R1/4	14	8
NPZR8-03	50	56	10	19	R3/8	14	8
NPZR8-04	50	57.5	11.5	21	R1/2	14	8
NPZR10-01	59	62	7	12	R1/8	16	10
NPZR10-02	59	64	9	14	R3/8	16	10
NPZR10-03	59	65	10	19	R1/2	16	10
NPZR10-04	59	66.5	11.5	21	R1/2	16	10
NPZR12-01	60	62	7	12	R1/8	18	12
NPZR12-02	60	63	9	14	R1/4	18	12
NPZR12-03	60	64	10	19	R3/8	18	12
NPZR12-04	60	67.5	11.5	21	R1/2	18	12

A13 快插直通 NPU

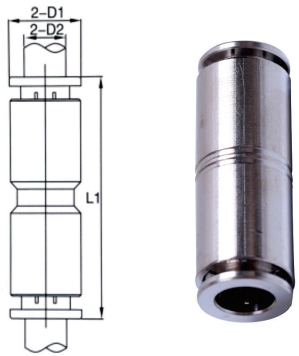

型号Model	L1	D1	D2
NPU4	32	9	4
NPU6	41	12	6
NPU8	42	14	8
NPU10	44	16	10
NPU12	44	18	12
NPU14	51	21	14
NPU16	53	23	16

A14 直通穿板快插 NPM



型号Model	L1	L2	M	D1	D2
NPM4	29	19	M12*1	9	4
NPM6	41	28	M14*1	12	6
NPM8	42	27.5	M16*1	14	8
NPM10	43	30	M18*1	16	10
NPM12	45	32	M20*1	18	12

全金属快插接头系列 适合：尼龙管，PE管，PU管
诺恒气动

A15 快插弯头 NPV

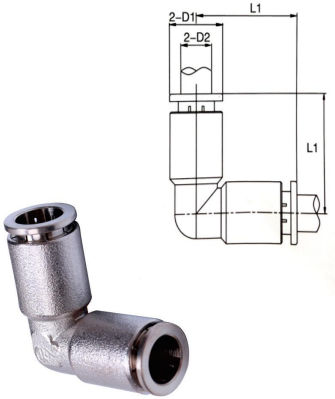

型号Model	L1	D1	D2
NPV4	18	9	4
NPV6	24	12	6
NPV8	26	14	8
NPV10	30	16	10
NPV12	32	18	12

A16 快插三通 NPT

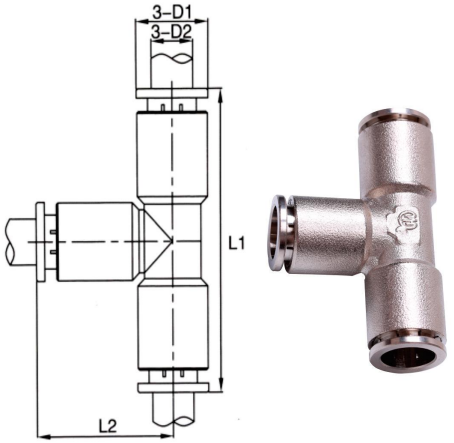

型号Model	L1	D1	D2
NPT4	35	9	4
NPT6	47	12	6
NPT8	52	14	8
NPT10	59	16	10
NPT12	62	18	12
NPT14	76	21	14
NPT16	76	23	16

A17 Y型快插三通 NPY

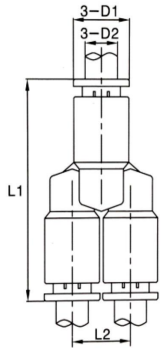

型号Model	L1	D1	D2
NPY4	32	9	4
NPY6	48	12	6
NPY8	50	14	8
NPY10	51	16	10
NPY12	58	18	12

A18 快插四通 NPXL



型号Model	L1	D1	D2
NPXL6	49	12	6
NPXL8	51	14	8
NPXL10	59	16	10
NPXL12	60	18	12

全金属快插接头系列，适合：尼龙管，PE管，PU管
诺恒气动

A19 变径快插 NPUB



型号Model	L1	D1	D2	d1	d2
NPUB4-6	36	9	4	12	6
NPUB6-8	41	12	6	14	8
NPUB6-10	42	12	6	16	10
NPUB8-10	43	14	8	16	10
NPUB8-12	43	14	8	18	12
NPUB10-12	44	16	10	18	12
NPUB12-14	50	18	12	21	14
NPUB12-16	51	18	12	23	16
NPUB14-16	53	21	21	23	16

A20 Y型变径快插三通 NPYB



型号Model	L1	D1	D2	d1	d2
NPYB6-4*2	48	12	6	9	4
NPYB8-6*2	48	14	8	12	6
NPYB10-8*2	50	16	10	14	8
NPYB10-6*2	50	16	10	12	6
NPYB12-8*2	58	18	12	14	8
NPYB12-10*2	58	18	12	16	10

A21 变径快插三通 NPTB

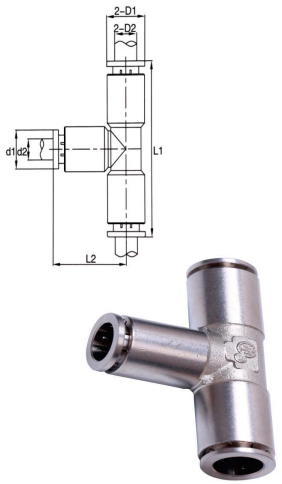

型号Model	L1	L2	D1	D2	d1	d2
NPTB6-4*2	47	22	9	4	12	6
NPTB8-6*2	52	25	12	6	14	8
NPTB10-6*2	59	28	12	6	16	10
NPTB10-8*2	59	30	14	8	16	10
NPTB12-10*2	60	30	16	10	18	12
NPTB12-8*2	60	30	14	8	18	12
NPTB16-12*2	68	34	18	12	23	16

A22 螺纹直通快插带O型圈 NPCG



型号Model	L1	H	T	S1	S2	D1	D2
NPCG4-M5	22	4	M5	2	10	9	4
NPCG6-01	25	7	G1/8	5	14	12	6
NPCG6-02	28	9	G1/4	5	17	12	6
NPCG6-03	24	11	G3/8	5	21	12	6
NPCG6-04	25	13	G1/2	5	24	12	6
NPCG8-01	28	7	G1/8	6	14	14	8
NPCG8-02	28	9	G1/4	6	17	14	8
NPCG8-03	25	11	G3/8	6	21	14	8
NPCG8-04	26	13	G1/2	6	24	14	8
NPCG10-01	28	7	G1/8	8	17	16	10
NPCG10-02	29	9	G1/4	8	19	16	10
NPCG10-03	26	11	G3/8	8	21	16	10
NPCG10-04	27	13	G1/2	8	24	16	10
NPCG12-01	31	7	G1/8	10	17	18	12
NPCG12-02	32	9	G1/4	10	19	18	12
NPCG12-03	30	11	G3/8	10	21	18	12
NPCG12-04	31	13	G1/2	10	24	18	12

全金属快插接头系列 适合：尼龙管，PE管，PU管

诺恒气动

A23 螺纹快插弯头带O型圈 NPLG

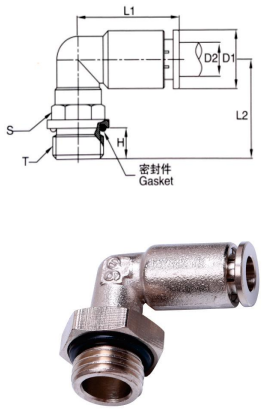

型号Model	L1	L2	H	T	S	D1	D2
NPLG4-M5	18	15	5	M5	10	9	4
NPLG4-01	18	19	7	G1/8	14	9	4
NPLG6-01	24	21	7	G1/8	14	12	6
NPLG6-M10*1	24	21	8	M10*1	14	12	6
NPLG6-02	24	23	9	G1/4	17	12	6
NPLG6-03	24	25	11	G3/8	21	12	6
NPLG6-04	24	26	12.5	G1/2	26	12	6
NPLG8-01	26	22	8	G1/8	14	14	8
NPLG8-02	26	24	9	G1/4	17	14	8
NPLG8-03	26	26	11	G3/8	21	14	8
NPLG8-04	26	27	12.5	G1/2	26	14	8
NPLG10-01	29	23	8	G1/8	14	16	10
NPLG10-02	29	25	9	G1/4	17	16	10
NPLG10-03	29	27	11	G3/8	21	16	10
NPLG10-04	29	28	12.5	G1/2	26	16	10
NPLG12-01	31	24	8	G1/8	14	18	12
NPLG12-02	31	26	9	G1/4	17	18	12
NPLG12-03	31	28	11	G3/8	21	18	12
NPLG12-04	31	29	12.5	G1/2	26	18	12

A24 中间螺纹活接三通带O型圈NPBG

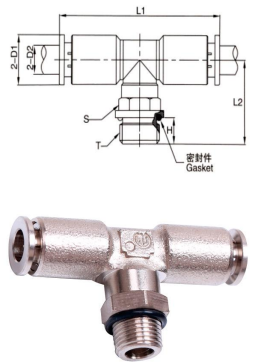

型号Model	L1	L2	H	T	S	D1	D2
NPBG6-01	35	22	8	G1/8	14	12	6
NPBG6-02	47	24	9	G1/4	17	12	6
NPBG6-03	52	26	11	G3/8	21	12	6
NPBG6-04	59	28	12.5	G1/2	26	12	6
NPBG8-01	35	23	8	G1/8	14	14	8
NPBG8-02	47	25	9	G1/4	17	14	8
NPBG8-03	52	27	11	G3/8	21	14	8
NPBG8-04	59	29	12.5	G1/2	26	14	8
NPBG10-01	35	24	8	G1/8	14	16	10
NPBG10-02	47	26	9	G1/4	17	16	10
NPBG10-03	52	28	11	G3/8	21	16	10
NPBG10-04	59	30	12.5	G1/2	26	16	10
NPBG12-01	35	25	8	G1/8	14	18	12
NPBG12-02	47	27	9	G1/4	17	18	12
NPBG12-03	52	29	11	G3/8	21	18	12
NPBG12-04	59	31	12.5	G1/2	26	18	12

A25 单向节流阀 NJSC

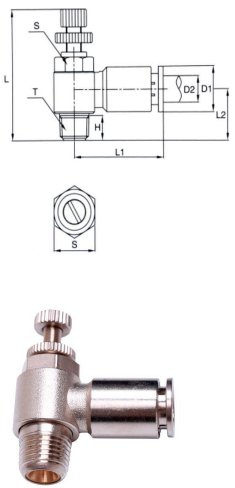

型号Model	L	L1		H	S	T	D1	D2
NJSC4-M5	30	22		4	8	M5	9	4
NJSC6-M5	35	28		4	8	M5	12	6
NJSC6-01	40	31		8	12	R1/8	12	6
NJSC6-02	45	32		10	15	R1/4	12	6
NJSC6-03	52	34		11	19	R3/8	12	6
NJSC6-04	58	38		14	22	R1/2	12	6
NJSC8-01	40	32		8	12	R1/8	14	8
NJSC8-02	45	33		10	15	R1/4	14	8
NJSC8-03	52	34		11	19	R3/8	14	8
NJSC8-04	58	39		14	22	R1/2	14	8
NJSC10-01	40	33		8	12	R1/8	16	10
NJSC10-02	45	34		10	15	R1/4	16	10
NJSC10-03	52	35		11	19	R3/8	16	10
NJSC10-04	58	36		14	22	R1/2	16	10
NJSC12-01	40	34		8	12	R1/8	18	12
NJSC12-02	45	35		10	15	R1/4	18	12
NJSC12-03	52	36		11	19	R3/8	18	12
NJSC12-04	58	38		14	22	R1/2	18	12

A26 内螺纹调速阀 NJSF

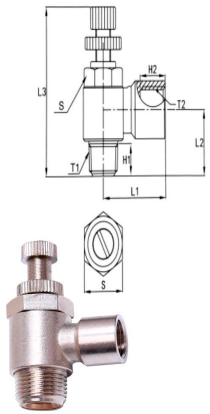

型号Model	L1	L2	L3	H1	H2	S	T1
NJSF01-01	22	16		8	8	12	G1/8
NJSF02-02	26	20		10	10	15	G1/4
NJSF03-03	32	23		11	11	19	G3/8
NJSF04-04	37	26		14	14	22	G1/2

全金属快插接头系列 适合：尼龙管，PE管，PU管
诺恒气动

A27 一字单向调速阀 NJSD

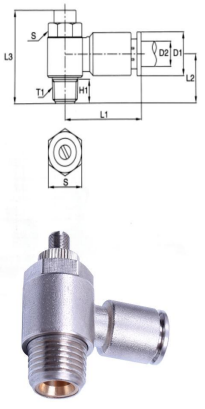

型号Model	L1		L3	H	S	T	D1	D2
NLSYD4-M5	22		23	4	8	M5	9	4
NLJSD6-M5	28		28	4	8	M5	12	6
NJSD6-01	31		32	8	12	R1/8	12	6
NJSD6-02	32		35	10	15	R1/4	12	6
NJSD6-03	34		41	11	19	R3/8	12	6
NJSD6-04	38		44	14	22	R1/2	12	6
NJSD8-01	32		32	8	12	R1/8	14	8
NJSD8-02	33		35	10	15	R1/4	14	8
NJSD8-03	34		41	11	19	R3/8	14	8
NJSD8-04	39		44	14	22	R1/2	14	8
NJSD10-01	33		32	8	12	R1/8	16	10
NJSD10-02	34		35	10	15	R1/4	16	10
NJSD10-03	35		41	11	19	R3/8	16	10
NJSD10-04	36		44	14	22	R1/2	16	10
NJSD12-01	34		32	8	12	R1/8	18	12
NJSD12-02	35		35	10	15	R1/4	18	12
NJSD12-03	36		41	11	19	R3/8	18	12
NJSD12-04	38		44	14	22	R1/2	18	12

A28 方向型调速阀 NJSL

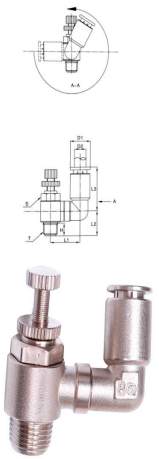

型号Model	L1	L2	L3	S	H	T	D1	D2
NJSL4-M5	18	10	18	8	4	M5	9	4
NJSL6-M5	20	11	29	12	4	M5	9	4
NJSL6-01	22	16	29	12	8	R1/8	12	6
NJSL6-02	24	17	29	15	10	R1/4	12	6
NJSL6-03	25	21	29	19	11	R3/8	12	6
NJSL6-04	27	23	29	22	14	R1/2	12	6
NJSL8-01	23	15	30	12	8	R1/8	14	8
NJSL8-02	25	15	30	15	10	R1/4	14	8
NJSL8-03	26	20	30	19	11	R3/8	14	8
NJSL8-04	28	23	30	22	14	R1/2	14	8
NJSL10-01	26	16	31	12	8	R1/8	16	10
NJSL10-02	26	19	31	15	10	R1/4	16	10
NJSL10-03	28	21	31	19	11	R3/8	16	10
NJSL10-04	31	24	31	22	14	R1/2	16	10
NJSL12-01	19	16	34	12	8	R1/8	18	12
SJSL12-02	30	18	34	15	10	R1/4	18	12
NJSL12-03	32	21	34	19	11	R3/8	18	12
NJSL12-04	34	24	34	22	14	R1/2	18	12

全金属快插接头系列 适合：尼龙管，PE管，PU管

A29 快插转换接头 NPZH	型号Model	L1	L2	L3	S	H	T	D1	D2
	NPZH4--6								
	NPZH6--4								
	NPZH6--8								
	NPZH6--10								
	NPZH6--12								
	NPZH8--6								
	NPZH8--10								
	NPZH8-12								
	NPZH10--6								
	NPZH10--8								
	NPZH10--12								
	NPZH12--6								
	NPZH12--8								
	NPZH12--10								
	NPZH12--14								
	NPZH12--16								

A30 快插分配器 NP-FPQ	型号Model	L	L1	S1	S2	T	H
	NP-FPQ-3						
	NP-FPQ-4						
	NP-FPQ-5						
	NP-FPQ-6						
	NP-FPQ-7						
	NP-FPQ-8						
	NP-FPQ-9						
	NP-FPQ-10						
	NP-FPQ-12						

全铜镀镍快拧接头产品介绍

特点/Characteristic

◆全铜镀镍快拧接头可与 PA 、PU 气管配合使用于各种气动管类系统。
Nickle-plated full brass push on fittings are widely used in pneumatic system with PA,PU pipes.
◆全自动数控加工处理
Automatic numerical control processing
◆可旋转螺纹体可以360度自由转动，使用方便。
Rotatable thread body makes connect direction is available at 360 °after installation.
◆安装方式：将气管插入后用扳手把螺帽旋紧，连接安全可靠。
Installation：Insert the pipe and tighten the nut with wrench,secure connection.

产品结构/Structure

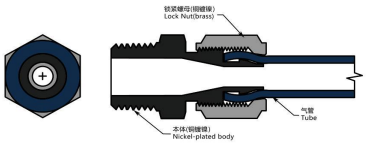

产品参数/Specifications

使用流体/Fluid	空气、液体（有条件）/Air,Liquid(conditional)
工作压力范围/Operating pressure	0.1-2.5Mpa
工作温度范围/Working temperature	-30- 220℃

型号说明/Model description

A01NPC	8	-	01
系列号 Series code	气管外径 Tube size		螺纹规格 thread

气管外径 /Tube diameter

公制尺寸/Metric Size							
代码code	4	6	8	10	12	14	16
直径 DIA	4mm	6mm	8mm	10mm	12mm	14mm	16mm

螺纹规格 /thread size

55° 锥管螺纹/55° taper thread size					
代码/code	01	02	03	04	06
型号/Size	R1/8	R1/4	R3/8	R1/2	R3/4

	公制螺纹/Metric Size			55° 直管螺纹/55° G Thread			
代码/code	M5	M6	M8	G01	G02	G03	G04
型号/Size	M5*0.8	M6*1.0	M8*1.25	G1/8	G1/4	G3/8	G1/2

美制螺纹/American Standard Taper Thread(NPT)					
代码/code	01	02	03	04	06
型号/Size	NPT1/8	NPT1/4	NPT3/8	NPT1/2	NPT3/4

B01 活接快拧弯头 NKL



型号Model	L	L1	S1	S2	T	H
NKL4-M5	17	18	8	10	M5	4.5
NKL6-M5	21	19	12	10	M5	4.5
NKL6-01	21	22	12	12	R1/8	7.5
NKL6-02	21	24	12	14	R1/4	9
NKL6-03	21	26	12	17	R3/8	10.5
NKL6-04	21	27	12	21	R1/2	12
NKL8-01	25	22	13	12	R1/8	7.5
NKL8-02	25	24	13	14	R1/4	9
NKL8-03	25	26	13	17	R3/8	10.5
NKL8-04	25	27	13	21	R1/2	12
NKL10-01	25	24	15	12	R1/8	7.5
NKL10-02	25	26	15	14	R1/4	9
NKL10-03	25	27	15	17	R3/8	10.5
NKL10-04	25	28	15	21	R1/2	12
NKL12-01	26	25	17	12	R1/8	7.5
NKL12-02	26	27	17	14	R1/4	9
NKL12-03	26	28	17	17	R3/8	10.5
NKL12-04	26	29	17	21	R1/2	12
NKL16-02	31	29	22	14	R1/4	9
NKL16-03	31	30	22	17	R3/8	10.5
NKL16-04	31	31	22	21	R1/2	12
NKL16-06	31	35	22	27	R3/4	15

B02 内螺纹活接快拧 NKLF



型号Model	L	L1	S1	S2	H	T
NKLF6-01	21	22	12	14	8	RC1/8
NKLF6-02	21	23	12	16	9.5	RC1/4
NKLF6-03	21	26	12	21	11	RC3/8
NKLF6-04	21	27	12	24	13	RC1/2
NKLF8-01	25	23	13	14	8	RC1/8
NKLF8-02	25	25	13	16	9.5	RC1/4
NKLF8-03	25	26	13	21	11	RC3/8
NKLF8-04	25	28	13	24	13	RC1/2
NKLF10-01	25	24	15	14	8	RC1/8
NKLF10-02	25	26	15	16	9.5	RC1/4
NKLF10-03	25	28	15	21	11	RC3/8
NKLF10-04	25	29	15	24	13	RC1/2
NKLF12-02	26	27	17	16	9.5	RC1/4
NKLF12-03	26	29	17	21	11	RC3/8
NKLF12-04	26	30	17	24	13	RC1/2

快拧接头系列 适合：PU管，PE管尼龙管连接

诺恒气动

B03 加长活接快拧弯头NKLL

型号Model	L	L1	S1	S2	H	T
NKLL6--01						
NKLL6-02						
NKLL6-03						
NKLL6-04						
NKLL8-01						
NKLL8-02						
NKLL8-03						
NKLL8-04						
NKLL10-01						
NKLL10-02						
NKLL10-03						
NKLL10-04						
NKLL12-01						
NKLL12-02						
NKLL12-03						
NKLL12-04						

B04 中间螺纹活接快拧三通NKTB



型号Model	L	L1	S1	S2	T	D
NKTB6-01	39	21	12	12	R1/8	6
NKTB6-02	39	22	12	14	R1/4	6
NKTB6-03	39	23	12	17	R3/8	6
NKTB6-04	39	24	12	21	R1/2	6
NKTB8-01	40	22	13	12	R1/8	8
NKTB8-02	40	23	13	14	R1/4	8
NKTB8-03	40	24	13	17	R3/8	8
NKTB8-04	40	25	13	21	R1/2	8
NKTB10-01	47	23	15	12	R1/8	10
NKTB10-02	47	24	15	14	R1/4	10
NKTB10-03	47	25	15	17	R3/8	10
NKTB10-04	47	26	15	21	R1/2	10
NKTB12-01	48	24	17	12	R1/8	12
NKTB12-02	48	25	17	14	R1/4	12
NKTB12-03	48	26	17	17	R3/8	12
NKTB12-04	48	27	17	21	R1/2	12

B05 边螺纹活接快拧三通NKTD

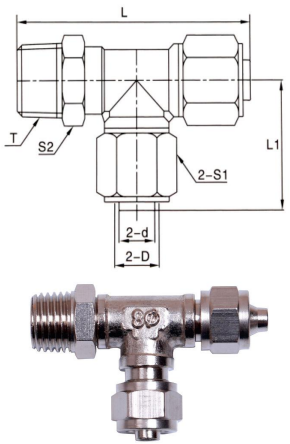

型号Model	L	L1	S1	S2	T	D
NKTD6-01	40	20	12	12	R1/8	6
NKTD6-02	41	20	12	14	R1/4	6
NKTD6-03	42	20	12	17	R3/8	6
NKTD6-04	43	20	12	21	R1/2	6
NKTD8-01	41	21	13	12	R1/8	8
NKTD8-02	42	21	13	14	R1/4	8
NKTD8-03	43	21	13	17	R3/8	8
NKTD8-04	44	21	13	21	R1/2	8
NKTD10-01	50	24	15	12	R1/8	10
NKTD10-02	51	24	15	14	R1/4	10
NKTD10-03	52	24	15	17	R3/8	10
NKTD10-04	53	24	15	21	R1/2	10
NKTD12-01	51	25	17	12	R1/8	12
NKTD12-02	52	25	17	14	R1/4	12
NKTD12-03	53	25	17	17	R3/8	12
NKTD12-04	54	25	17	21	R1/2	12

B06 直角铰接式快拧接头NKH

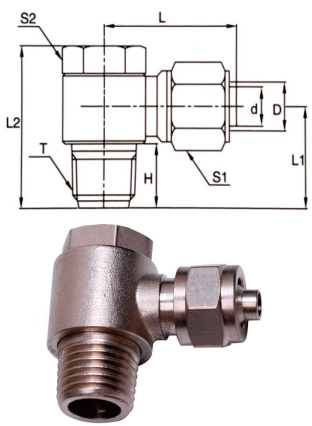

型号Model	L	L2	S1	S2	H	T	D*d
NKH4-M5	17	19	8	8	4	M5	4*2
NKH6-01	22	27	12	12	8.5	R1/8	6*4
NKH6-02	27	30	12	14	10	R1/4	6*4
NKH6-03	30	36	12	19	11	R3/8	6*4
NKH6-04	30	39	12	22	13	R1/2	6*4
NKH8-01	22	27	13	12	8.5	R1/8	8*5
NKH8-02	27	30	13	14	10	R1/4	8*5
NKH8-03	30	36	13	19	11	R3/8	8*5
NKH8-04	30	39	13	22	13	R1/2	8*5
NKH10-01	24	27	15	12	8.5	R1/8	10*6.5
NKH10-02	29	30	15	14	10	R1/4	10*6.5
NKH10-03	31	36	15	19	11	R3/8	10*6.5
NKH10-04	32	39	15	22	13	R1/2	10*6.5
NKH12-01	26	27	17	12	8.5	R1/8	12*8
NKH12-02	30	30	17	14	10	R1/4	12*8
NKH12-03	32	36	17	17	11	R3/8	12*8
NKH12-04	34	39	17	22	13	R1/2	12*8

快拧接头系列 适合：PU管，PE管尼龙管连接

诺恒气动

B07 活接边螺纹快拧四通NKZR

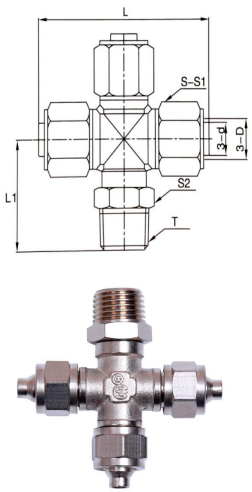

型号Model	L	L1	S1	S2	T	D
NKZR6-01	41	21	12	12	ZG1/8	6
NKZR6-02	41	21	12	14	ZG1/4	6
NKZR6-03	41	22	12	17	ZG3/8	6
NKZR6-04	41	23	12	21	ZG1/2	6
NKZR8-01	42	21	13	12	ZG1/8	8
NKZR8-02	42	22	13	14	ZG1/4	8
NKZR8-03	42	23	13	17	ZG3/8	8
NKZR8-04	42	24	13	21	ZG1/2	8
NKZR10-01	43	26	15	12	ZG1/8	10
NKZR10-02	43	27	15	14	ZG1/4	10
NKZR10-03	43	28	15	17	ZG3/8	10
NKZR10-04	43	29	15	21	ZG1/2	10
NKZR12-01	44	27	17	12	ZG1/8	12
NKZR12-02	44	28	17	14	ZG1/4	12
NKZR12-03	44	29	17	17	ZG3/8	12
NKZR12-04	44	30	17	21	ZG1/2	12

B08 快拧单向调速阀NKSL

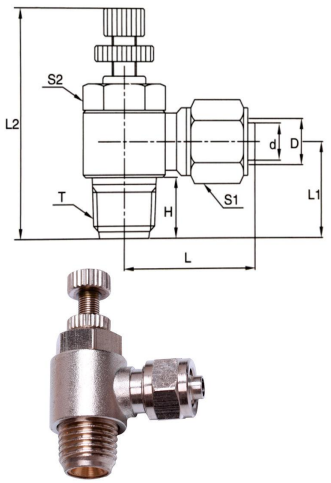

型号Model	L2	L	S1	S2	H	T	D
NKSL4-M5	29	18	8	8	4	M5	4
NKSL4-M6	29	18	8	8	4	M6	4
NKSL6-M5	38	23	12	12	4	M5	6
NKSL6-01	40	23	12	12	8	ZG1/8	6
NKSL6-02	42	26	12	14	10	ZG1/4	6
NKSL6-03	51	28	12	19	11	ZG3/8	6
NKSL6-04	56	29	12	22	14	ZG1/2	6
NKSL8-01	40	23	13	12	8	ZG1/8	8
NKSL8-02	42	26	13	14	10	ZG1/4	8
NKSL8-03	51	30	13	19	11	ZG3/8	8
NKSL8-04	56	31	13	22	14	ZG1/2	8
NKSL10-01	40	24	15	12	8	ZG1/8	10
NKSL10-02	42	27	15	14	10	ZG1/4	10
NKSL10-03	51	31	15	19	11	ZG3/8	10
NKSL10-04	56	32	15	22	14	ZG1/2	10
NKSL12-01	40	25	17	12	8	ZG1/8	12
NKSL12-02	42	28	17	14	10	ZG1/4	12
NKSL12-03	51	31	17	19	11	ZG3/8	12
NKSL12-04	56	33	17	22	14	ZG1/2	12

B09 三通快拧 NKT



型号Model	L	L1	S1	Dxd（Φ）
NKT6	40	21	12	6
NKT8	44	23	13	8
NKT10	46	23	15	10
NKT12	49	25	17	12

B10 四通快拧 NKZA



型号Model	L	S1	Dxd（Φ）
NKZA6	43	12	6
NKZA8	45	13	8
NKZA10	50	15	10
NKZA12	52	17	12

快拧接头系列 适合：PU管，PE管尼龙管连接
诺恒气动

B11 外螺纹直通快拧带O型圈 NKCG





型号Model	L	H	T	S1	S2	D*d
NKCG4-M5	20	4.5	M5	8	10	4*2
NKCG6-01	24	7	G1/8	12	14	6*4
NKCG6-02	26	9	G1/4	12	17	6*4
NKCG6-03	27	11	G3/8	12	21	6*4
NKCG6-04	29	13	G1/2	12	24	6*4
NKCG8-01	24	7	G1/8	13	14	8*5
NKCG8-02	26	9	G1/4	13	17	8*5
NKCG8-03	28	11	G3/8	13	21	8*5
NKCG8-04	29	13	G1/2	13	24	8*5
NKCG10-01	26	7	G1/8	15	17	10*6.5
NKCG10-02	28	9	G1/4	15	17	10*6.5
NKCG10-03	31	11	G3/8	15	21	10*6.5
NKCG10-04	32	13	G1/2	15	24	10*6.5
NKCG12-01	27	7	G1/8	17	17	12*8
NKCG12-02	29	9	G1/4	17	19	12*8
NKCG12-03	32	11	G3/8	17	21	12*8
NKCG12-04	33	13	G1/2	17	24	12*8
NKCG16-04	36	13	G1/2	22	27	16*12

B12 活接直角快拧带O型圈 NKLG



型号Model	L1	L2	H	T	S1	S2	D*d
NKLG4-M5	17	15	5	M5	8	10	4*2
NKLG6-01	21	22	8	G1/8	12	14	6*4
NKLG6-02	21	23	9	G1/4	12	17	6*4
NKLG6-03	21	26	11	G3/8	12	21	6*4
NKLG6-04	21	28	12.5	G1/2	12	26	6*4
NKLG8-01	25	25	8	G1/8	13	14	8*5
NKLG8-02	25	26	9	G1/4	13	17	8*5
NKLG8-03	25	28	11	G3/8	13	21	8*5
NKLG8-04	25	30	12.5	G1/2	13	26	8*5
NKLG10-01	25	26	8	G1/8	15	14	10*6.5
NKLG10-02	25	27	9	G1/4	15	17	10*6.5
NKLG10-03	25	28	11	G3/8	15	21	10*6.5
NKLG10-04	25	30	12.5	G1/2	15	26	10*6.5
NKLG12-01	26	27	8	G1/8	17	14	12*8
NKLG12-02	26	28	9	G1/4	17	17	12*8
NKLG12-03	26	30	11	G3/8	17	21	12*8
NKLG12-04	26	31	12.5	G1/2	17	26	12*8
NKLG16-04	31	32	12.5	G1/2	22	26	16*12
NKLG16-06	31	36	14	G3/4	22	30	16*12

B13 中间螺纹活接快拧三通带O型圈 NKBG



型号Model	L	L1	H	T	S1	S2	D*d
NKBG6-01	39	22	8	G1/8	12	14	6*4
NKBG6-02	39	23	9	G1/4	12	17	6*4
NKPG6-03	39	24	11	G3/8	12	21	6*4
NKBG6-04	39	27	12.5	G1/2	12	26	6*4
NKBG8-01	40	22	8	G1/8	13	14	8*5
NKBG8-02	40	23	9	G1/4	13	17	8*5
NKBG8-03	40	25	11	G3/8	13	21	8*5
NKBG8-04	40	28	12.5	G1/2	13	26	8*5
NKBG10-01	47	23	8	G1/8	15	14	10*6.5
NKBG10-02	47	24	9	G1/4	15	17	10*6.5
NKBG10-03	47	26	11	G3/8	15	21	10*6.5
NKBG10-04	47	29	12.5	G1/2	15	26	10*6.5
NKBG12-01	48	25	8	G1/8	17	14	12*8
NKBG12-02	48	26	9	G1/4	17	17	12*8
NKBG12-03	48	27	11	G3/8	17	21	12*8
NKBG12-04	48	30	12.5	G1/2	17	26	12*8

B14 边螺纹活接快拧三通带O型圈 NKDG



型号Model	L	L1	H	T	S1	S	Dxd
NKDG6-01	42	20	8	G1/8	12	14	6*4
NKDG6-02	44	20	9	G1/4	12	17	6*4
NKDG6-03	46	20	11	G3/8	12	21	6*4
NKDG6-04	48	20	12.5	G1/2	12	26	6*4
NKDG8-01	42	21	8	G1/8	13	14	8*5
NKDG8-02	44	21	9	G1/4	13	17	8*5
NKDG8-03	46	21	11	G3/8	13	21	8*5
NKDG8-04	48	21	12.5	G1/2	13	26	8*5
NKDG10-01	43	22	8	G1/8	15	14	10*6.5
NKDG10-02	45	22	9	G1/4	15	17	10*6.5
NKDG10-03	47	22	11	G3/8	15	21	10*6.5
NKDG10-04	49	22	12.5	G1/2	15	26	10*6.5
NKDG12-01	44	24	8	G1/8	17	14	12*8
NKDG12-02	46	24	9	G1/4	17	17	12*8
NKDG12-03	48	24	11	G3/8	17	21	12*8
NKDG12-04	50	24	12.5	G1/2	17	26	12*8

快拧接头系列 适合：PU管，PE管尼龙管连接

诺恒气动

B15 直通快拧 NKC

B17内牙直通快拧-NKCF

B16公制螺纹直通快拧NKCM

B18压铸直角快拧-NKLY

B19方块直角快拧NKLB	B21大小头快拧直通NKCS
	
B20快拧直通NKCS	B22压铸三通快拧NKTY
	

快拧接头系列 适合：PU管，PE管尼龙管连接

诺恒气动

B23中间螺纹快拧三通NKTZ	B25方块快拧三通NKTB
	
B24边螺纹快拧三通NKTP	B26快拧穿板直通NKM
	

快拧接头系列 适合：PU管，PE管尼龙管连接

B27方块快拧四通NKZB	B29迷你快拧直角NKLM
	
B28迷你快拧直通NKCM	
	

黄铜卡套接头系列 适合：紫铜管连接

E01黄铜直通卡套NFC	E03黄铜直角卡套NFL
	
E02黄铜直通卡套NFU	E04卡套三通NFT
	

E05黄铜卡套弯头NFLU	E07终端卡套弯头NFDL
	
E06终端卡套直通接头NFDC	E08三通卡套 NFDT
	

电镀卡套接头系列 适合：紫铜管气管连接
诺恒气动

E09 终端三通卡套NFDB	E11 卡套弯头NFDLL
	
E10 直通卡套接头NFDU	E12 卡套单向调节阀NFSL
	

电镀卡套接头系列 适合：紫铜管气管连接

E13 针型阀NFDZ	E15 卡套四通NFDS
	
E14 内牙卡套直通NFDF	**E16 终端油路内卡直通接头NEK**
	

机床润滑接头系列

E17 终端油路内卡弯头NEKL	E19 油路分配器NY
	
E18 带调节油路分配器NYT	**E20 油路单向阀NYCV**
	

铜管扩口连接系列

E21 铜管扩口直通NSC	E23 铜管扩口直通NSU
	
E22 铜管扩口弯头NSL	E24 铜管扩口弯头NSLL
	

E25 铜管扩口三通NST	F02 活接直角宝塔NBHL
	
F01 宝塔直通接头NBC	F03 Y形宝塔三通NBY
	

F04 T形宝塔三通NBT	F06 直角宝塔接头NBL
	
F05 活接宝塔三件套NBHC	F07 四通宝塔接头NBZB
	

F08 内牙宝塔直通NBCF	G01 消声器NXSQ
	
F09 宝塔直通NBU	G02 平头消声器NPXSQ
	

消声器系列

G03 调速消声器NTXSQ	G05 排气消声节流阀B型NPXJB
	
G04 排气消声节流阀A型NPXJA	G06 内六角堵头NDT
	

堵头系列

G07 外六角堵头NDTW	G09 内六角ED带密封圈堵头NDTY
	
G08 外六角ED带密封圈堵头NDTE	G10 内牙堵头NDTH
	

H01 止回阀NZH	H03 内牙短柄球阀NDQF
	
H02 单向阀NCV	H04 内外短柄球阀NDQ
	

H05 长柄球阀NCQF	H07 自锁快速接头C式
	
H06 宝塔开关NCQ	H08 自锁快速接头A式
	

管路螺纹连接系列

J01 外牙接头NCY	J03 内牙接头NFY
	
J02 变径外牙接头NBCY	J04 变径内牙接头NBFY
	

管路螺纹连接系列

诺恒气动

J05 补心NBX	J08 内牙弯头NYLF
	
J06 内外牙接头NWY	J09 外牙弯头NYL
	

J10 内外牙弯头NYLB	J12 外牙三通NYT
	
J11 内牙三通NYTF	**J13 压铸四通NYZB**
	

管路螺纹连接系列
诺恒气动

J14 方块四通NYFB	
	
J15 方块内牙三通NYTK