

LYZ 型螺旋压榨机

LYZ Screw Press Machine

用途:Application


螺旋压榨机为格栅机配套设备,把格栅机捞取的污物通过该机压榨以减少其水份和体积,便于运输.

The screw press is a matching equipment for the grille machine.



The dirt picked up by the grille machine is pressed through the machine to reduce its water content and volume, which is convenient for transportation.

型号表示方法:Model of Model Denotation

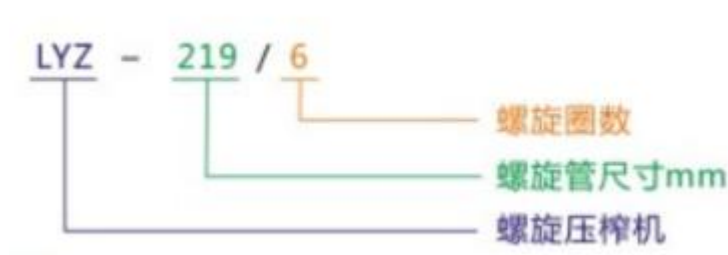

Numbers of screw

Size of screw

Screw Press Machine

特点: Characteristic


结构简单, 占地面积小, 安装维护方便;除进出料口敞开外, 其余部分均可加盖封闭, 物料不会外溢, 减少空气污染.

The structure is simple, the floor area is small, and the installation and maintenance are convenient; except for the opening of the inlet and outlet, the rest can be covered and closed, and the material will not overflow, reducing air pollution.

构造及工作原理:Structure and Working Principle

螺旋压榨机由挤压螺旋、螺旋管、传动部件、进料斗及卸料斗等组成。污物由进料斗进入螺旋

The screw press consists of extrusion screw, spiral tube, transmission parts, feed hopper and discharge hopper. Dirt enters the screw from the feed hopper

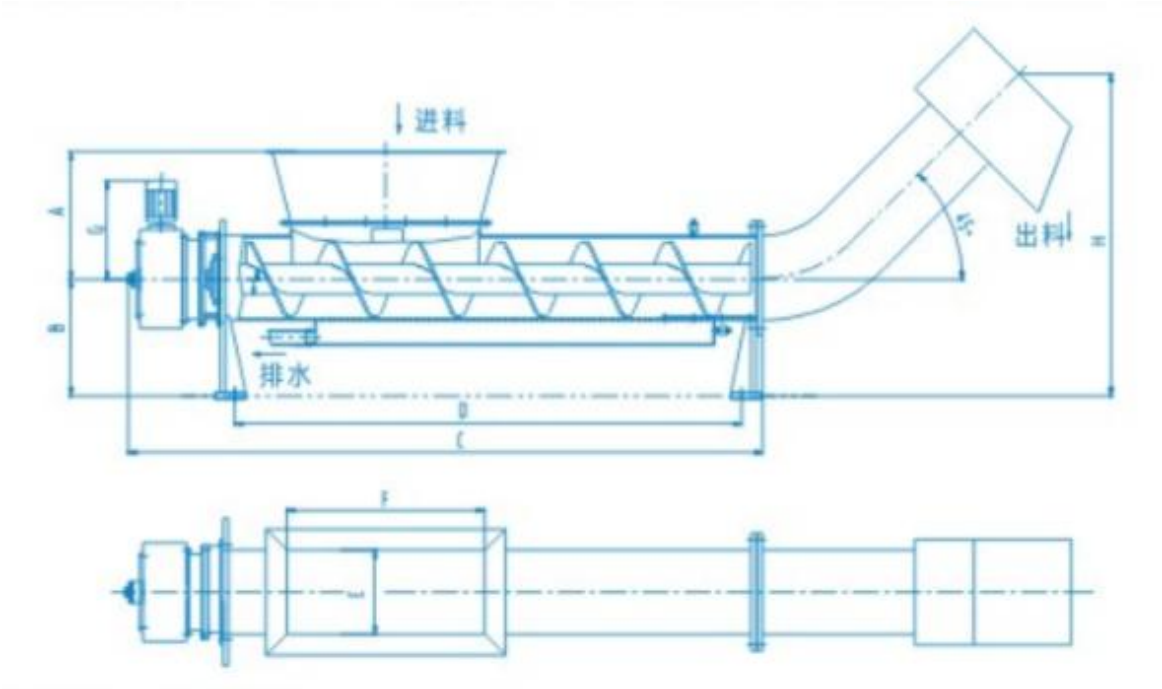

主要技术参数、尺寸表:Main technical parameters, size table:

型 号	螺旋圈数	螺旋管尺寸	A	B	C	D	E	F	G	H	功率kW
LYZ219/6	6	219	400	380	1500	1030	400	540	422	1000	1.1
LYZ219/9	9	219	400		2100	1570	400	1080	422	1000	1.1
LYZ219/11	11	219	400		2500	1930	400	1440	422	1000	1.1
LYZ299/6	6	299	500		2150	1380	450	750	501	1200	3
LYZ299/9	9	299	500		3050	2240	450	1500	501	1200	3
LYZ299/11	11	299	500		3650	2740	450	2250	501	1200	3
LYZ402/6	6	402	600		2700	1940	750	900	622	1350	5.5
LYZ402/9	9	402	600		3900	2930	750	1980	622	1350	5.5
LYZ402/11	11	402	600		4700	3590	750	2640	622	1350	5.5